


Contact insert - HC-M-MHMZ - 1676831

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Module locking, for accommodating contact insert modules, can be snapped together as desired, with strain relief



Key commercial data

Packing unit	1 pc
Minimum order quantity	2 pc
GTIN	 4 017918 150587
Weight per Piece (excluding packing)	12.0 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

General

Material	PC
Note	Contact inserts can be interlocked as required
Assembly instructions	Can be used for the HC-M-03-MOD...; HC-M-06-MOD...; HC-M-08-MOD...; HC-M-12-MOD... modules

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816

Contact insert - HC-M-MHMZ - 1676831

Classifications

eCl@ss

eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209

ETIM

ETIM 2.0	EC001121
ETIM 3.0	EC001121
ETIM 4.0	EC000438
ETIM 5.0	EC000438

UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

Approvals

Approvals


Approvals

UL Recognized / GOST

Ex Approvals

Approvals submitted

Approval details




Contact insert - HC-M-MHMZ - 1676831

Approvals



Drawings

Dimensioned drawing

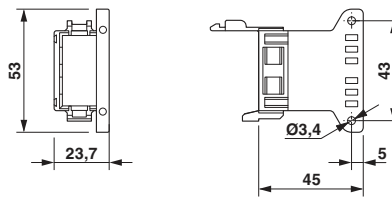

HC-M-MHMZ