


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/11/05	
A		REDRAWN	10/8/12	

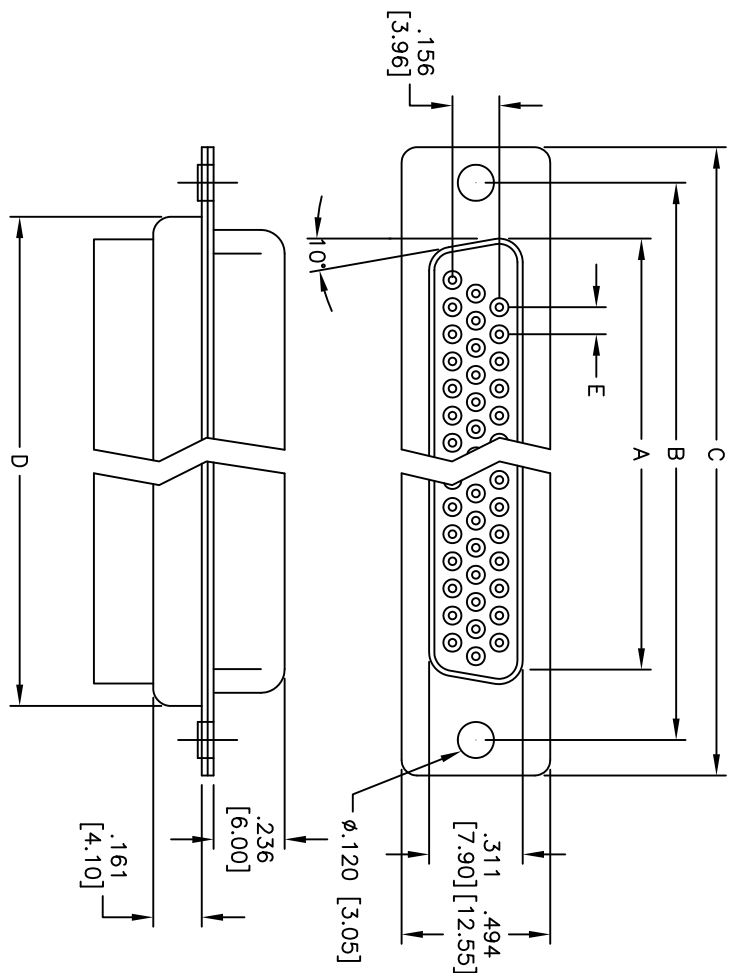

HDTXX	DIMENSIONS				
	A	B	C	D	E
15	.643 [16.33]	.984 [24.99]	1.213 [30.81]	.756 [19.20]	.090 [2.29]
26	.971 [24.66]	1.312 [33.32]	1.541 [39.14]	1.091 [27.70]	.090 [2.29]
44	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]	1.618 [41.10]	.090 [2.29]
62	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]	2.256 [57.30]	.095 [2.41]

SPECIFICATIONS:
 Material: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Steel, Tin plated
 Chinch Nut: Brass, Nickel plated
 Screwlock: Brass, Nickel plated
 Plating: Gold flash over Nickel underplate overall

Electrical:
 Insulation resistance: 1,000 Mohms min @500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
Environmental:
 Lead free, RoHS compliant

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

HIGH DENSITY D-SUB SOCKET
CRIMP & POKE, .120 [3.05] MOUNTING HOLES

UNLESS OTHERWISE SPECIFIED		ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED		INCHES	
Holes		Holes	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	SS	5/11/05	
CHECKED			
APPROVED			

SIZE	PART NO.	TITLE
X	HDTXX-SR	HIGH DENSITY D-SUB SOCKET
REF: S0008T	SCALE: NTS	CRIMP & POKE, .120 [3.05] MOUNTING HOLES
SHEET 1 OF 1		

