

т	۵	н <b>п</b>	m	0



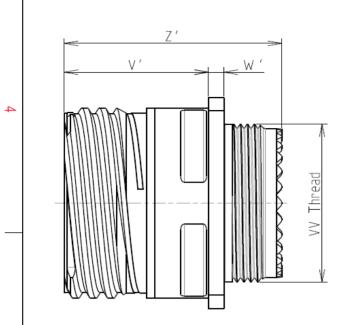



Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 20.1 g ± 10%

8D 0

G

13

J


26

В

F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M18x1-6g		

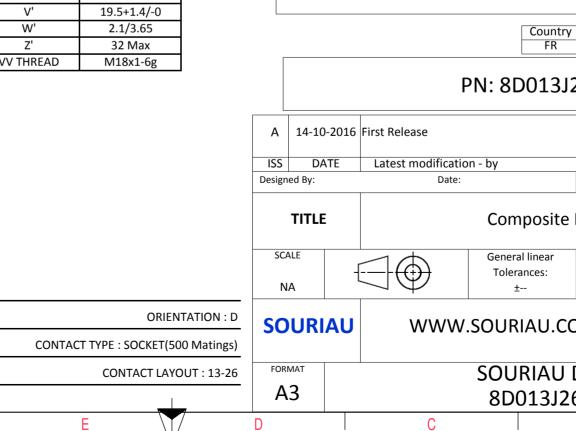

0		Φ	Þ			
LAY	OUT SHOWN AS EXA	MPLE			3	
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)						
PN: 8D013J26BD						
First Release Latest modificatio	n - by			MOD N°		
Date:	,		CUSTOMER DRAWING	1		
Composite Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PROJECT <b>859</b>		1	
WWW.SOURIAU.COM This document is the property of SOURIAU   it must not be reproduced or communicated without permission						
			SHEET			
С		B	A		J	

	Ŧ	Q	н <b>г</b>	m		0	
		Contact Layout				Ра	nel Cutou
		26				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
						R1	
4					1		
		o <sup>E</sup> o <sup>B</sup> o			2		
		2#12					
		6#22D 13-26	]		<u>*</u>		
	Ctc	X Y				ØA_	<u>T</u>
	AB	0 3.47 2.47 4.34					
	С	2.47 -4.34				Dim ØA	
ယ	D	0 -3.47 -2.47 -4.34				ØAA R1	
	F	-2.47 4.34				ØT	
	1	3.25 0 -3.25 0					
	2	5.25	]				
						SOURIAU shall not be liab due to a use of the Pro	
						the Specifications issued by (professional recor	y either of
							Country
N							FR
						PN: 80	D013J
					A 14-10-20	016 First Release	
_					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	Corr	nposite
					SCALE		al linear
<u> </u>					NA		rances: ±
					SOURIA	U WWW.SOUR	RIAU.C
					FORMAT	SOU	RIAU
					A3		013J2
	Н	G	F	E	D	C	

