


**Model 72925**  
**Do-It-Yourself 2mm Stackable Safety Sheathed Plug**

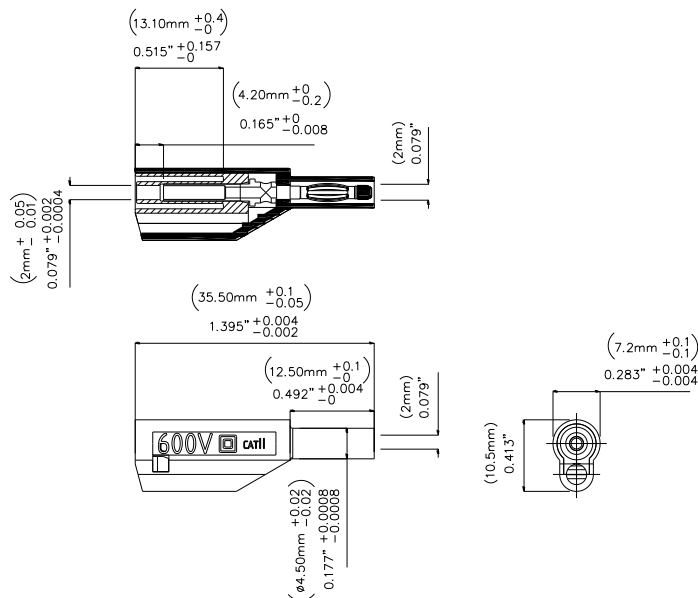

**Features**

- Build your own 2mm stackable test leads
- Plug spring is Beryllium Copper for long insertion life
- Safety rating CAT II 600V *when plug is correctly assembled and terminated.*

**Materials**

Plastic body: Polypropylene  
 Plug body: Brass, Nickel Plated  
 Spring: Beryllium Copper, Nickel Plated  
 Spring Tip: Polysulfone

**Specifications**

|                |                |
|----------------|----------------|
| Current        | Max. 10A       |
| Voltage        | 600 V CAT II   |
| Max Resistance | Less than 5 mΩ |

**Ordering Information**

Model **72925**-Color  
 Colors: **-0** (black) and **-2** (red)

**USA:** Sales: 800-490-2361  
 Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
 Fax: 425-446-5844  
**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.