



specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 Hours	Surge Protection	Ambient Temp (F)	Power Factor	UL Listing	THC	Beam Angle	Enclosed Fixture Rated
10 W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	50,000	1.5 KV built-in	-40° - 122°	> 0.9	damp location	< 20%	omni-directional	yes

select your lamp


Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-CC-360W50-UL4	3000K	E26	1,250	125 lm / W
GI-CC-360D50-UL4	4000K	E26	1,250	125 lm / W
GI-CC-360C50-UL4	5000K	E26	1,250	125 lm / W



other

Dimensions	Warranty	Gross Weight	Case QTY
8.27" (L) x 2.35" (D)	6 years	0.55 lbs	48 pcs


Wiring Diagram

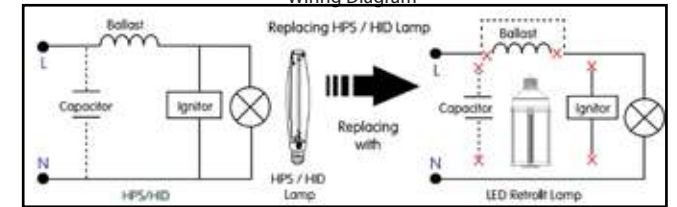


Features

- ▶ 6 year warranty
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Shatterproof

Distance vs Illumination



Isolux Diagram

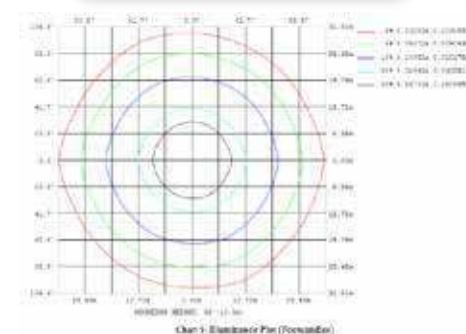

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

