

### MAG-MATE

TE Internal #: 62935-1 Magnet Wire Terminals, Poke-In, Size 2, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, Lead Wire Size 20 – 18 AWG, MAG-MATE

#### View on TE.com >

Terminals & Splices > Magnet Wire Terminals



Magnet Wire Terminal Type: Poke-In Compatible With Cavity Size: Size 2 Aluminum Wire Size: .51 – .64 mm Lead Wire Size: 20 – 18 AWG

## Features

#### Cont **D**. durat T.



Product Type Features	
Compatible With Discrete Wire Type	Magnet Wire, Solid
Body Features	
Compatible With Cavity Size	Size 2
Contact Features	
Magnet Wire Terminal Type	Poke-In
Terminal Plating Material	Tin
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Mechanical Attachment	
Mating Retention Type	Locking
Dimensions	
Terminal Height	7.62 mm[.3 in]
Aluminum Wire Size	.51 – .64 mm
Lead Wire Size	.5 – .9 mm²

Magnet Wire Terminals, Poke-In, Size 2, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, Lead Wire Size 20 – 18 AWG, MAG-MATE



Magnet Wire Size	.36 – .57 mm
Stock Thickness (Magnet Wire Side)	.41 mm[.016 in]
Product Length	7.87 mm[.31 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
Operation/Application	
Compatible With Wire Base Material	Aluminum, Copper
Identification Marking	
Identification Number	10
Packaging Features	
Packaging Quantity	12000
Packaging Method	Reel
Other	
Terminals & Splices Comment	Solid or overcoated stranded lead wire only., Two magnet wires may be terminated in the same terminal slot if diameters are equal.

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and	


based on the information they provided. This information is subject to change. The part numbers that TE has identified as

Magnet Wire Terminals, Poke-In, Size 2, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, Lead Wire Size 20 – 18 AWG, MAG-MATE



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

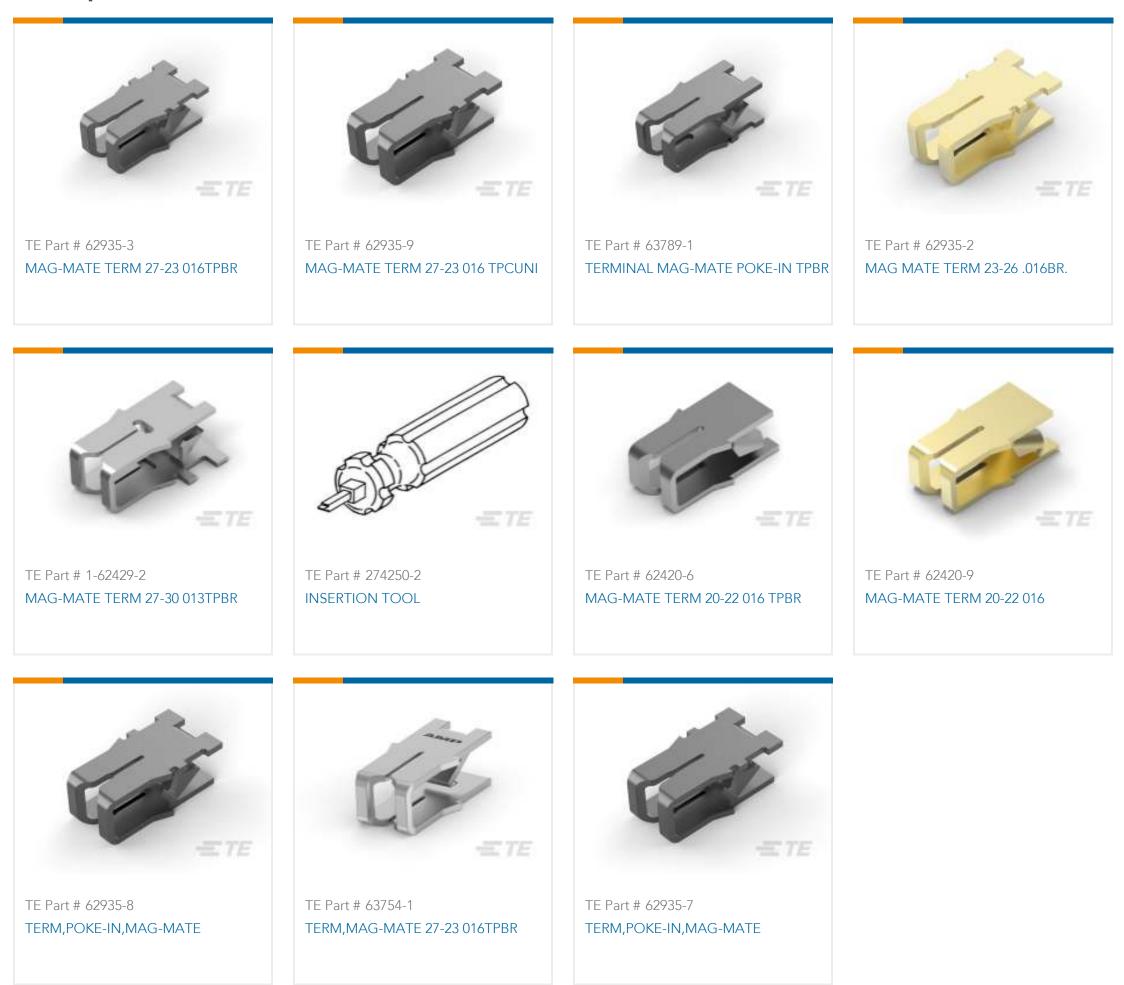


# Also in the Series | MAG-MATE



Magnet Wire Terminals, Poke-In, Size 2, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, Lead Wire Size 20 – 18 AWG, MAG-MATE



## Customers Also Bought

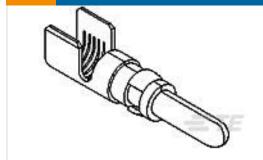

TE Part #213841-2 POWERBAND PIN CNT




TE Part #1742422-1 187 FASTON,REC.,18-14 OR 2-18 AWG,TPBR



TE Part #2321920-2 Connector Seals: 2.55 mm, Signal Double Lock



TE Part #2-1419129-2 OJ-SS-112LM,043



TE Part #690718-1 ANVIL-REVERSIBLE

## Documents

Product Drawings MAG-MATE TERM 27-23 016 TPBR

English

CAD Files

## 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_62935-1\_BY.2d\_dxf.zip

English

Customer View Model ENG\_CVM\_CVM\_62935-1\_BY.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_62935-1\_BY.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Magnet Wire Terminals & Splices

English

Product Specifications Application Specification

English

**Product Environmental Compliance** 

**C** For support call+1 800 522 6752

Magnet Wire Terminals, Poke-In, Size 2, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, Lead Wire Size 20 – 18 AWG, MAG-MATE



MD\_62935-1\_12282017734\_dmtec

English

MD\_62935-1\_12282017734\_dmtec

English