

Withwave's Terminations are composed of broadband, due to the coaxial construction, It offers a excellent performance specified from DC to 40 GHz.
Precision 2.92 mm coaxial connector interfaces ensure an good impedance match across wide bandwidth.



■ Features

- Frequency range : DC to 40 GHz
- VSWR : 1.30 : 1(Max) @ 40 GHz
- Stainless steel (passivated)

■ Specification


Scope	Specification	TM03-01-05
Electrical	Impedance(Ohm)	50
	Freq. range (GHz)	DC to 40 GHz
	VSWR (Max)	1.30 : 1
	Power rating	1 Watts
Material	Center Contact	BeCu with gold plated
	Body & Connector	Stainless Steel (Passivated)

* RoHS Compliant

■ Drawing

Part No.: TM03-01-05

Unit : mm

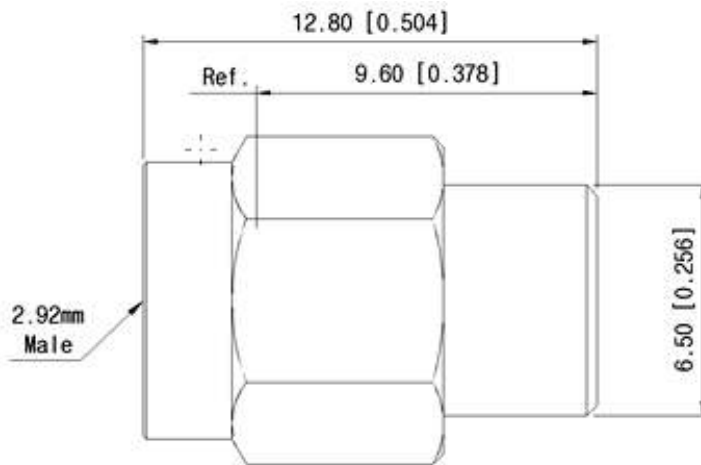

■ Test Result

