

P30H TRANSUCER OF D.C. CIRCUITS PARAMETERS WITH DATA RECORD AND ETHERNET

FEATURES:

- MOD BUS Slave
- MOD BUS Master
- MOD BUS Monitor
- eCon Program
- SD/SDHC
- Firmware upgrade
- RTC
- Password protection
- Ethernet
- www ftp
- CAN
- CAN open

INPUT:

- DC
- MOD BUS
- RS 485

OUTPUTS:

- Graph
- Supply
- RS 485
- CAN

GALVANIC ISOLATION:

- Supply
- RS 485
- Ethernet


Export department:
+48 68 45 75 138/ 233/
321/ 586
Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Sulechowska 1
65-022 Zielona Góra
POLAND
WWW.LUMEL.COM.PL



- Measurement of voltage, current, power, energy and other parameters in d.c. circuits.
- Conversion of measured value in an output signal on the base of the individual characteristic.
- 1 or 2 alarm relays with NO contact working in 6 modes.
- Additional supplying output 24 V d.c 30 mA switched-on/switched-off (option).
- Recording of input signals in internal memory, on SD/SDHC card (option) or internal file system memory (option).
- Interface RS-485 Modbus RTU.
- RS-485 Master/Monitor mode – possibility to poll 1 device.
- SD/SDHC support (option).
- Interface Ethernet 10/100 BASE-T (option).
- Protocol: Modbus TCP/IP, HTTP, FTP.
- Services: www server, ftp server, client DHCP.
- Interface CAN with CANopen protocol.

EXAMPLE OF APPLICATION

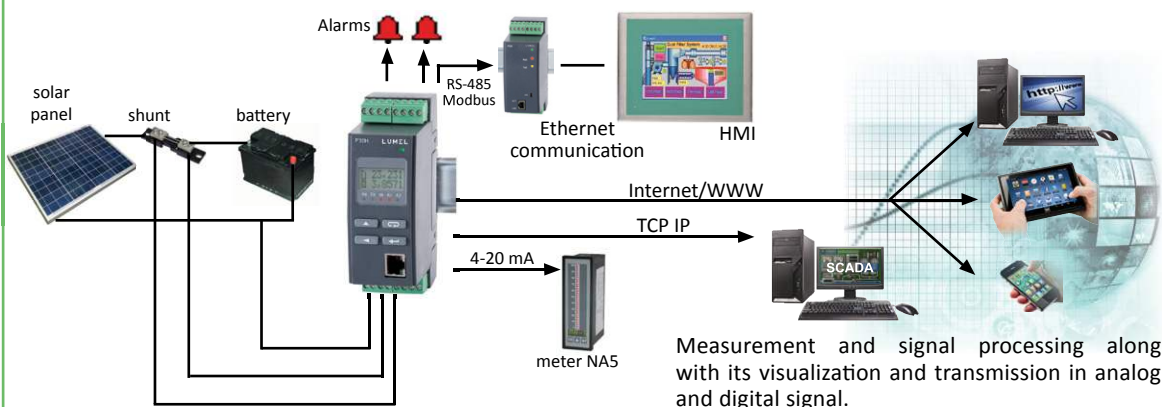

MEASURED AND CALCULATED VALUES BY THE TRANSUCER

- d.c. voltage **U** (direct or through additional resistor D5)
- d.c. current **I** (direct through shunt)
- power of d.c. current **P**
- voltage difference in time **dU** (5 s, 30 s, 1 min, 5 min or 15 min)
- current difference in time **dI** (5 s, 30 s, 1 min, 5 min or 15 min)
- voltage averaged over time **U_{AV}** (15, 30 or 60 min.)
- current averaged over time **I_{AV}** (15, 30 or 60 min.)
- power averaged over time **P_{AV}** (15, 30 or 60 min.)
- operating/ measurement time **t [s]**
- operating/ measurement time **t [H.M]**
- load capacity **C**
- input energy **E_{p←}**
- output energy **E_{p→}**
- total energy **E_p** (input+output)
- maximum and minimum values

INPUTS AND MEASURING RANGES

Measured value		Nominal range $K_U=1, K_I=100\ 000$	Measuring range (maximum)	Class
Voltages U, dU, UAV	12V	- 4 ... 12 V	-5...15 V	0.2
	48V	- 4 ... 48 V	-10...57.6 V	
	100V	- 5 ... 100 V	-10...120 V	
	250V	- 5 ... 250 V	-10 ... 300V	
	600V*	- 10 ... 500 V	-10...600 V	
	1000V*	- 10 ... 1000 V	-10...1000 V	0.2 + class of additional resistor
Currents (shunt voltage) I, dI, IAV		- 15000 ... 15000 A (- 150 ... 150 mV)	-18000 ... 18000 A (-180 ... 180 mV)	0.2+ shunt class (voltage measurement 0.2)
Time counter t [s] t [H. M]		0...999999999 s 0...277777.5 h.m		1s/ 24h, resolution 1 s
Capacity C		-49 999 999 ... 49 999 999 kWh		±0.5 %
Power P, PAV	12V	-60...180 kW	-75...225 kW	0.4 + shunt class
	48V	-60...720 kW	-150...864 kW	
	100V	-0,075...1,5 MW	-0,15...1,8 MW	
	250V	-0,075...3,75 MW	-0,15...4,5 MW	
	600V*	-0,15...7,5 MW	-0,3...9 MW	
	1000V*	-0,3...15 MW	-0,6...18 MW	0.4 + shunt class + + class of additional resistor
Input energy E_{p←} Output energy E_{p→}		0 ... 99 999 999.9 kWh		±0.5 % + shunt class
Energy sum E_p (input and output)		0 ... 199 999 999.9 kWh		±1 % + shunt class

* - version in set with additional resistor D5 ($K_U \neq 1$),
 K_U - voltage ratio (Pri mar . U / Second. U),
 K_I - current ratio (Shunt I / Shunt mV, $K = 100\ 000$ e.g. for shunt 15 000 A/ 150 mV)
 The maximum range display of measured values on the LCD display are -99999G ... 99999G. These ranges depend upon the size parameters of the primary and secondary voltage divider and the shunt ratio (parameters Pri mar . U, Second. U, Shunt I, Shunt mV).

OUTPUTS

Output type	Properties	Remarks
Analog OUT1, OUT2 (1 or 2 outputs - depends on transducer version)	OUT1 current: 0/4...20 mA, load resistance \leq 500 Ω voltage: 0...10 V, load resistance \geq 500 Ω	accuracy class 0.1
	OUT2 current: 0/4...20 mA, load resistance \leq 250 Ω voltage: 0...10 V, load resistance \geq 500 Ω	accuracy class 0.5
Relay OUT2, OUT3 (1 or 2 outputs - depends on transducer version)	1 or 2 relays; voltageless contacts – NO – maximum load 5A 30V d.c., 250V a.c.	
Additional supplying output OUT3	24 V d.c. / 30 mA (option)	
Interface CAN OUT2	only for transducer version P30H X00XXXXXX	

DIGITAL INTERFACE

Interface type	Properties	Remarks
Ethernet 10/100 Baste-T (option)	Modbus TCP/ IP HTTP, FTP	www, ftp server, client DHCP
RS-485	Modbus RTU: 8N2, 8E1, 8O1, 8N1 Address 1...247	baud rate: 4.8, 9.6, 19.2, 38.4, 57.6, 115.2, 230.4, 256 kbit/s
CAN	Protocol: CANopen	baud rate: 20, 50, 100, 125, 250, 500, 1000 kBit/s

EXTERNAL FEATURES

Overall dimensions	45 x 120 x 100 mm	
Weight	< 0.25 kg	
Protection grade	for housing: IP40/ IP30	for terminals: IP20
Readout field	LCD 2 x 8 characters with LED backlight	


RATED OPERATION CONDITIONS

Supply voltage	• 85...253 V a.c., 85...300 V d.c. • 20...40 V a.c., 20...60 V d.c.	power consumption < 5 VA
Temperature	ambient: -25...23...+55°C	storage: -30...+70°C
Humidity	25...95 %	inadmissible condensation
Working position	any	

SAFETY AND COMPATIBILITY REQUIREMENTS


Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Isolation between circuits	basic / reinforced (see user's manual)	acc. to EN 61010-1
Pollution level	2	
Installation category	III for input voltage up to 300 V d.c., III for input voltage 300...600 V d.c. with additional resistance D5, II for input voltage 600...1000 V d.c. with additional resistance D5	acc. to EN 61010-1
Maximal phase-to-earth voltage	• for supply and input circuits 300 V • for other circuits 50 V	
Altitude above sea level	< 2000 m	

CONNECTION DIAGRAM

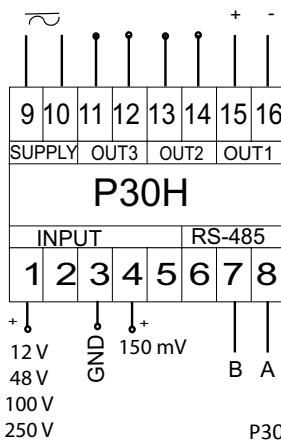


SUPPLY - supply
 OUT2 - output no.2 (alarm. wyj analogowe lub interfejsowe CAN)
 OUT3 - output no.3 (alarm or supplying output 24V)
 OUT1 - main analog output no.1
 INPUT - measuring input
 RS-485 - interface RS-485

P30H-XX11XXXXX



P30H-XX21XXXXX

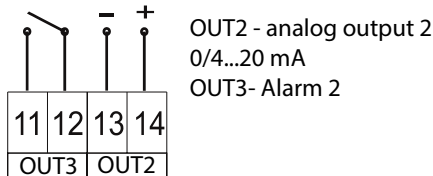

SEE ALSO:



Screen recorder KD8 with touch panel - 3 or 6 channels - RS-485 interface.



Programmable digital meter of temperature, resistance and standard signals N30U.



Software LUMEL - PROCES.

For more information about LUMEL products please visit our website: www.lumel.com.pl

Export department:
 +48 66 45 75 130/ 233/
 321/ 366
 Fax: +48 66 32 54 091
 e-mail: export@lumel.com.pl

LUMEL S.A.
 ul. Sulechowska 1
 65-022 Zielona Góra
 POLAND
WWW.LUMEL.COM.PL

P30H

TRANSDUCER OF D.C. CIRCUITS PARAMETERS WITH DATA RECORD AND ETHERNET

CONNECTION DIAGRAM

SEE ALSO:



Temperature and d.c. standard signals universal digital meter with OLED - N21 type.



Shunts class 0.5




Analog meters

For more information about LUMEL products please visit our website:
www.lumel.com.pl


Export department:
+48 68 45 75 138/ 233/
321/366
Fax: +48 68 32 54 001
e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Sulechowska 1
65-022 Zielona Góra
POLAND
WWW.LUMEL.COM.PL


P30H-XX12XXXXX

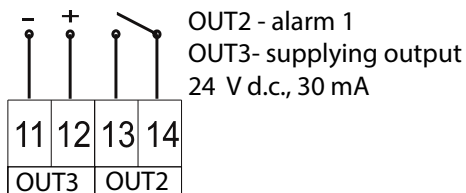


P30H-XX22XXXXX

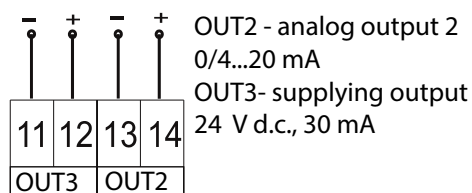


P30H-XX31XXXXX

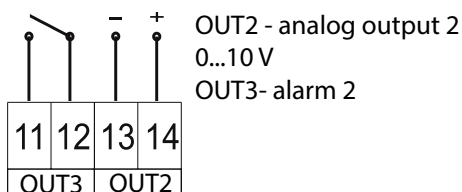



P30H-XX32XXXXX

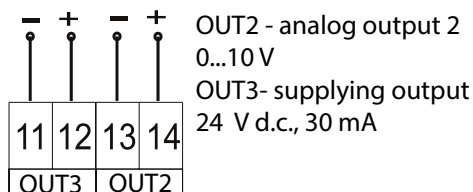

P30H-X001XXXXX

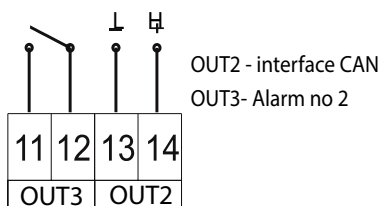

P30H-X002XXXXX

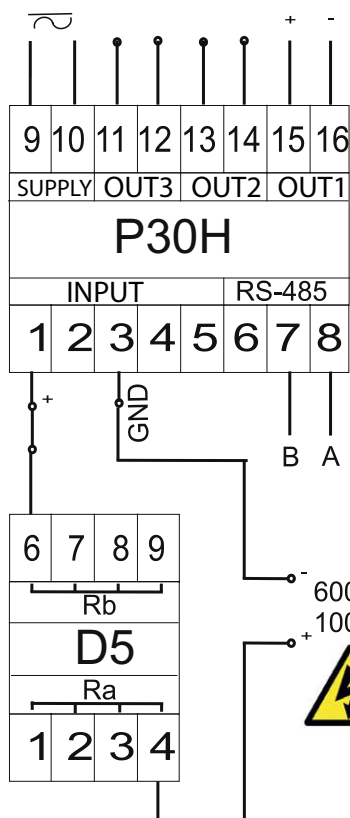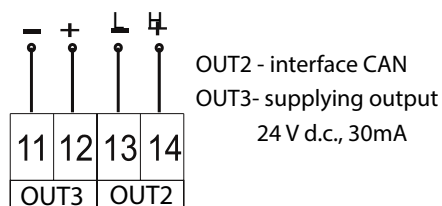

indirect voltage measurement 600 V, 1000 V

ORDERING

Transducer P30H	X	X	X	X	X	XX	X	X
Analog output OUT1:								
current (0/4...20 mA)	1							
voltage (0...10 V)	2							
Additional equipment:								
without	0							
with external SD/SDHC card	1							
with Ethernet interface and archive file system memory	2							
Output OUT2:								
interface CAN with protocol CANopen**	0							
relay A1, 5 A 30 V d.c., 250 V a.c.	1							
analog current output (0/4...20 mA)	2							
analog voltage output (0...10 V)	3							
Output OUT3:								
relay A2, 5 A 30 V d.c., 250 V a.c.	1							
power output 24 V d.c. / 30 mA	2							
Supply:								
85...253 V a.c., 85...300 V d.c.	1							
20...40 V a.c., 20...60 d.c.	2							
Version:								
standard							00	
with CAN interface							03	
custom-made*							XX	
Language:								
Polish								P
English								E
other*								X
Acceptance tests:								
without extra requirements								0
with an extra quality inspection certificate								1
acc. to customer's request*								X

* after agreeing with the manufacturer

** only in version without additional equipment

Order example:

The code **P30H 111210E1** means transducer in standard version with analog current output, with external SD/SDHC card, with relay alarm no.1, with power output 24 V/30mA, with supply 85...235 V a.c./d.c., in English, with an extra quality inspection certificate.

Additional resistance D5	X	X	X
Measuring range in set with P30H:			
600 V	1		
1000 V	2		
Language:			
Polish			P
English			E
other*			X
Acceptance tests:			
without extra requirements			0
with an extra quality inspection certificate			1
acc. to customer's request*			X

* after agreeing with the manufacturer

Order example:

The code **D5 2E1** means additional resistance D5 with measuring range 1000 V, in English, with an extra quality inspection certificate.

SEE ALSO:



Transducer of 1-phase power network parameters - P30P.



3-phase power network meter - ND20.



Current transformers

For more information about LUMEL products please visit our website: www.lumel.com.pl

Export department:
+48 66 45 75 130/ 233/
321/ 366
Fax: +48 66 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Sulechowska 1
65-022 Zielona Góra
POLAND
WWW.LUMEL.COM.PL