



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	22/Oct/09	

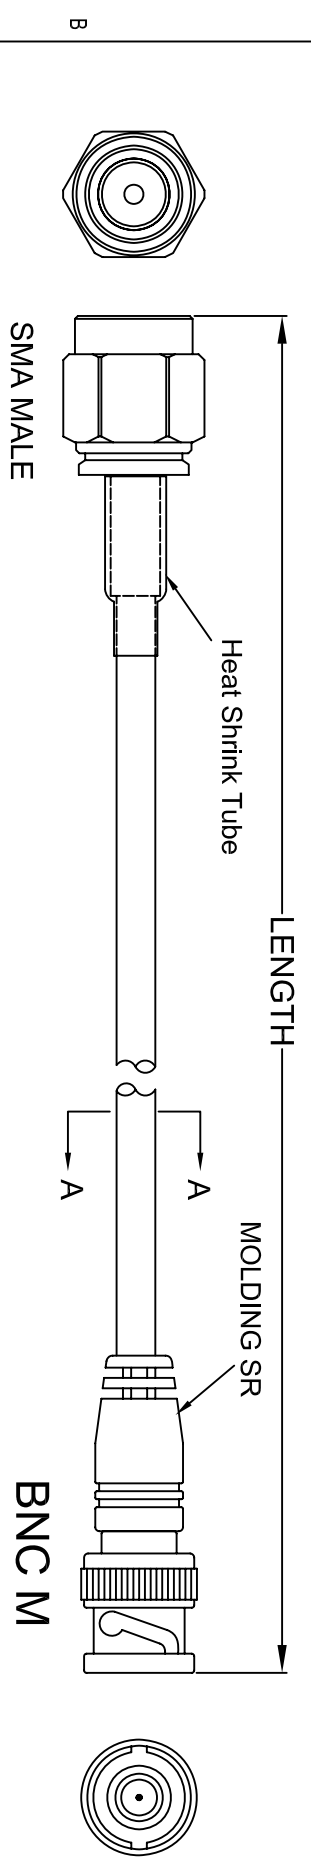


SECTION A-A

LENGTH & P/N Table

LENGTH	CUSTOMER P/N
6 INCH (152±15mm)	CO-174SMAZBNC-000.6
1FT (305±20mm)	CO-174SMAZBNC-001
5FT (1524±30mm)	CO-174SMAZBNC-005
7.5FT (2286±40mm)	CO-174SMAZBNC-007.5
10FT (3048±40mm)	CO-174SMAZBNC-010

- NOTES:
- CABLE: [26AWG(7/0.16±0.008mm)\*1C +BRAID(16\*4/0.12±0.008mm)]TINNEE COPPER  
INSULATION: PE OD= 1.52±0.07mm ;COLOR: TRANSPARENT  
JACKET: HALF MATTE PVC LOW TOXIC; OD=Ø2.54±0.10mm  
COLOR: UL813 BLACK.
  - MARKING: RG-174/U COAXIAL CABLE ROHS
  - CONNECTOR: SMA Male GOLD-PLATING
  - CONNECTOR: BNC Male NICKEL-PLATED
  - OPEN/SHORT MISS WIRE TEST 100%
  - CONDUCTOR RESISTANCE  $\leq 150\Omega/\text{km}$
  - INSULATION RESISTANCE  $\geq 2M\Omega/\text{DC300V } 0.01\text{Sec}$
- ALL MATERIALS SHOULD ACCORD WITH ROHS STANDARD.

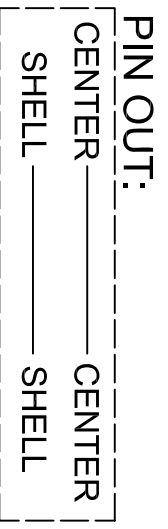

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EQR NO.		Amphenol Cables on Demand	
DECIMALS		DRAWN	DATE	20 VALLEY ST. ENDRICOTT, NY 13760	
X	±.X	LF	22/Oct/09		
.XX	±.XX	CHECKED	BA	22/Oct/09	
.XXX	±.XXX	RESP ENG			
THIRD ANGLE PROJECTION		MFG ENG			
		SIZE	DMG. NO.	CO-174SMAZBNC-XXX	REV. A0
		A			

NOTES: UNLESS OTHERWISE SPECIFIED

A

A