

T	വ	п	m	0



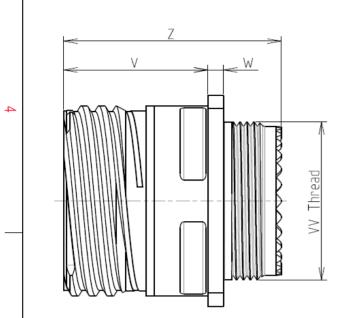

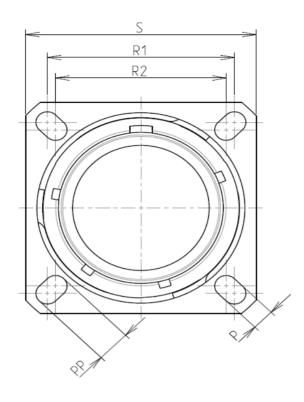

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 09

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 500 hours -Salt Spray

: 23.93 g ± 10%

8D 0

G

09

К

98

Ρ


F

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	5.49±0.2		
R1	18.26		
R2	15.09		
S	23.8±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M12x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

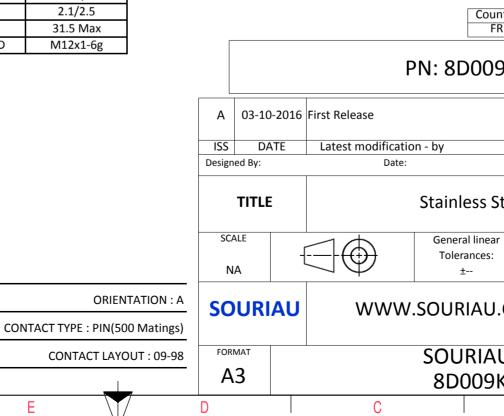

σ		Þ		
			4	
AS EXAMPLE			3	
idation, technica	comply with or by a third party	ist	2	
	CUSTOMER DR	MOD N° AWING		
Steel Recep	tacle 8D series	5		
ar	NPRDS / PRC 859	JECT	1	
J.COM	This document is the property of			
U DRG N K98PA-C	0	SHEET		
B		A	J	
_				

ſ	Ŧ	۵	г П	m	D	0	
		Contact Layout				Ρ	anel Cutou
4	-X				Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Numb conta 9 -98 3	X_avis (mm) Y-axis (mm) +.065 (1.65) +.038 (0.97) +.000 (0.00) 075 (1.91) 065 (1.65) +.038 (0.97) er of Size contacts rating location Supersedes				ØA	ØT_
ω						Dim ØA ØAA R1 ØT	
	_				[
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts wh by either of
N						PN: 8	Countr FR D009k
					A 03-10-20	016 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	Stain	less Ste
_					SCALE NA		eral linear erances: ±
					SOURIA	U WWW.SOUI	RIAU.C
					FORMAT A3		JRIAU 009K9
	Н	G	F	E	D	C	

