


NOTE:
 1. Transmission speed: 10Gbps
 2. Conductive resistance: 3Ω Max
 3. Insulation resistance: 5MΩ Min/300VDC, 10ms
 4. 100% open, short, miswire test.

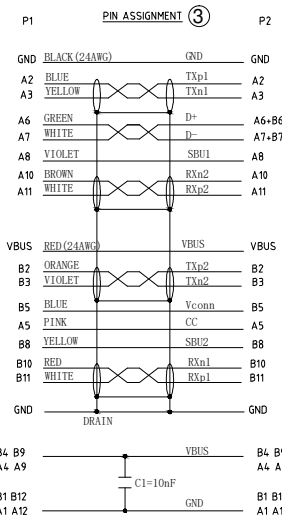

⑥	Shell	Type-C shell, gray, Aluminium alloy, printed USB 10G logo ②	2	PCS
⑤	Over mold	PVC 45P BLACK	NA	G
④	Inner mold	LD-PE	NA	G
③	CONN	Type-C female, contact GF, shell Ni plated, BK insulator	1	PCS
②	CONN	Type-C male, contact GF, shell Ni plated, BK insulator	1	PCS
①	CABLE	USB3.1 Type C cable (32AWG*1P+D+AL/MY)*4C+32AWG*1P+32AWG*4C +24AWG*2C+D+AB, OD:4.5MM, Black PVC ②	1	PCS
NO.	NAME	DESCRIPTION	Q'TY	UNIT

RoHS compliant
Unit: mm

Scale	Free	TOLERANCE	③	Update pin assignment	19.07.2023	Luca	Approved	19.07.2023	Luca	Customer-No.	
										ASSMANN WSW-No. A-USB32C-32C-050-2	
DIM	TOL	①	②	Update specification	07.06.2023	Luca				Drawing-No.	
										ASS 10358 CA rev03	
Angle	TOL	①	④	Update PN	24.04.2023	Daniel				Replace	Sheet 1 / 1
Id.	Modification	Date	Name								