

# Type BLR-I-306-G

## Fuse Block - Indicating

### 6 Pole – Regular Auto Blade

### With 8 Position Grounding Block



www.optifuse.com

(619) 593-5050

#### Specifications:

**Max Voltage:** 32VDC

**Max Current Rating:** 30A per Circuit - 100A Max Input

**Fuse Type:** Regular Auto Blade – APR, APN Series

**Base:** PBT

**Cover:** PC (Transparent)

**Indicating LED – Red**


**Load-side Connection:** 0.250" Quick Connect Terminals - Copper, Tin plated

**Line-side Connection:** 2 each, M5 (SUS304) stud terminal with 2 hex nuts, flat washer, lock-washer

**Mounting:** 4 mounting holes for #10 screws (not provided)

**Temperature Rating:** -20° C ~ +85° C

#### Mechanical Dimensions: Inches [mm]

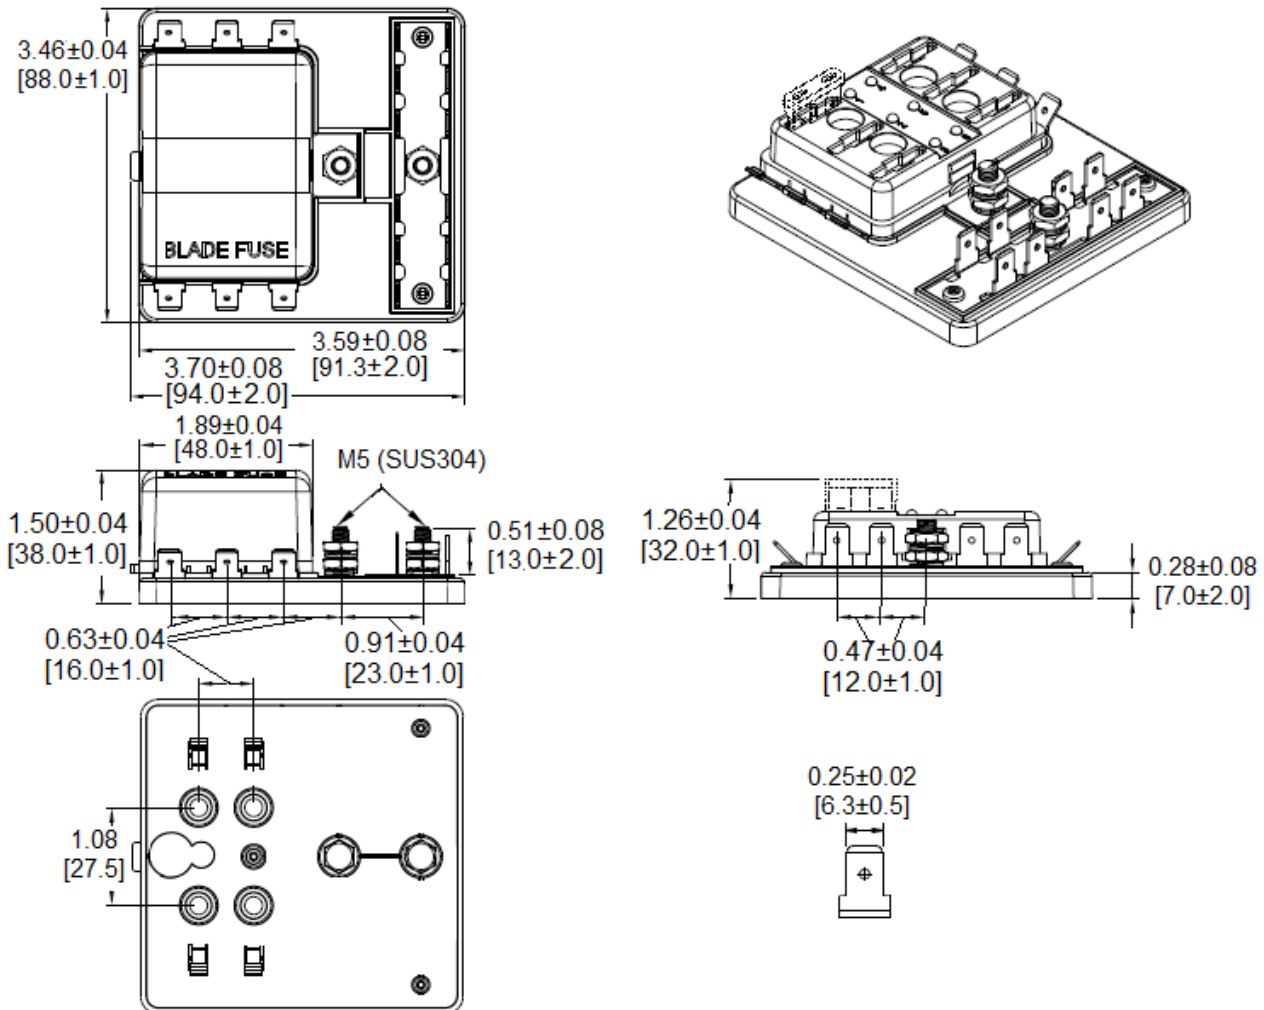

	<p><b>Warning:</b> -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.</p>
	<p>-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.</p>

Note: All specifications subject to change without notice.

Rev A 04/2018 - Page: 1/1  
Code S02-01H