
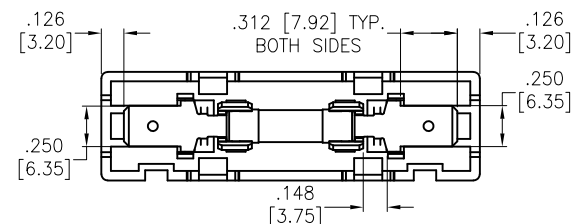

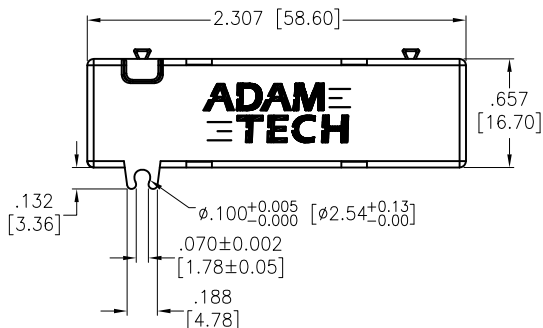

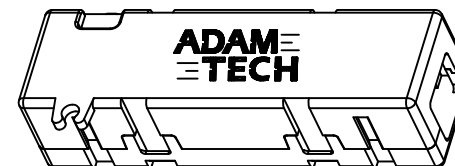


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description  | Date    | Appr  |
|-----|-------|--------------|---------|-------|
| -   |       | RELEASED     | 1/18/19 |       |
| A   |       | UPDATED DRWN | 3/11/19 | AY/TW |



Bottom Cover and Terminal

FH-A-A01  
(1) (2) (3)(4)

- (1). SERIES NO.  
(2). TYPE  
(3). CONTACT TYPE  
A=.250" [6.35mm]  
(4). FUSE TYPE  
01=5x20

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL94V-0

Insulator color: Black (Top and Bottom)

Contact: Phosphor Bronze, Tin plated

Fuse: 5x20mm, 250V, 6 Amp

Temperature Rating:

Operating temperature: -20°C to +70°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES HOLES  
.X ±.10 Ø.X ±.10  
.XX ±.020 Ø.XX ±.015  
.XXX ±.015 Ø.XXX ±.010

| APPROVALS |    | DATE    |
|-----------|----|---------|
| DRAWN     | AY | 1/18/19 |
| CHECKED   | TW | 1/18/19 |
| APPROVED  |    |         |

**ADAM  
TECH**  
INTERCONNECTS

909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE  
FUSE HOLDER, .250" QD  
5X20 FUSE, 250V 6 Amp

| SIZE         | PART NO.  | REV.       |
|--------------|-----------|------------|
| X            | FH-A-A01C | -          |
| REF:         | S00181C   | SCALE: NTS |
| SHEET 1 OF 1 |           |            |