


P/N: 10160920-124XXXXLF

MARK "H+" STAND FOR HIGH CURRENT

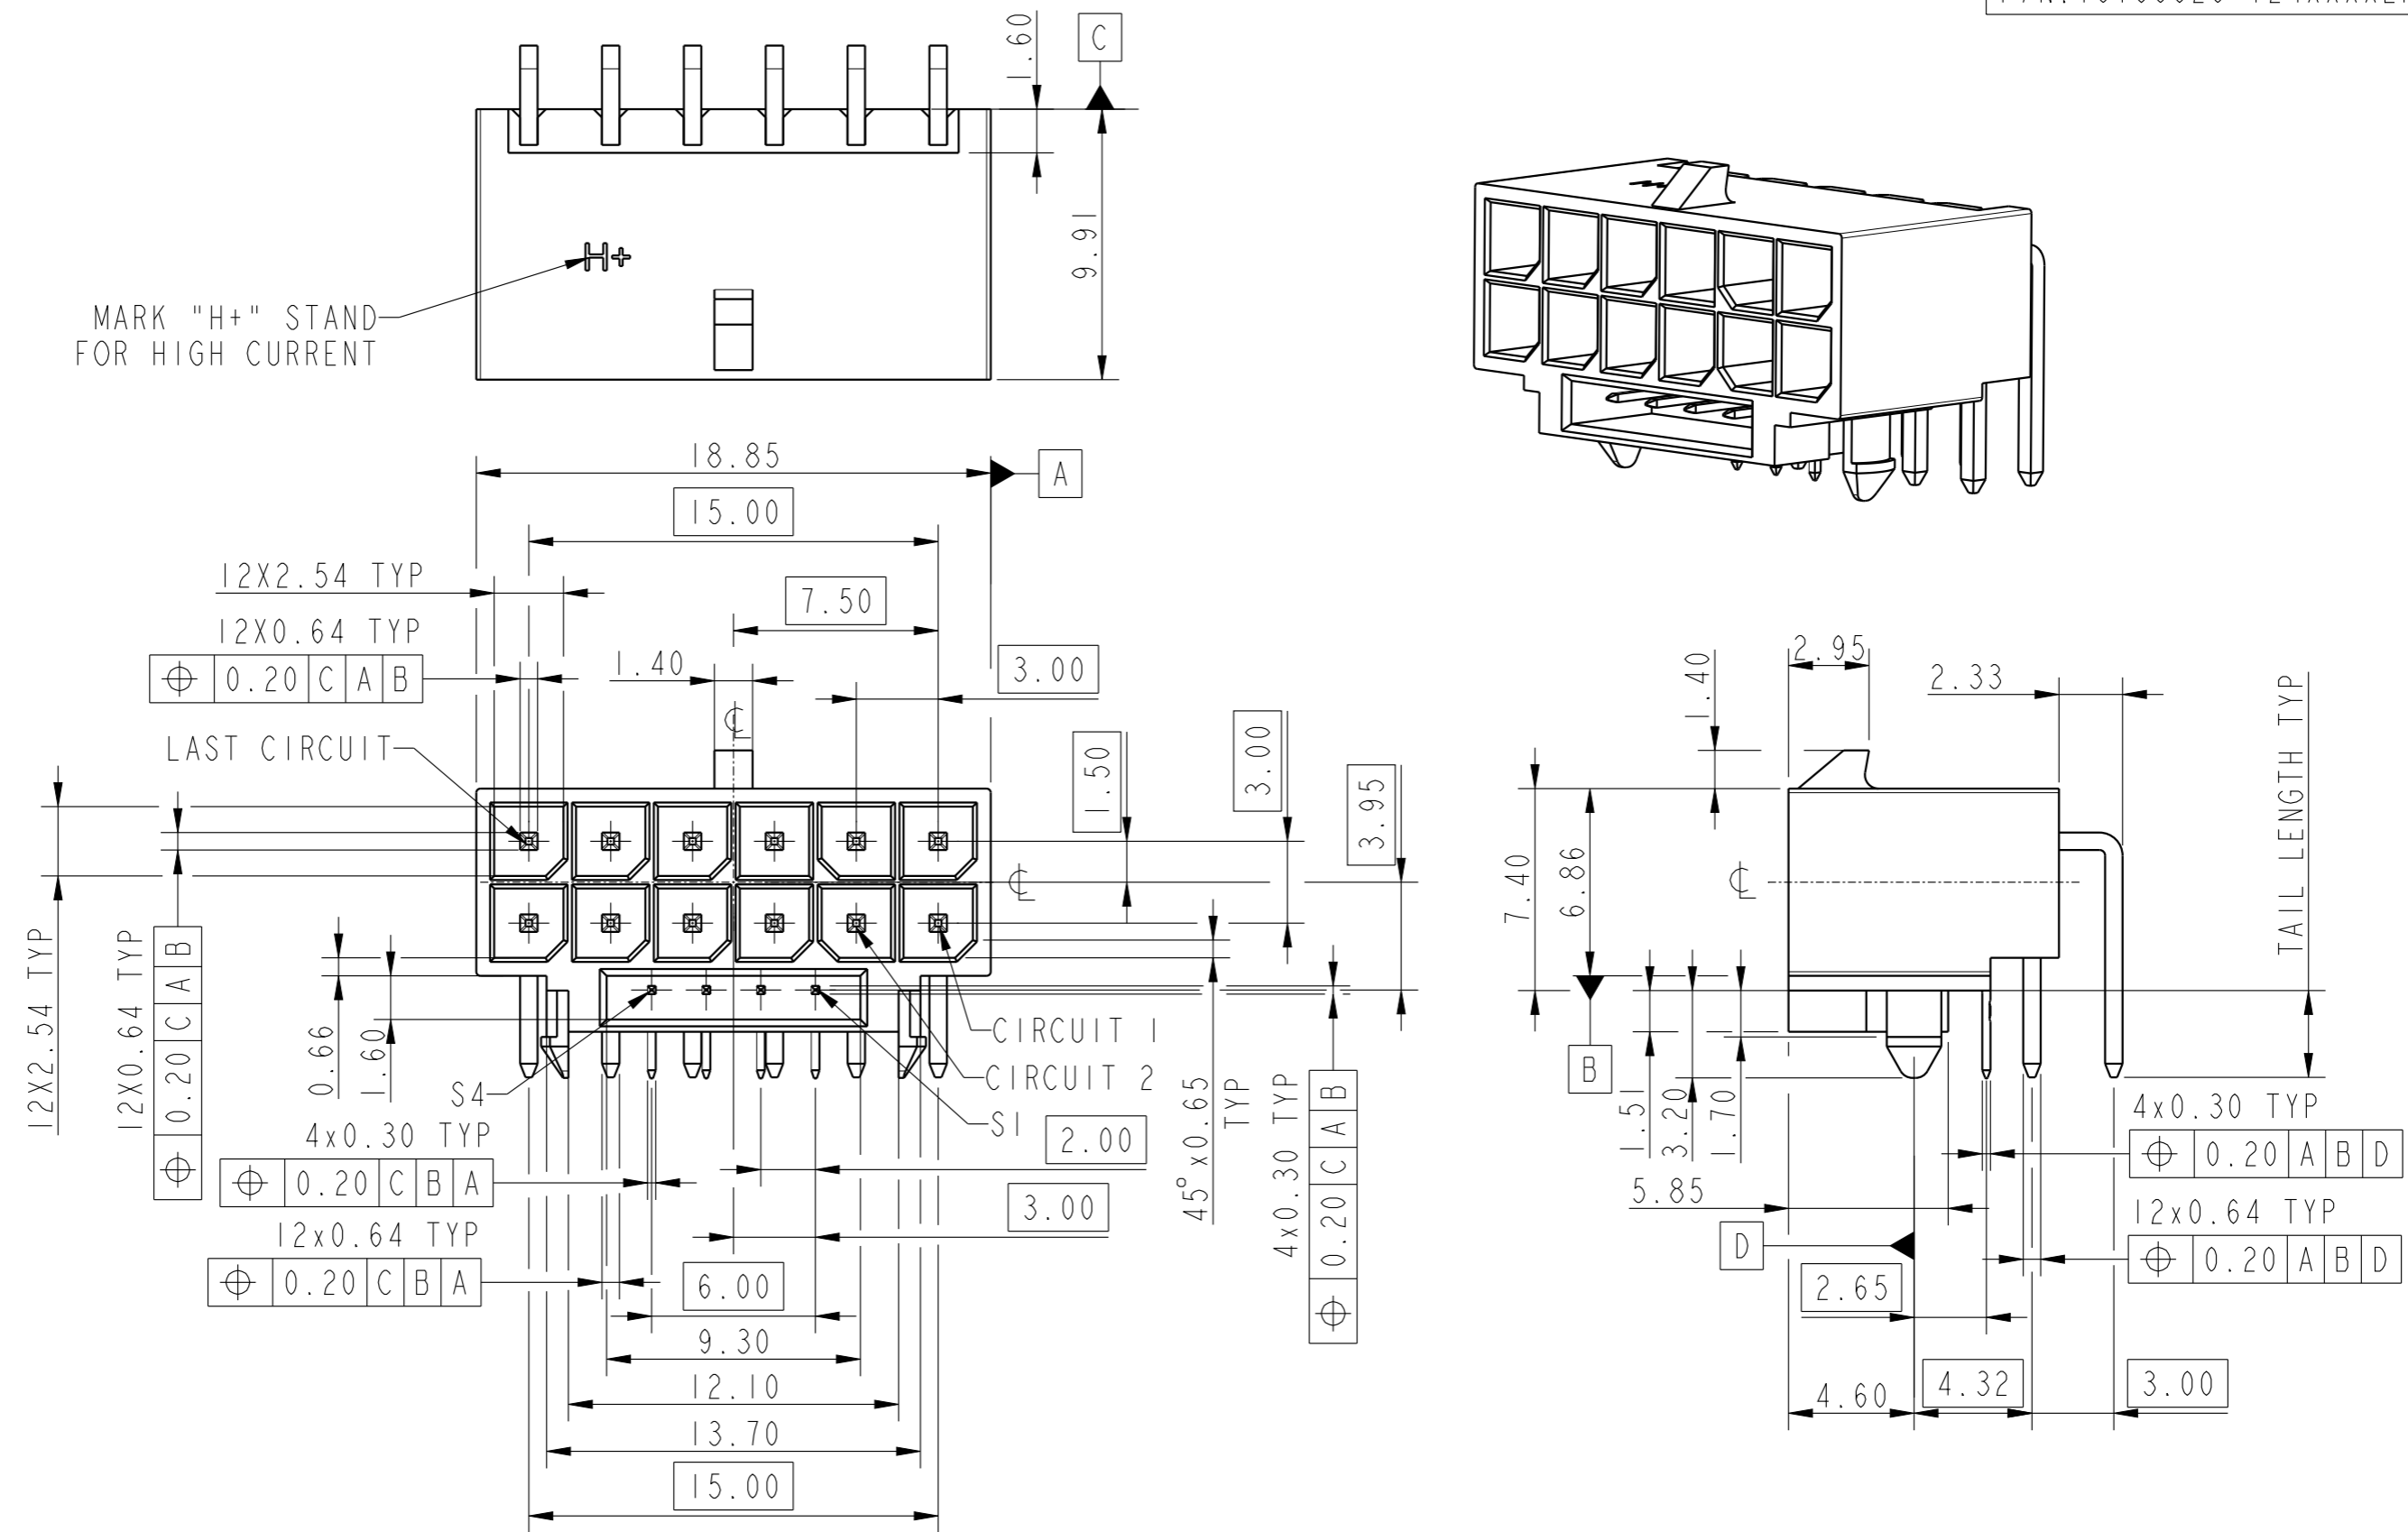


Amphenol
FCi

© 2020 Amphenol Corporation

spec ref	dr	Akhil Rajan	2021/06/28	projection	MM	size	A3	scale	4:1
tolerance std	eng	Paul Mithun	2023/02/07			ecn no	ELX-I-45069-1		
ISO 406 ISO 1101	chr	-	-			rel level	Released		
TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Paul Mithun	2023/02/07	product family	Minitek Power		rel level	Released	
surface	linear	0.X	±0.25		title HYBRID R/A HEADER Minitek PWR CEM-5 12VHPWR cat. no. -	dwg no 10160920	rev D	Product - Customer Drw	
ISO 1302	angular	0°	±2°					sheet 1 of 2	

Creo File:ELX-WC-A3C.REV F.2020-12-21

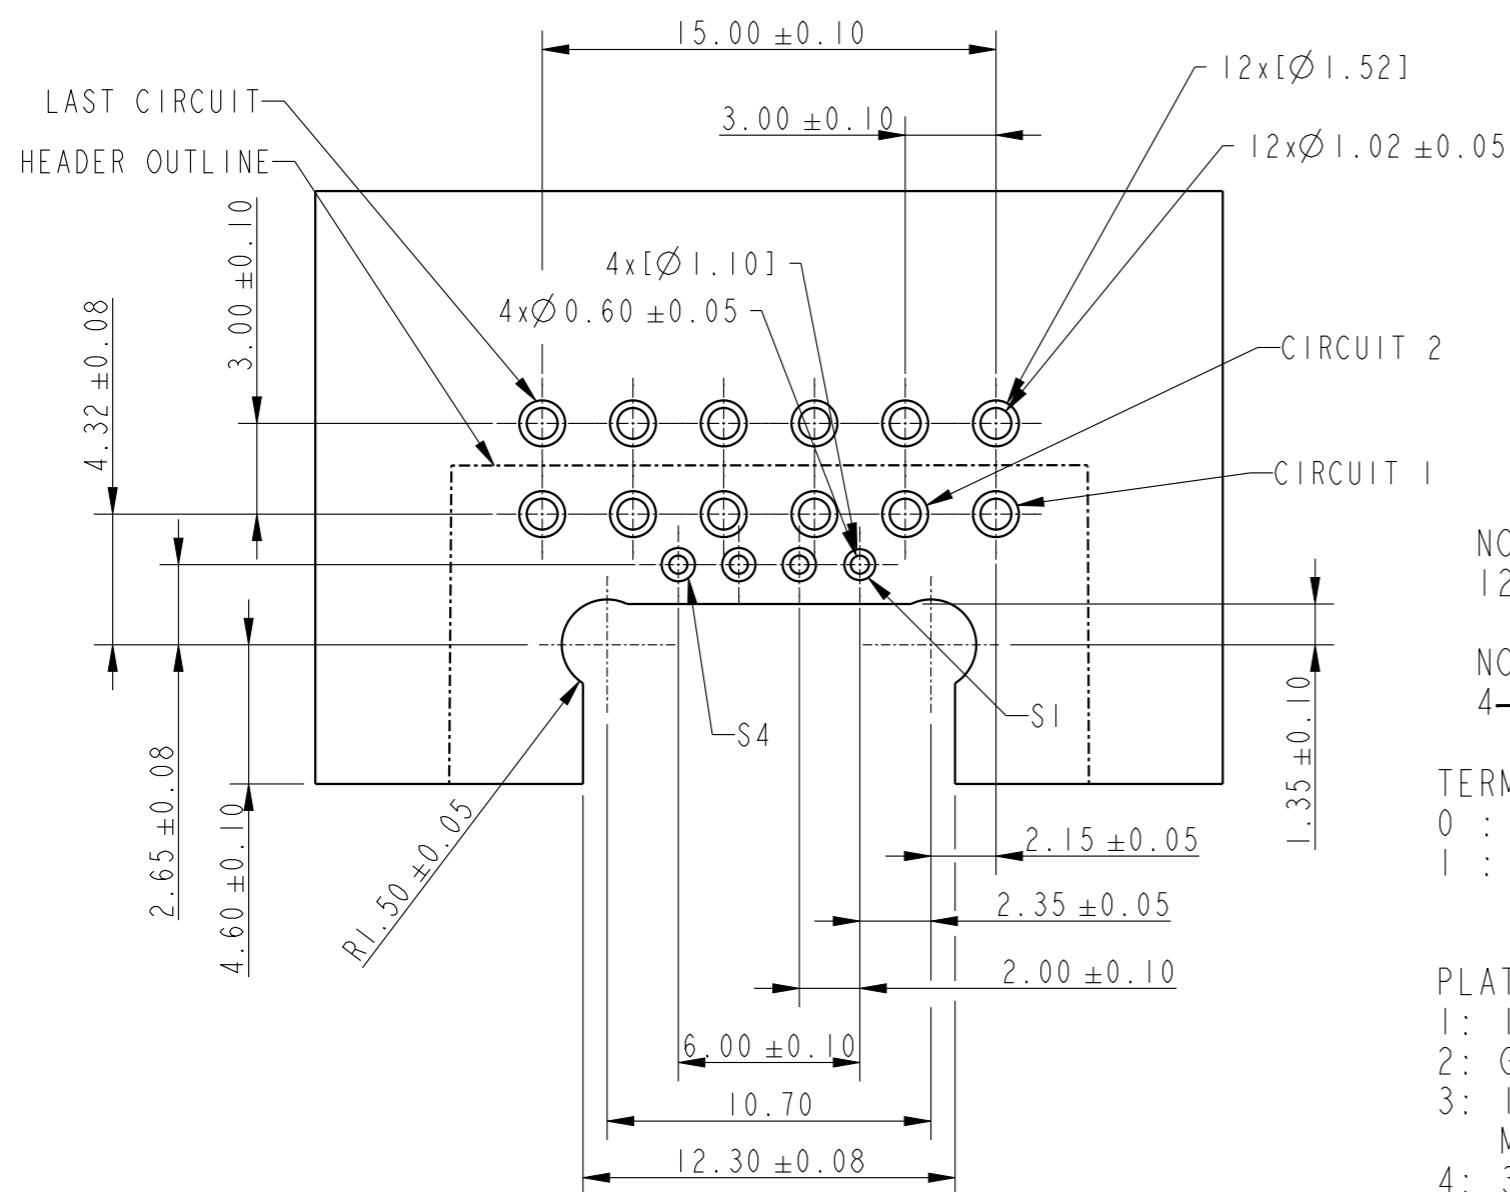

RECOMMENDED PCB LAYOUT, PCB THICKNESS: 1.57MM
UNSPECIFIED TOLERANCE ±0.05MM

1. MATERIAL:
HOUSING: HIGH TEMP. THERMOPLASTIC, LCP
UL94V-0, COLOUR: BLACK, GLOW WIRE COMPATIBLE
CONTACT: COPPER ALLOY.
2. CONTACT FINISH: 50µ" MIN NICKEL UNDERPLATED.
OPTIONAL PLATING ON CONTACT AREA.
PLATING: SEE PART NO LOGIC
3. MATE WITH AICC RECEPTACLE: 10161719, 10168565
4. PRODUCT SPECIFICATION: GS-12-1706
5. PACKING SPECIFICATION: GS-14-2802
6. APPLICATION SPECIFICATION: GS-20-0704
7. IN ACCORDANCE WITH PCIE SPECIFICATION REV 5
8. PART NUMBER LOGIC

10160920-XX X X X X X LF

NO. OF POWER PINS LOADED _____
12 → 12 PINS

NO. OF SIGNAL PINS LOADED _____
4 → 4 PINS

TERMINATION LENGTH: _____
0 : 3.18MM
1 : 2.20MM

PLATING OPTION: _____
1: 100µ" MATTE TIN OVERALL
2: GOLD FLASH OVERALL
3: 15µ" GOLD ON CONTACT AREA AND
MATTE TIN AT TERMINAL AREA
4: 30µ" GOLD ON CONTACT AREA AND
MATTE TIN AT TERMINAL AREA

PACKING OPTION: _____
0 : TRAY
1 : TAPE AND REEL

LOADING OPTION: _____
0: STANDARD

spec ref		dr	Akhil Rajan	2021/06/28	projection	MM	size	A3	scale	4:1		
tolerance std		eng	Paul Mithun	2023/02/07			ecn no		ELX-I-45069-1			
ISO 406 ISO 1101		chr	-	-			rel level		Released			
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	Paul Mithun	2023/02/07	product family		Minitek Power		rel level			
surface	linear	0.X		±0.25		HYBRID R/A HEADER		dwg no	10160920		rev	D
		0.XX		±0.20		Minitek PWR CEM-5 12VHPWR						
ISO 1302		angular	0°			±2°	cat. no.		-		Product - Customer Drw	

Creo File: ELX-WC-A3C, REV F, 2020-12-21