


FEMALE - FEMALE ADAPTOR

CAPTIVE CONTACT .

SERIES: N 18 GHz

1 / 1

DEP90.R161.500

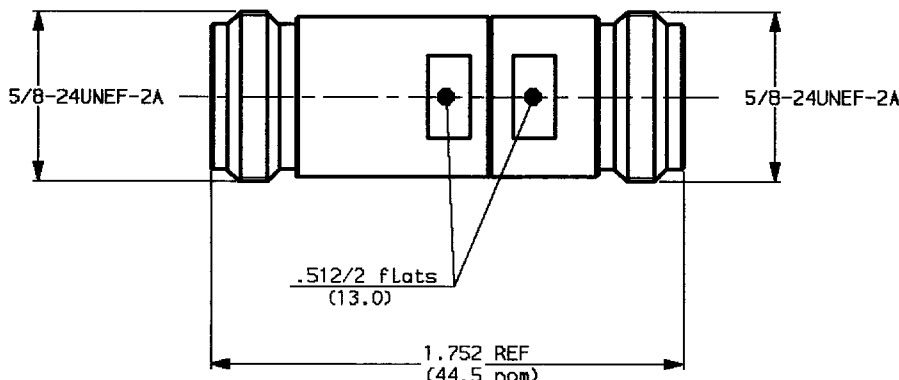

WEIGHT oz (g)

CHARACTERISTICS

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-18	GHz
TEMPERATURE RATING	-65/+165	°C
VSWR	1.05 + 0.005 f(GHz)	
RF INSERTION LOSS	0.1	dB Maxi
VOLTAGE RATING	1000	Vrms Maxi
DIELECTRIC WITHSTANDING VOLTAGE	2500	Vrms mini
INSULATION RESISTANCE	5000	MΩ mini
HERMETIC SEAL	NA	cc/s Atm.cm3/s
LEAKAGE	0.641 .0044	psi MPa
(Low atmospheric air pressure)	-	-

STANDARDISATION	MIL C 39012
	CECC 22000
	IEC 189-1B
DS 8811 - Aeronautic applications	

CABLE RETENTION

NA

Lb mini

N

CENTER CONTACT RETENTION	
Axial force - mating end	6.075 ₂₇ Lb mini
Axial force - opposite end	6.075 ₂₇ Lb mini
Torque (Min)	NA Inch.oz cm.N

RECOMMENDED TORQUES	
Mating	NA Inch.Lb cm.N
Panel nut	NA Inch.Lb cm.N
Clamp nut	NA Inch.Lb cm.N

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	STAINLESS STEEL	PASSIVATED
OUTER CONTACT	STAINLESS STEEL	PASSIVATED
CENTER CONTACT	BERYLLIUM COPPER	GOLD
INSULATOR	POLYETHERIMID RESIN	-
INSULATOR	PTFE	-
GASKET	FLUOROSILICON	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.

Initiated on 09-JUL-90

The information given here
is subject to change without
notice. Design changes may be
in order to improve the product.



Superseded on