
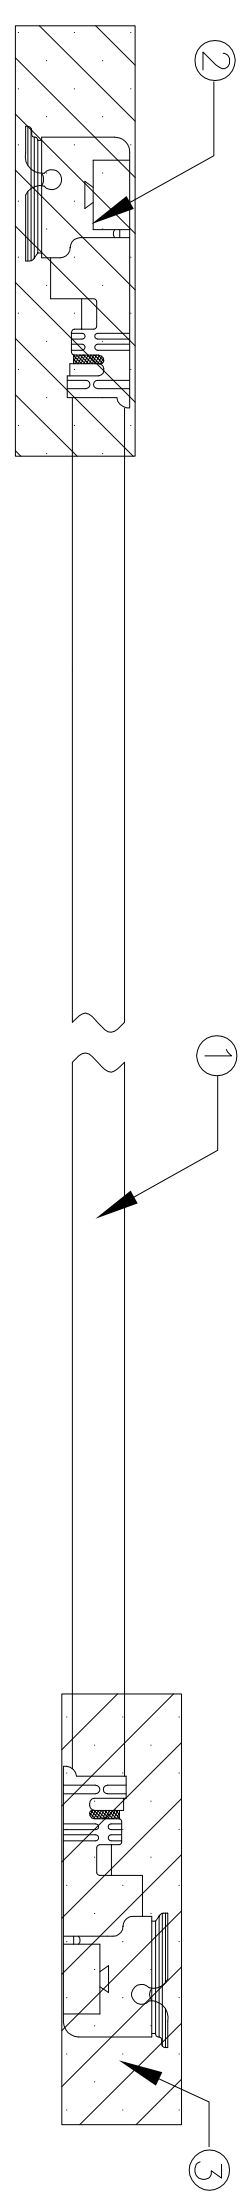


Loc	DIST	REVISONS	
GP	00	P	LTR
		A	NEW RELEASE
		12FEB09	CP LZ

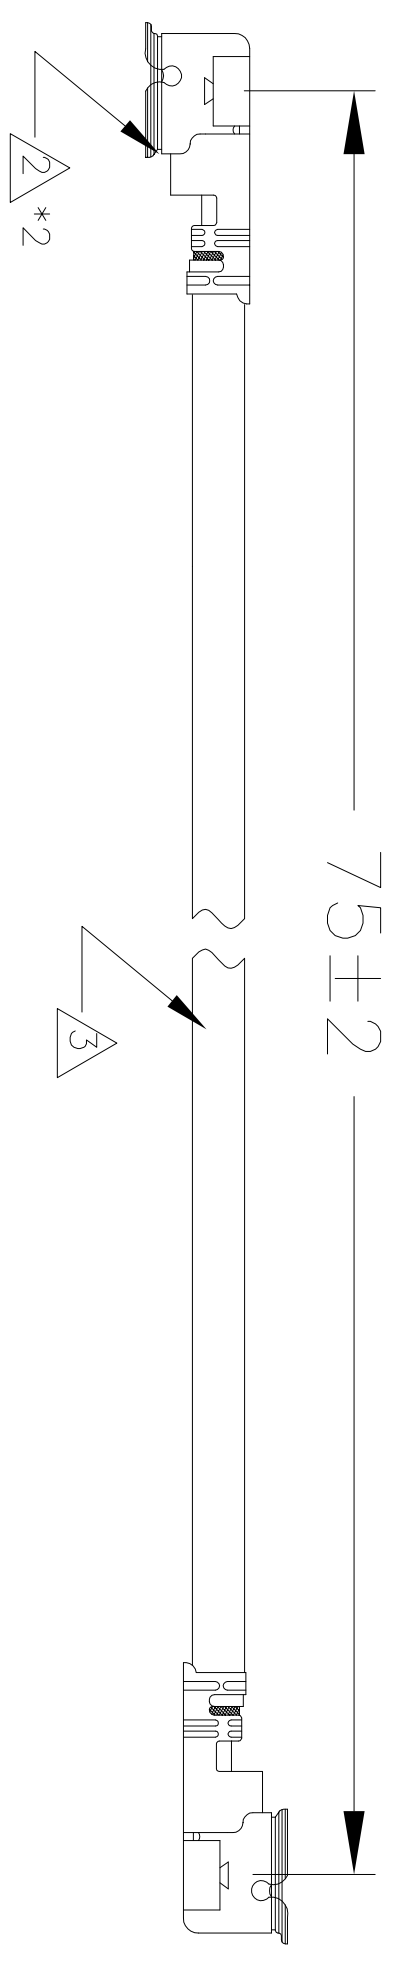

- NOTES:
- CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY
 HI-POT: 200 VDC FOR 100MS
 INSULATION RESISTANCE: 50M OHMS MIN
 CONTINUITY RESISTANCE: 2 OHMS MAX
 FREQUENCY RANGE: DC TO 6 GHZ
 VSWR: 1.5:1 MAX
 - CONNECTOR: TYPE III U.FL
 SUPPLIER: I-PEX 20278-112R-13
 - CABLE: 1.13MM OD, JACKET WHITE, 50 OHMS FEP INSULATED
 SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
 - TWO END U.FL CONNECTORS IN 180 DEGREE DIFFERENCE POSITION
 - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF
 TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	12FEB09	Chen Ping
CHK	12FEB09	Andrew Dong
APVD	12FEB09	Lucky Zhang
Product spec		
APPLICATION SPEC		
WEIGHT		

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm [INCHES]	0 PLC ±.1
	1 PLC ±.1
	2 PLC ±.1
	3 PLC ±.1
	4 PLC ±.1
	FINISH ±.1

30	MM	PROTECT TUBING FOR I-PEX 20278	3
2	PC	I-PEX 20278-112R-13 CONNECTOR	2
75	MM	COAXIAL CABLE, WHITE, OD 1.13MM	1
-1	U/M	DESCRIPTION	ITEM

Tyco Electronics Corporation
 Harrisburg, PA 17105-3608

FWTS Ericsson UMTS/Aux cable assembly
 White, 75mm, 180degree

SIZE: A3
 CAGE CODE: 00779
 DRAWING NO: G=1513287

SCALE: N.T.S.
 SHEET: 1 OF 1
 REV: A