

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: FT2

Conductor

Conductor count: 5
 Gauge: 28 AWG 0.09 mm²
 Material: tinned copper strands
 Strand size: $\phi 0.127 \times 7$
 Resistance at 20 °C: 250 Ω /km max

Insulator

Material: mPPE
 Color: red, black, white, yellow, blue
 Diameter: $\phi 0.9 \pm 0.08$ mm
 Average thickness: 0.25 mm
 Resistance at 20 °C: 100 M Ω /km min

Filler

Material: cotton rope

Wrap

Material: cotton paper



Outer jacket

Material: mPPE, 85A
 Color: black
 Diameter: $\phi 4.1 \pm 0.15$ mm
 Average thickness: 0.79 mm

Wire marking: E339579 UL AWM STYLE 21509 28 AWG 105°C
 600V --- cUL AWM I A 105°C 600V FT2 TENSILITY

Bend radius

Minimum: 6 times diameter (24.6 mm)

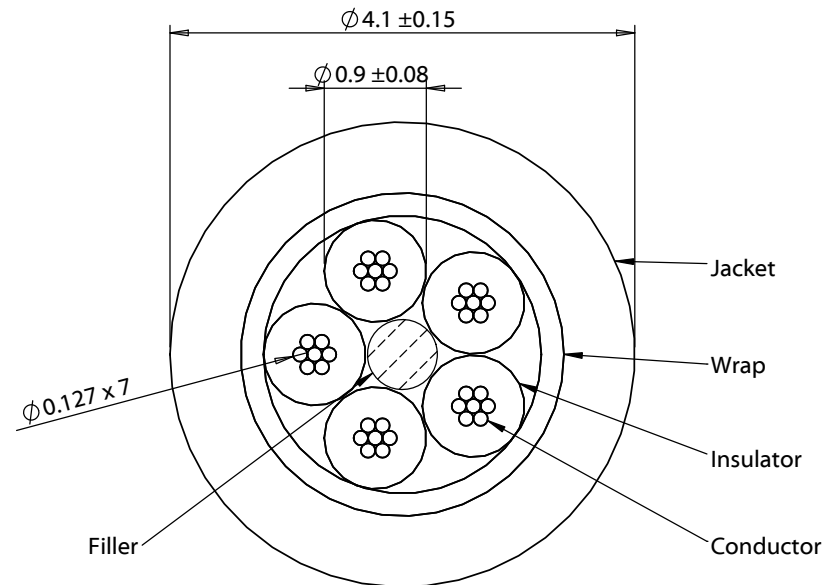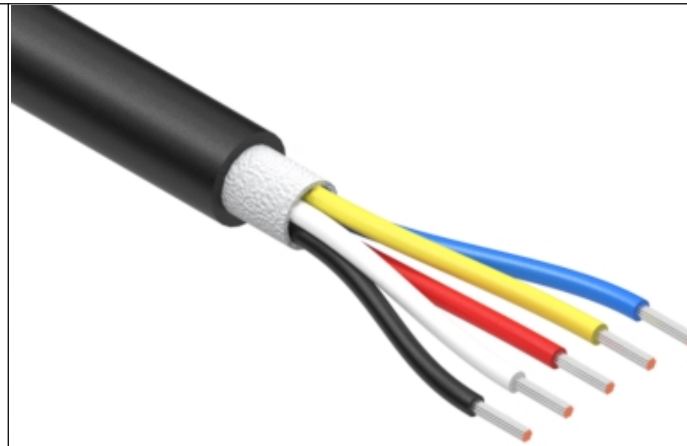

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	5/5/2021	Initial release	AW <small>Digitally signed by AW Date: 2021.05.19 09:44:04 -07'00'</small>		
			Verified:	Phthalate and halogen free	Size:
			JC <small>Digitally signed by JC Date: 2021.05.19 12:01:43 -07'00'</small>	Description:	A
			Dimensions are in millimeters.	Wire, 5C TS, 28 AWG, 21509, 600V, 105C, 4.1 mm, FT2, mPPE	Part number:
			Tolerances:		30-02003
			X: ± 0.5 mm		Scale: 15:1
			X.X: ± 0.3 mm		
			X.XX: ± 0.05 mm		Sheet 1 of 1

5

4

3

2

1