

## RQY-PA



Aerosusa.com  
service@aerosusa.com  
855.393.9905

Plastic connector quick-type, Y distributor for rational tubing assembly by just putting on, high density

Material: PA plastics

Temperature:

-40°C ... +120°C

-40°F ... +248°F

Protection Class: IP 68 | IP 69K

Color: Grey, Black

Properties:

Rational tubing assembly due to one-piece screw connector with push-in lock for coarse and fine profile conduits

Simple dismounting by displacing the snap-in sleeve

Smallest outer dimensions to be used under confined conditions


Free of silicone, cadmium and halogen

Self-extinguishing

Fit for high mechanical stress

Impact-resistant

### CERTIFICATIONS

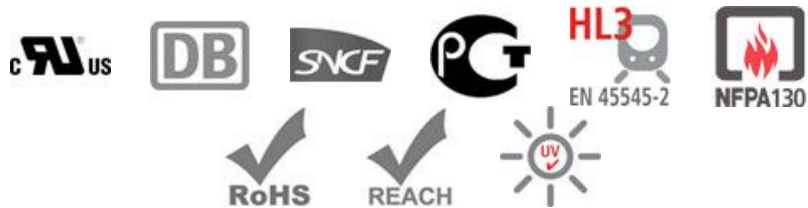

*"Unsurpassed in Cable Protection and Strain Relief"*

2409 Herr St.  
Harrisburg, PA 17103



Aerosusa.com  
service@aerosusa.com  
855.393.9905

## Technical Data Sheet

Product #	AD	B1 (in)	B2 (in)	C (in)	D (in)	E (in)	F (in)	Ib/100	Color	PU
5020.032.201	OD1 - 13.0 / OD2 - 2 x 10.0	0.79	0.67	1.42	2.72	0.93	0.22	3.5274	Black	10 PC
5020.032.202	OD1 - 13.0 / OD2 - 2 x 13.0	0.79	0.79	1.65	2.78	0.93	0.22	3.9683	Black	10 PC
5020.032.203	OD1 - 15.8 / OD2 - 2 x 13.0	0.91	0.79	1.65	2.83	1.14	0.22	4.4092	Black	10 PC
5020.032.204	OD1 - 15.8 / OD2 - 2 x 15.8	0.91	0.91	1.89	3.19	1.14	0.22	4.8502	Black	10 PC
5020.032.206	OD1 - 21.2 / OD2 - 2 x 15.8	1.16	0.91	1.93	3.44	1.06	0.22	7.2752	Black	10 PC
5020.032.208	OD1 - 28.5 / OD2 - 2 x 21.2	1.46	1.16	2.46	4.04	1.46	0.26	12.1254	Black	10 PC
5020.032.209	OD1 - 34.5 / OD2 - 2 x 28.5	1.73	1.46	3.05	4.17	1.69	0.26	16.9756	Black	10 PC
5020.032.210	OD1 - 42.5 / OD2 - 2 x 34.5	2.05	1.73	3.86	4.92	1.77	0.26	25.7941	Black	10 PC
5020.032.211	OD1 - 54.5 / OD2 - 2 x 42.5	2.52	2.05	4.33	5.1	2.44	0.26	34.1716	Black	5 PC
5020.032.001	OD1 - 13.0 / OD2 - 2 x 10.0	0.79	0.67	1.42	2.72	0.93	0.22	3.5274	Grey	10 PC
5020.032.002	OD1 - 13.0 / OD2 - 2 x 13.0	0.79	0.79	1.65	2.78	0.93	0.22	3.9683	Grey	10 PC
5020.032.003	OD1 - 15.8 / OD2 - 2 x 13.0	0.91	0.79	1.65	2.83	1.14	0.22	4.4092	Grey	10 PC
5020.032.004	OD1 - 15.8 / OD2 - 2 x 15.8	0.91	0.91	1.89	3.19	1.14	0.22	4.8502	Grey	10 PC
5020.032.006	OD1 - 21.2 / OD2 - 2 x 15.8	1.16	0.91	2	3.44	1.06	0.22	7.2752	Grey	10 PC
5020.032.008	OD1 - 28.5 / OD2 - 2 x 21.2	1.46	1.16	2.46	4.04	1.46	0.26	12.1254	Grey	10 PC
5020.032.009	OD1 - 34.5 / OD2 - 2 x 28.5	1.73	1.46	3.05	4.17	1.69	0.26	16.9756	Grey	10 PC
5020.032.010	OD1 - 42.5 / OD2 - 2 x 34.5	2.05	1.73	3.86	4.92	1.77	0.26	25.7941	Grey	10 PC
5020.032.011	OD1 - 54.5 / OD2 - 2 x 42.5	2.52	2.05	4.33	5.1	2.44	0.26	34.1716	Grey	5 PC

*"Unsurpassed in Cable Protection and Strain Relief"*

2409 Herr St.  
Harrisburg, PA 17103