


- 1. NO DISLODGMENT OF THE CELL OR DAMAGE TO RETAINER WITH THE FOLLOWING TESTS:
  - a) INTEGRITY VIBRATION TEST PER MIL-STD-810G METHOD 516.6
  - b) SHOCK TEST PER MIL-STD-810G METHOD 516.6
  - c) BENCH HANDLING SHOCK TEST PER MIL-STD 810G METHOD 516.6
  - d) TRANSIT DROP TEST PER MIL-STD 810G METHOD 516.6
- 2. TAPE AND REEL SPECIFICATIONS:
  - a) TAPE:

b) REEL:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER ANSI/EIA-481 STANDARD

13.0 [330.2] DIA. 500 PIECES OF PART NO. 2898 PER REEL. 3.30.20 ECN 20-032 ADD NOTE 1. DATE **DESCRIPTION** REV.

## KEYSTONE ELECTRONICS CORP. www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500 PART NAME CR2032 COIN CELL CLIP ON TAPE MATERIAL AS NOTED DRN BY FINISH DATE 9.19.18 AS NOTED APP'D RH INCH [MM] TOLERANCES CODE DWG NO. $\pm .015 [\pm 0.38]$ DECIMAL 2898TR C ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED

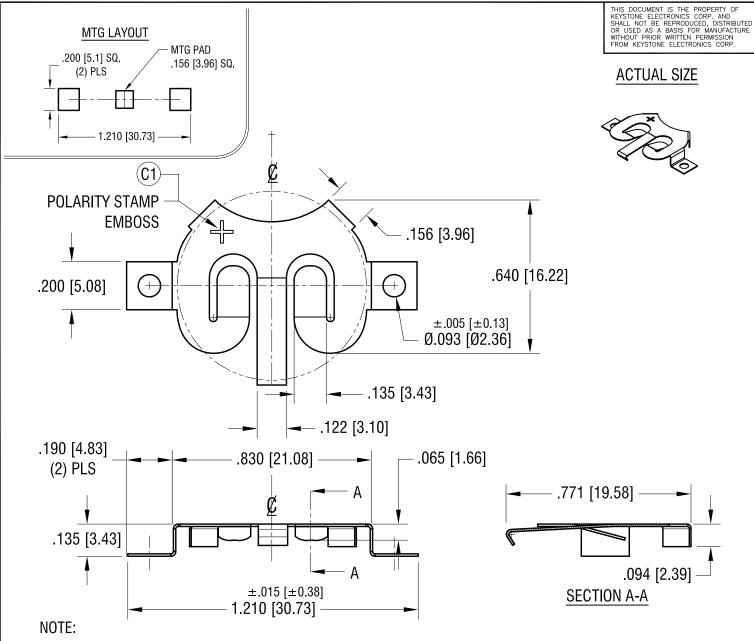

- 1. NO DISLODGMENT OF THE CELL OR DAMAGE TO RETAINER WITH THE FOLLOWING TESTS:
  - a) INTEGRITY VIBRATION TEST PER MIL-STD-810G METHOD 516.6
  - b) SHOCK TEST PET MIL-STD-810G METHOD 516.6
  - c) BENCH HANDLING SHOCK TEST PER MIL-STD 810G METHOD 516.6
  - d) TRANSIT DROP TEST PER MIL-STD 810G METHOD 516.6

			www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500
1.11.23	STAMP C1) WAS CUT THRU CHANGE AS PER ECN 23-026	С	PART NAME 2032 COIN CELL SM RETAINER MATERIAL
3.30.20	ADDED NOTE 1. CHANGE AS PER ECN 20-031	В	.010 [0.25] TH'K PHOSPHOR BRONZE  FINISH DRN BY NT DATE 9 19 18
5.13.19	REMOVE DIMPLES CHANGE AS PER ECN 19-053	А	TIN NICKEL PLATE APP'D SCALE 2.5X  TOLERANCES INCH [MM] CODE DWG NO.  DECIMAL ± .010 [± 0.25 ]
DATE	DESCRIPTION	REV.	ANGULAR ± 1° C 2898

KEVSTONE ELECTRONICS CORP