


Material: UL94 V-2 Nylon 6/6

Color: Natural

Part No.	A	
	mm	in
CBLS305A	3.2	.126
CBLS310A	4.8	.189
CBLS315A	6.4	.252
CBLS320A	7.9	.311
CBLS325A	9.5	.374
CBLS330A	11.1	.437
CBLS335A	12.7	.500
CBLS340A	14.3	.563
CBLS345A	15.9	.626
CBLS350A	19	.748

TO SNAP LOCK IN A 3 (.118) Ø HOLE, IN A  
1.2 - 1.7 (.047 - .067) PANEL THICKNESS

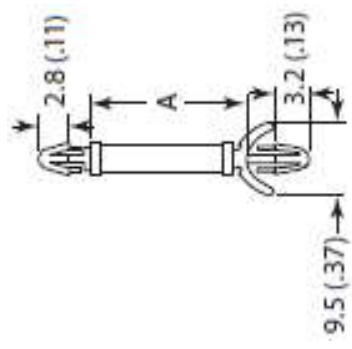

TO SNAP LOCK IN A 3 (.118) Ø HOLE, IN A  
0.8 - 2 (.031 - .078) PANEL THICKNESS

TOLERANCES  
UNLESS NOTED  
≤ 5 mm ±0.2  
5 - 20 mm ±0.3  
20 - 40 mm ±0.4  
40 - 60 mm ±0.5  
60 - 100 mm ±0.8  
≥ 100 mm ±1.0

TITLE: DUAL LOCKING CIRCUIT BOARD SUPPORT

FILE: CBLS3XX  
DWN: CLC  
SHEET: 1 OF 1  
DT: 01/08/15  
SHEET SIZE: A  
RE:



PART #

SEE TABLE



DWG IN  
MM (IN)

PRINT  
TYPE

CA