


**NOTES:**

- DIN 1.0/2.3 FEED-THRU CONNECTOR SPECIFICATIONS:**  
 IMPEDANCE: 75 Ω  
 FREQUENCY RANGE: 0-3 GHz  
 W/S VOLTAGE: 250 Vrms  
 INSULATION RESISTANCE: 1 GΩ min.  
 CONTACT RESISTANCE: 30 mΩ max. (Initial)  
 INSERTION LOSS: -1.0 dB max.  
 RETURN LOSS: per SMPTE 424 M  
 OPERATING TEMPERATURE: -40°C to +85°C  
 LIFE: 500 cycles min.
- MATERIALS:**  
 FRONT PANEL - ALUMINUM, ANODIZED  
 INSERT - THERMOPLASTIC, BLACK  
 CONNECTOR SHELL - COPPER ALLOY, NICKEL PLATED  
 CONTACT: COPPER ALLOY, GOLD PLATED  
 INSULATORS: THERMOPLASTIC  
 HORIZONTAL MARKING STRIP - THERMOPLASTIC, WHITE  
 DESIGNATION STRIP COVER - THERMOPLASTIC, CLEAR  
 KEY-HOLE CLIPS - THERMOPLASTIC  
 SCREWS - STEEL, ZINC OR NICKEL PLATED
- SUPPLIED WITH (4) #12-24 MOUNTING SCREWS.
- DIMENSIONS SHOWN FOR REFERENCE ONLY
- THIS PRODUCT IS RoHS COMPLIANT

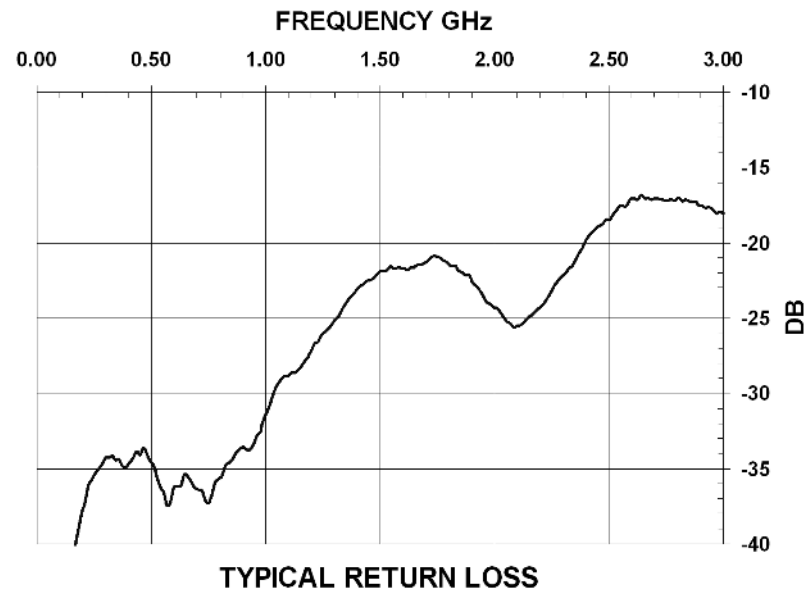

**CUSTOMER DRAWING**

REV	ECO NUMBER	DATE	BY	APVD
A	26775	06/09/11	BL	TJK
REVISIONS				

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES  
 - TWO PLACE DECIMALS ±0.02  
 - THREE PLACE DECIMALS ±0.005

**DO NOT SCALE DRAWING**

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
SIZE	WIDTH	MULT	LBS/M	TEMPER					
FINISH					MATERIAL				
SPEC No.					SPEC No.				
FIRST USED ON				SCALE					
				1:2					
DATE DRAWN	BY	CHKD	APVD						
5/17/10	PNK	PNK	SRC						
		5/17/10	5/17/10						
NAME				PART No.			REV		
DIN 1.0/2.3 FEED-THRU PATCHBAY, RoHS				DIN96K1D			A		