


**NOTES:**

1. MATERIALS:  
 HOOD: PBT GF UL94 V-0 BLACK  
 FRONTSEALING: SILICONE VMQ BLUE  
 SCREW: STAINLESS STEEL  
 O-RING: NBR BLACK
2. TEMPERATURE RANGE: -30°C TO +90°C
3. RECOMMENDED TORQUE FOR SCREW:  
 35Ncm (3.1 in.LB)  
 MAX. TORQUE: 68Ncm (6 in.LB)
4. SINGLE PACKED

\* COMPLETELY TIGHTENED

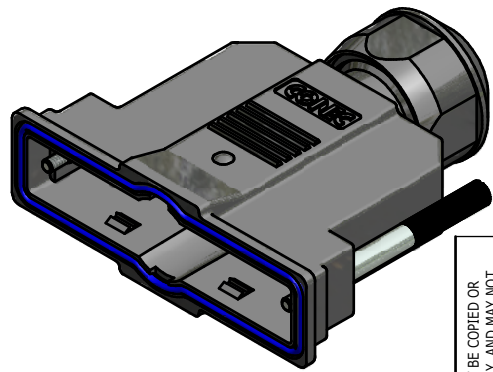

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance			scale:		1,5:1 (1:1)	
	±0,3 unless			material:		SEE NOTES	
	therow. specified		dim. in mm		title:		WATER RESISTANT D-SUB HOOD
	drawn	date	name		37 POS.		JACKSCREW 4-40UNC STAINLESS STEEL
	appd.	date	name		dwg no:		15K1A1434
norm	d-old		DIN-A3		sh: 1		
rev.	description	date	name	part no:		15-004690	

