

MATERIAL

High-resilience polypropylene based (PP) technopolymer, coated with "soft-touch" thermoplastic elastomer (TPE) chemically bonded, hardness 70 Shore A, black colour, matte finish.

The coating material is produced from FDA compliant raw material (FDA CFR.21 and EU 10/2011).

STANDARD EXECUTIONS

Zinc-plated steel pin, hexagon socket at threaded end.

- **IEL+x:** without ring.
- **IEL+x-A:** with matte anodised aluminium ring (ELESA original design).

FEATURES AND APPLICATIONS


The coating, with "soft-touch" elastomer, improves the grip even in the presence of oils, greases and sweat from the hand. For this reason it is suitable for fitness machines, tools and machines for gardening and goods transport, high-precision instruments and disability aids.

SPECIAL EXECUTIONS ON REQUEST


IEL+x-H: with magnifying lens for labels with marks and symbols.



ELESA Original design



Conversion Table	
1 mm = 0.039 inch	
L	
mm	inch
47	1.85
65	2.56

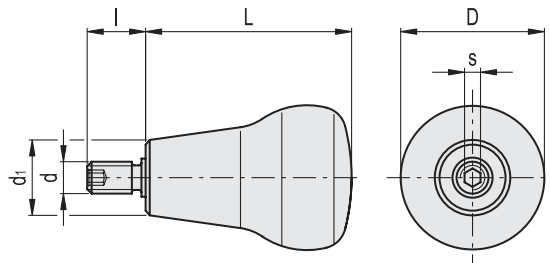

METRIC

Code	Description	D	L	d _{6g}	d ₁	I	s	⚖
26651	IEL.47+x-M10 SOFT	45	47	M10	28	17	5	80
26679	IEL.65+x-M8 SOFT	45	65	M8	23	17	5	102
26681	IEL.65+x-M10 SOFT	45	65	M10	23	17	5	99
26691	IEL.65+x-M10-A SOFT	45	65	M10	23	17	5	99