

### Buchanan

TE Internal #: 1546556-3 PCB Terminal Blocks, Header, Wire-to-Board, 3 Position, .138 in [3.5 mm] Centerline, 1 Row, 55° Wire Entry Angle, 28 – 16 AWG Wire Size

#### View on TE.com >

Connectors > Terminal Blocks & Strips > PCB Terminal Blocks



Terminal Block Connector Type: Header

Connector System: Wire-to-Board

Number of Positions: 3

Centerline (Pitch): 3.5 mm [.138 in ]

Number of Rows: 1

## Features

Connectivity

### Product Type Features

Wire Protection	With
Terminal Block Connector Type	Header
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Stacked Levels	Without
Wire Entry Location	Side
Stacking Configuration	Side Stackable
Stacking Configuration Number of Positions	Side Stackable 3
Number of Positions	3
Number of Positions Number of Rows	3
Number of Positions Number of Rows Wire Entry Angle	3

**C** For support call+1 800 522 6752

PCB Terminal Blocks, Header, Wire-to-Board, 3 Position, .138 in [3.5 mm] Centerline, 1 Row, 55° Wire Entry Angle, 28 – 16 AWG Wire Size



Primary Product Color	Green
Product Orientation	Vertical
Contact Features	
Contact Mating Area Plating Material	Tin
Contact Base Material	Brass
Contact Current Rating (Max)	12 A
Termination Features	
Termination Post & Tail Length	3.5 mm[.138 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Screw Plating Material	Nickel
Screw Material	Brass
Thread Size	M2
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	PA 66
Centerline (Pitch)	3.5 mm[.138 in]

### Dimensions

Wire Size	.08 – 1.4 mm²
Usage Conditions	
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Quantity	200
Packaging Method	Box
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions

PCB Terminal Blocks, Header, Wire-to-Board, 3 Position, .138 in [3.5 mm] Centerline, 1 Row, 55° Wire Entry Angle, 28 – 16 AWG Wire Size



Restricted Materials Above Threshold China RoHS 2 Directive MIIT Order No 32, 2016 EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (2% in Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. Low Halogen - Br, Cl, F, I < 900 ppm per Halogen Content homogenous material. Also BFR/CFR/PVC Free Wave solder capable to 240°C Solder Process Capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



TE Part # CAT-SCH691-SR1A Force Guided Relay with 4 contacts



TE Part # CAT-SCH691-SR1B Force Guided Relay with 6 contacts



TE Part # CAT-SCH691-SR1C Force Guided Relay with 4 high insulated contacts






# **Customers Also Bought**

PCB Terminal Blocks, Header, Wire-to-Board, 3 Position, .138 in [3.5 mm] Centerline, 1 Row, 55° Wire Entry Angle, 28 – 16 AWG Wire Size



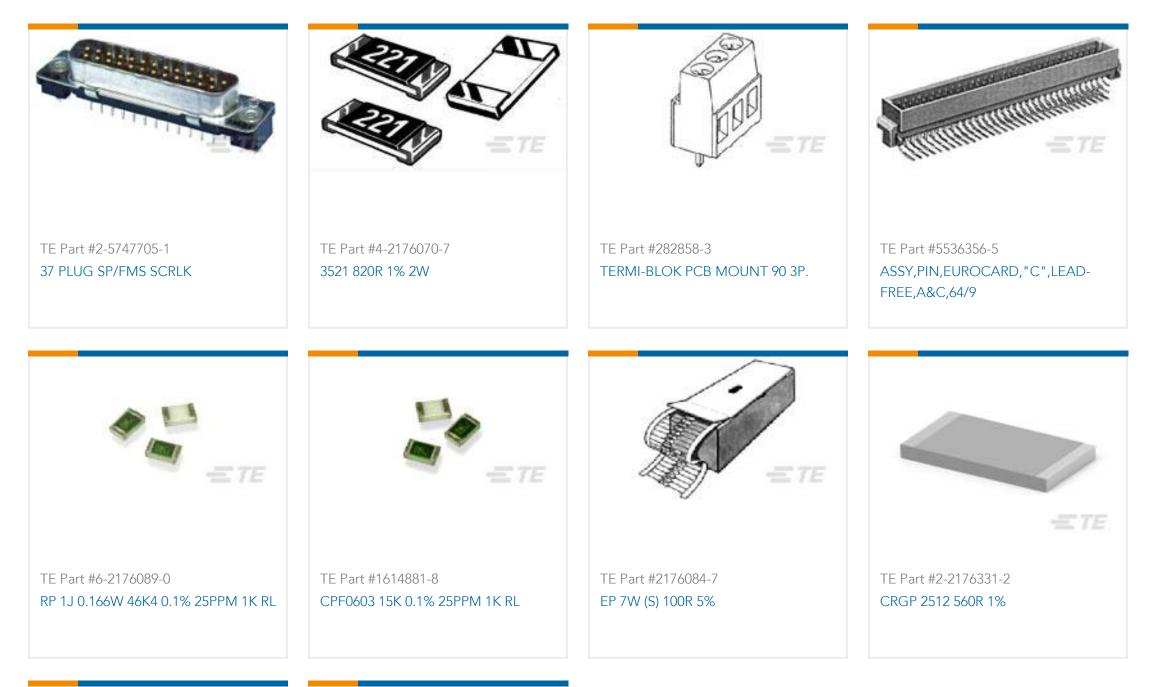



TE Part #1-2176315-4 MELF SMA\_A 1K2 0.1% 15PPM 0204 0.4W



TE Part #2-2176315-4 MELF SMA\_A 8K2 0.1% 15PPM 0204 0.4W

## Documents

Product Drawings 3P,STACKABLE,55 DEG,3.5MM

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1546556-3\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1546556-3\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1546556-3\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

**C** For support call+1 800 522 6752

PCB Terminal Blocks, Header, Wire-to-Board, 3 Position, .138 in [3.5 mm] Centerline, 1 Row, 55° Wire Entry Angle, 28 – 16 AWG Wire Size



### 1-1773458-1\_EURO\_STYLE\_TERMINAL\_BLOCKS\_QRG

English

**Product Specifications** 

Application Specification

English

Agency Approvals

UL

English