

CAB PC 504020 T3B



Sample image

Order symbol: CAB PC 504020 T3B

Product nbr: 8113062

UL Code: 8143062

UL Name: UL CAB PC 504020 T3B

Description: Smoked transparent door

Remarks: Locks on the long side



Including: Cabinet base, door with PUR gasket, 3mm double bit lock(s) with key, screws for mounting plate/DIN-rail and corner plugs.

EAN: 6418074020376


El. number:

- Finland: 3424174
- Denmark: 8212019276
- Sweden: 2539955


CAB 500x400x200

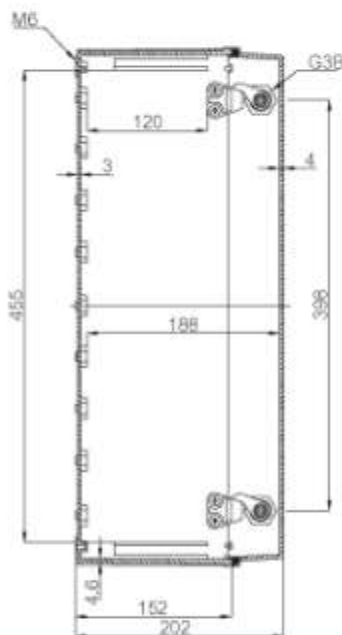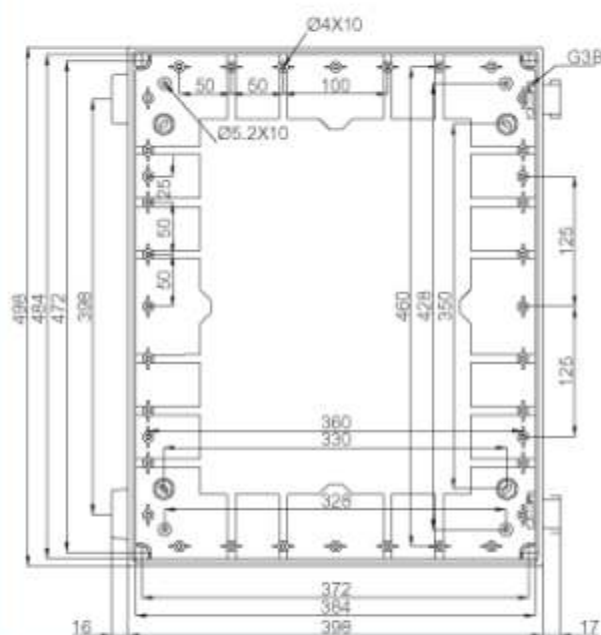


CAB 4050



CAB 5040



CAB 5040 G3B



Dimensions:	Height	Width	Depth
mm:	500	400	200
inch:	19.69	15.75	7.87

Materials:

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover colour:	Clear transparent
Gasket material:	Polyurethane

Temperatures:

Temperature °C (short term):	-40 ... 120
Temperature °C (continuous):	-40 ... 80
Temperature °F (short term):	-40 ... 250
Temperature °F (continuous):	-40 ... 175

Rating:

Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK08;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	UL 508
Flammability Rating:	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	

Certificates:

Certificate FI 40854