# RJ45, Single Port, Tap Up, Thru-Hole, 100 Base-T

ARJE-0031

### **RoHS/RoHS II Compliant**



17.10 x 13.74 x 25.78mm

### **FEATURES:**

- Compliant with IEEE802.3 standard
- 350uH minimum OCL with 8mA bias current
- High performance for maximum EMI suppression
- High reliability 750 mating/unmating cycles

#### > APPLICATIONS:


- Designed for most leading PHY IC manufacturers such as Broadcom, Marvell, Microsemi.
- Supports 10/100 Base-T applications
- Provides signal conditioning, EMI suppression and signal isolation

#### STANDARD SPECIFICATIONS


Operating temperature range: 0°C to +70°C Storage temperature range: -40°C to +85°C

Parameters	Minimum	Typical	Maximum	Units	Notes
Turn Ratio (±3%)	1CT:1CT				
Inductance	350			uН	100kHz, 0.1Vrms, 8mADC
Insertion Loss			-1.0	dB	0.1-100MHz
Return Loss	-16.0				1-30MHz
	-14.5			dB	30-60MHz
	-12.0				80MHz
Crosstalk	-30.0			dB	0.1-100MHz
CMRR	-30.0			dB	0.1-100MHz
Hipot	1500Vrms				Pri to Sec

#### > MECHANICAL DIMENSIONS

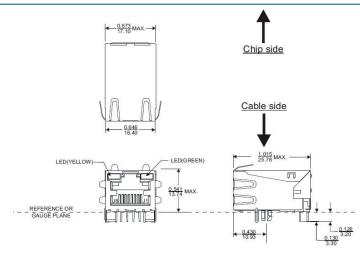

#### **Recommended Land Pattern**



Dimensions: inch/mm (Unless otherwise specified, all tolerances are  $\pm 0.01/0.25$ )

ABRACON IS ISO 9001:2008 CERTIFIED



# RJ45, Single Port, Tap Up, Thru-Hole, 100 Base-T


ARJE-0031

**RoHS/RoHS II Compliant** 



17.10 x 13.74 x 25.78mm

#### **SCHEMATICS**

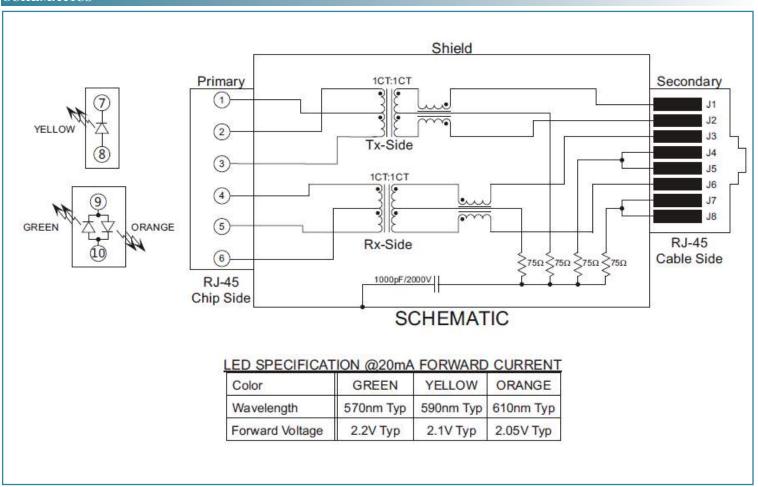

Packing: 50pcs/tray

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



