www.globtek.com	Drawing Title: USB C MALE 3.1 E-MARK in Plug compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED) to USB C MALE 3.1 compliant with Directive (RED) to	,
186 Veterans Drive, Northvale, NJ 07647	odel No. Low voltage cable	
Tel (201) 784-1000	Part No./Ordering No. USBCM31EM3M0USBCMMMBKR	Rev A1
Fax (201) 784-0111	Part No./Ordering No. USBCMSTEMSMOUSBCMMMBKK	Rev A I

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at https://www.globtek.com/iso-certificates/

Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (https://en.globtek.com/terms-and-conditions/).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

www.globtek.com	Drawing Title: USB C MALE 3.1 E-MARK in Plug compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED) to USB C MALE 3.1 compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED), GT Cable #(32AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB OD:5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80 Deg.C, 30V, , Approvals: , 3000mm, GlobTek Black	
186 Veterans Drive, Northvale, NJ 07647	Model No. Low voltage cable	
Tel. (201) 784-1000 Fax (201) 784-0111	Part No./Ordering No. USBCM31EM3M0USBCMMMBKR	Rev A1

REVISION HISTORY

REV DESCRIPTION		SUB	DATE	APPROVED
A1	Change a note for USB Type-C to Type-C cables	QA	10/29/2021	QA
Α	INITIAL RELEASE	DR	01/07/2020	QA

Cordset Information:

 $CordsetColor: GlobTek\ Black$


Cord Length (mm):3000

3D File Download https://www.globtek.com/file/dl/usb16-usb16.zip


NOTES:

ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW

www.globtek.com	Drawing Title: USB C MALE 3.1 E-MARK in Plug compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED) to USB C MALE 3.1 compliant with Directive (to 2014/53/EU Radio Equipment Directive (RED), GT Cable #(32AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB OD:5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80 Deg 3000mm, GlobTek Black	,
186 Veterans Drive, Northvale, NJ 07647	Model No. Low voltage cable	
Tel (201) 784-1000	Part No./Ordering No. USBCM31EM3M0USBCMMMBKR	Rev A1

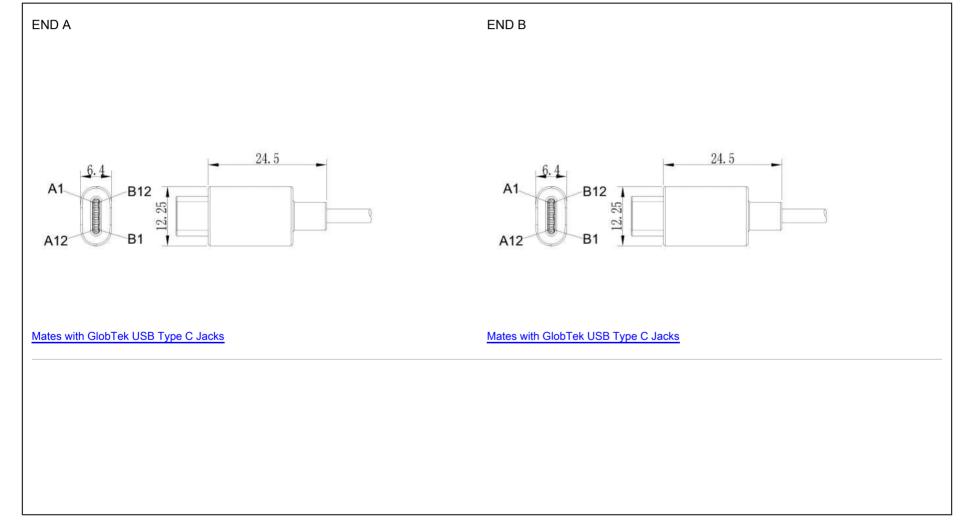

www.globtek.com	Drawing Title: USB C MALE 3.1 E-MARK in Plug compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED) to USB C MALE 3.1 compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED), GT Cable #(32AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB OD:5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80 Deg.C, 30V, , Approvals: , 3000mm, GlobTek Black	
186 Veterans Drive, Northvale, NJ 07647	Model No. Low voltage cable	
Tel. (201) 784-1000 Fax (201) 784-0111	Part No./Ordering No. USBCM31EM3M0USBCMMMBKR	Rev A1

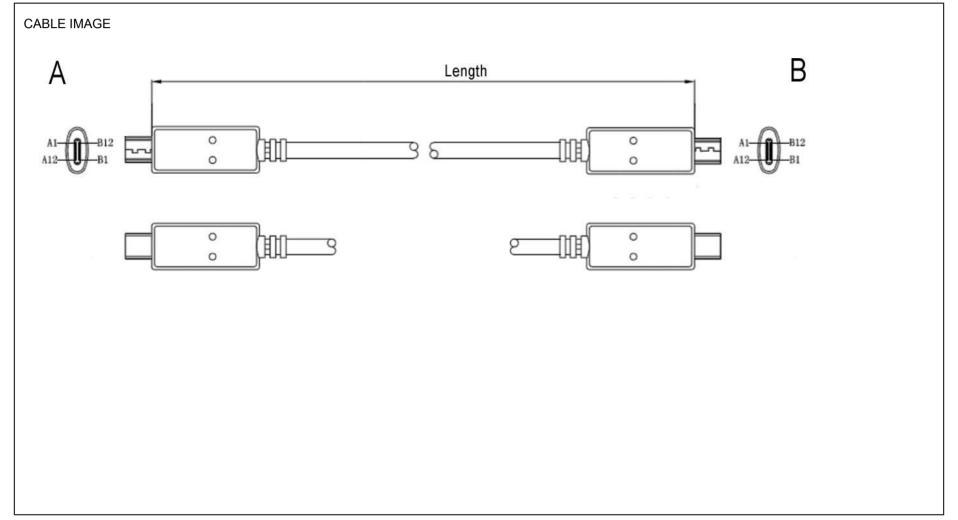

www.globtek.com	Drawing Title: USB C MALE 3.1 E-MARK in Plug compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED) to USB C MALE 3.1 compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED), GT Cable #(32AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB OD:5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80 Deg.C, 30V, , Approvals: , 3000mm, GlobTek Black		
Northvale, NJ 07647	thvale, NJ 07647 Model No. Low voltage cable		
Tel. (201) 784-1000 Fax (201) 784-0111	Part No./Ordering No. USBCM31EM3M0USBCMMMBKR	Rev A1	

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB 0:5.0 scription:GT Cable 2AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB 0:5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80	2022/2380 and 2014/53/EU Radio Equipment Directive (RED)
0:5.0 scription:GT Cable :2AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB 0:5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80	2022/2380 and 2014/53/EU Radio Equipment Directive (RED) BRating (V):20
scription:GT Cable :2AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB ::5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80	(RED) BRating (V):20
2AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB 0:5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80	Rating (V):20
:5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80	
	Rating (A):5.0
	• · ·
g.C, 30V, , Approvals:	Gender:Male
lor:GlobTek White	Overmolded:Yes
re Gauge(AWG):SEE CODE	
nd:9	
pe:UL 2725	
mperature:80° C	
ps:5	
ts:30	
0:5.0	
nductorsColors:	
re nd pe mp lts 0:5	Gauge(AWG):SEE CODE d:9 :UL 2725 perature:80° C s:5 :30

Plug Approvals	Cable Approvals	Connector Approvals
AGENCY ONLINE DOCUMENTS	http://www.globtek.info/certs/USB%20cables/	
RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t3a000004eU	vQAAU_
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pd	<u>If</u>
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf	
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf	
CE.UKCA.Cord	https://globtek.secure.force.com/spec/ec_decl_product_	_model_family_incl_cord?id=01t3a000004eUvQ
IPXY rating is based on 3rd party testing and cu	stomers should check suitability and test system level IPX	XY rating before ordering.

GlobTek, Inc. www.globtek.com	Drawing Title: USB C MALE 3.1 E-MARK in Plug compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED) to USB C MALE 3.1 compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED), GT Cable #(32AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB OD:5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80 Deg.C, 30V, , Approvals: , 3000mm, GlobTek Black	
186 Veterans Drive, Northvale, NJ 07647	Model No. Low voltage cable	
Tel. (201) 784-1000	Part No./Ordering No. USBCM31EM3M0USBCMMMBKR	Rev A1
Fax (201) 784-0111	Fatt No./Ordering No. OSDONSTENSIVIOOSDONIVIIVIDAN	IZEA V.I

Hanking:					
Description:					
Image:					
Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):					

www.alobtek.com	Drawing Title: USB C MALE 3.1 E-MARK in Plug compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED) to USB C MALE 3.1 compliant with Directive (EU) 2022/2380 and 2014/53/EU Radio Equipment Directive (RED), GT Cable #(32AWG*1P+AM)*4+32AWG*2C+32AWG*4C+22AWG*2C+AB OD:5.0: SEE CODE / 9 Conductors, 5.0mm OD, UL 2725, 80 Deg.C, 30V, , Approvals: , 3000mm, GlobTek Black	
	Model No. Low voltage cable	
Tel (201) 784-1000	Part No./Ordering No. USBCM31EM3M0USBCMMMBKR	Rev A1

If system load requirement exceeds 2A, VBUS may drop by 5% or more. The VBUS undervoltage detection threshold may need to be increased to accommodate cable voltage drop. Please check your controller's default setting and adjust accordingly. PIN ASSIGNMENT USB3.1 C/M(E-MARKER) USB3.1 C/M SBU1 B8 SBU2 VCONN VCONN SBU₂ SBU1 CC E-MARKER D+ B11 SSRX1+ SSTX1+ SSTX1-B10SSRX1-B2 SSTX2+ SSRX2+ B3 SSTX2-SSRX2-2ANG A11 SSRX2+ SSTX2+ SSTX2-A10 SSRX2-ZAWG A2 SSTX1+ SSRX1+ SSRX1-A3 SSTX1-B10 -VBUS (A4,A9,B4,B9) A4,A9,B4,B9 ±10nF*2 GND (A1,A12,B1,B12) A1,A12,B1,B12 BRAID SHELL(SHIELD) SHELL(SHIELD)