



### Electrical Specifications

**Center Frequency:** 202 MHz  
**3dB Bandwidth Min:** 170-230 MHz  
**Insertion Loss:** 1.5 dB Max at Fo  
**Attenuation:** >45 dB @ ≤120 MHz  
>35 dB @ ≥300-900 MHz  
**In/Out Impedance:** 50 Ω


### Mechanical

**Connector Type:** F-Type (F)  
**Dimensions:** 2.38 x 1.0 x 1.0 Inches

### Environmental

**Operating Temperature:** -30 to +85° C  
**Storage Temperature:** -40 to +95° C  
**Shock:** 20 G. 11 ms  
**Vibration:** 20 G. 5 to 200 MHz

### Outline Drawing:

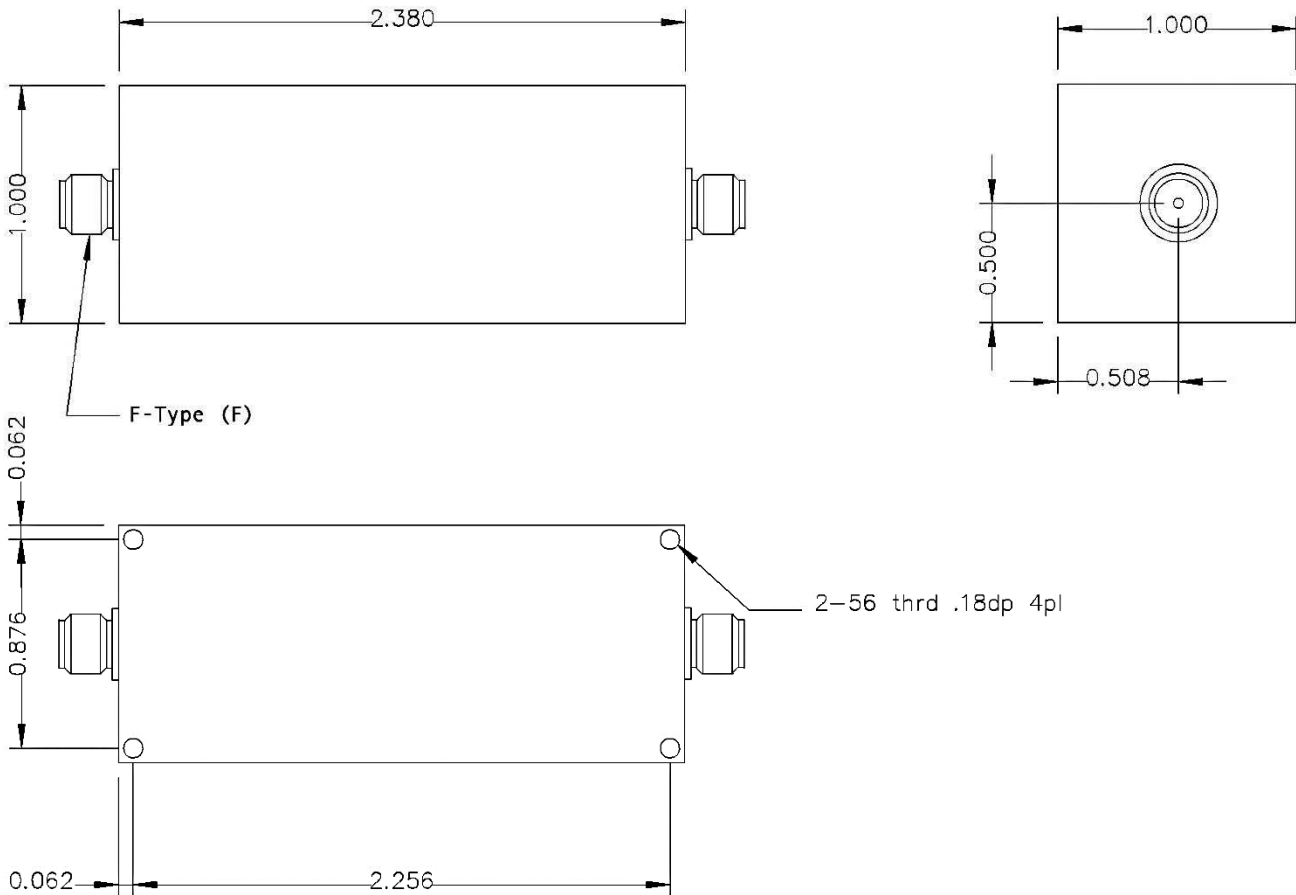



### Response Plot:

