
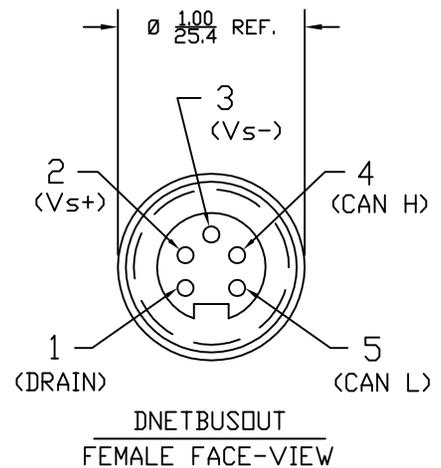
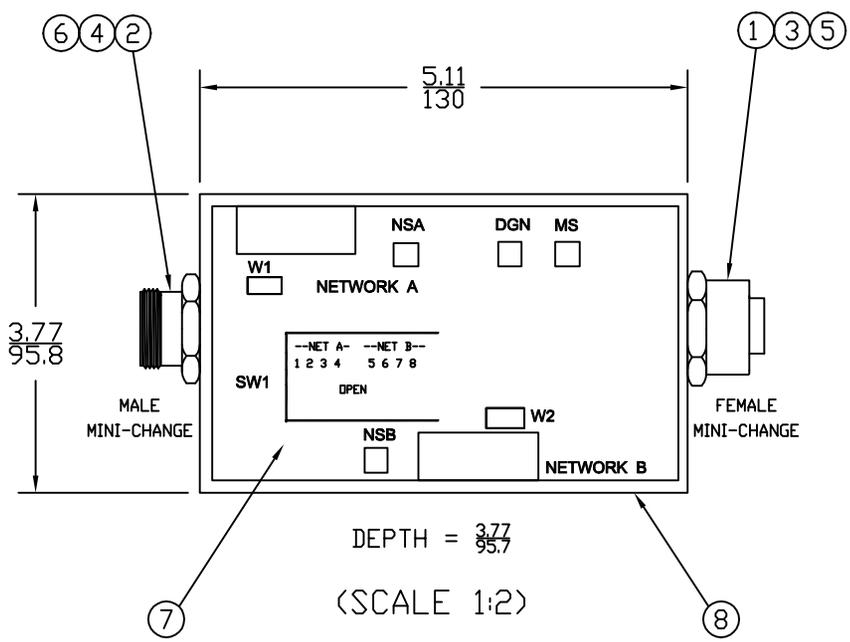


| | |
|------------|-----------------|
| SAP P/N# | ENGINEERING NO. |
| 1300390389 | DNETEXT-C |

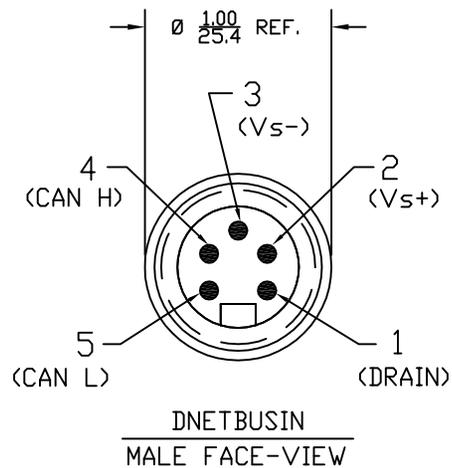

NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) ELECTRICAL DATA (MAXIMUM POWER):
 VOLTAGE: 11-25V DC
 NETWORK A: 140mA @ 11V DC - 60mA @ 25V DC
 NETWORK B: 10mA @ 11V DC - 10mA @ 25V DC
 POWER: 1.8 W
 POWER SUPPLY: POWERED BY 24V DC BUS LINE
- 4) BAUD RATE: 125K, 250K, 500K, 1M - AUTOMATIC SELECTION
- 5) MOUNTING: PANEL-MOUNT, 4 SCREWS
- 6) ENVIRONMENTAL:
 PROTECTION: IP65
 TEMPERATURE: 0°C TO +70°C
- 7) ASSEMBLY IS RoHS COMPLIANT.

| 8 | 1 | HOUSING | PLASTIC | GRAY BACK, CLEAR TOP |
|------|------|----------------|--------------|----------------------|
| 7 | 1 | CIRCUIT BOARD | - | - |
| 6 | 5 | PIN CONTACT | COPPER ALLOY | GOLD PLATED |
| 5 | 5 | SOCKET CONTACT | COPPER ALLOY | GOLD PLATED |
| 4 | 1 | INSERT: MALE | PVC | YELLOW |
| 3 | 1 | INSERT: FEMALE | PVC | GRAY |
| 2 | 1 | SHELL: MALE | ZINC DIECAST | BLACK COATING |
| 1 | 1 | SHELL: FEMALE | ANODIZED AL | GRAY |
| ITEM | QTY. | DESCRIPTION | MATERIAL | FINISH |

SD RELEASE
 EC NO: WNA2010-0151
 DRWN: YOU 8/28/09
 CHKD: BWOODMAN09/08/31
 APPR: JFMURPHY 2009/08/31

QUALITY SYMBOLS
 ▽=0
 ▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|----------|-------|-------|
| 4 PLACES | ±---- | ±---- |
| 3 PLACES | ±---- | ±.005 |
| 2 PLACES | ±---- | ±.010 |
| 1 PLACE | ±---- | ±.020 |

ANGULAR ±1°
 DRAFT WHERE APPLICABLE
 MUST REMAIN
 WITHIN DIMENSIONS

DIMENSION STYLE
 INCH/MM

DRAWN BY DATE
 YOU 2009/08/28

CHECKED BY DATE
 BWOODMAN 2009/08/31

APPROVED BY DATE
 JFMURPHY 2009/08/31

MATERIAL NO.
 SEE CHART

SIZE
 A

SCALE
 1:2

DESIGN UNITS
 INCH

THIRD ANGLE PROJECTION

TITLE
 DEVICENET BUS EXTENDER

MOLEX INCORPORATED

DOCUMENT NO.
 SD-130039-017

SHEET NO.
 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION