


Darlington

2SB1647



Silicon PNP Epitaxial Planar Transistor (Complement to type 2SD2560)

Application : Audio, Series Regulator and General Purpose

■Absolute maximum ratings (Ta=25°C)

| Symbol | Ratings | Unit |
|------------------|---------------------------|------|
| V _{CB0} | -150 | V |
| V _{CE0} | -150 | V |
| V _{EB0} | -5 | V |
| I _c | -15 | A |
| I _B | -1 | A |
| P _c | 130(T _C =25°C) | W |
| T _J | 150 | °C |
| T _{stg} | -55 to +150 | °C |

■Electrical Characteristics (Ta=25°C)


| Symbol | Conditions | Ratings | Unit |
|----------------------|---|----------|------|
| I _{CB0} | V _{CB} =-150V | -100max | μA |
| I _{EB0} | V _{EB} =-5V | -100max | μA |
| V _{(BR)CEO} | I _c =-30mA | -150min | V |
| h _{FE} | V _{CE} =-4V, I _c =-10A | 5000min* | |
| V _{CE(sat)} | I _c =-10A, I _B =-10mA | -2.5max | V |
| V _{BE(sat)} | I _c =-10A, I _B =-10mA | -3.0max | V |
| f _T | V _{CE} =-12V, I _E =2A | 45typ | MHz |
| C _{OB} | V _{CB} =-10V, f=1MHz | 320typ | pF |

*h_{FE} Rank O(5000to12000), P(6500to20000), Y(15000to30000)


■Typical Switching Characteristics (Common Emitter)

| V _{CC} (V) | R _L (Ω) | I _c (A) | V _{BB1} (V) | V _{BB2} (V) | I _{B1} (mA) | I _{B2} (mA) | t _{on} (μs) | t _{stg} (μs) | t _f (μs) |
|---------------------|--------------------|--------------------|----------------------|----------------------|----------------------|----------------------|----------------------|-----------------------|---------------------|
| -40 | 4 | 10 | -10 | 5 | -10 | 10 | 0.7typ | 1.6typ | 1.1typ |


External Dimensions MT-100(TO3P)

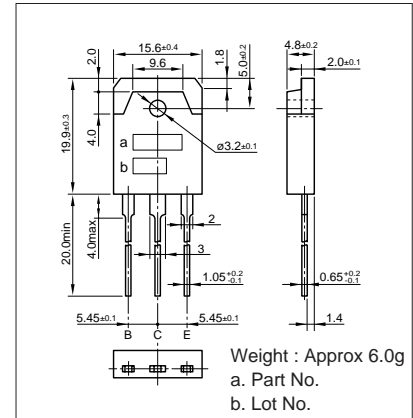


I_c-V_{CE} Characteristics (Typical)

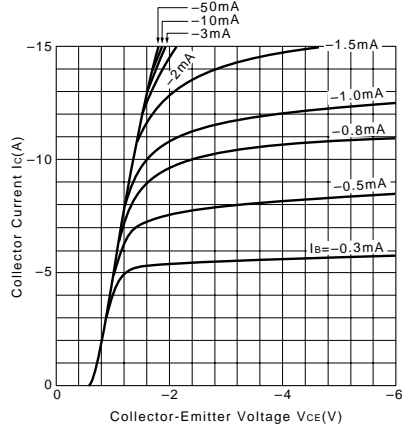


V_{CE(sat)}-I_B Characteristics (Typical)

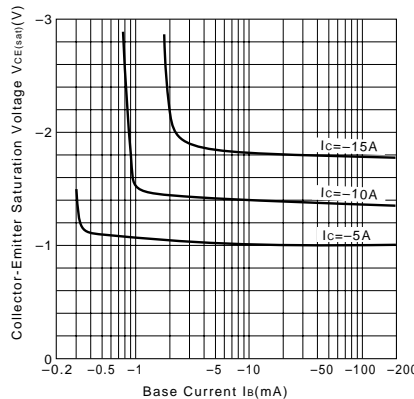


I_c-V_{BE} Temperature Characteristics (Typical)

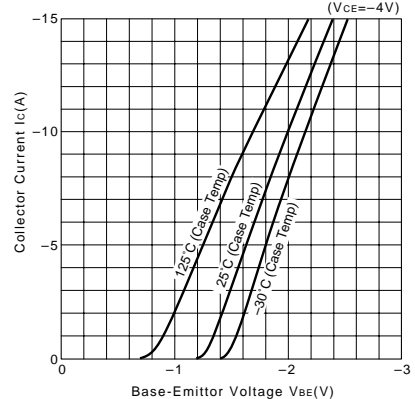


h_{FE}-I_c Characteristics (Typical)

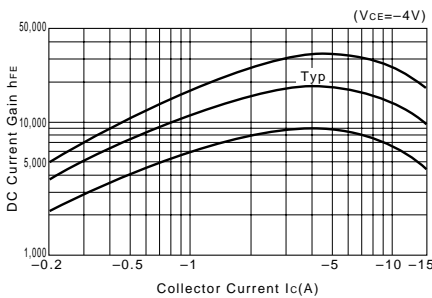


h_{FE}-I_c Temperature Characteristics (Typical)

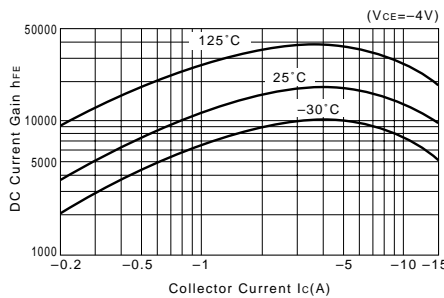


θ_{j-a}-t Characteristics

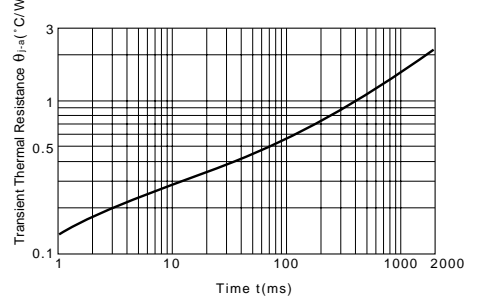

f_T-I_E Characteristics (Typical)

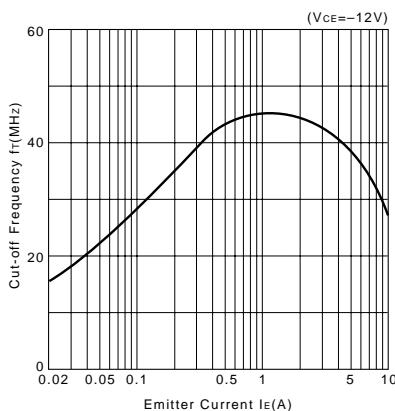

Safe Operating Area (Single Pulse)

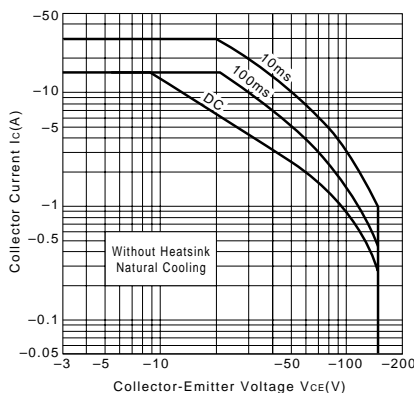

P_c-T_a Derating

