



Length

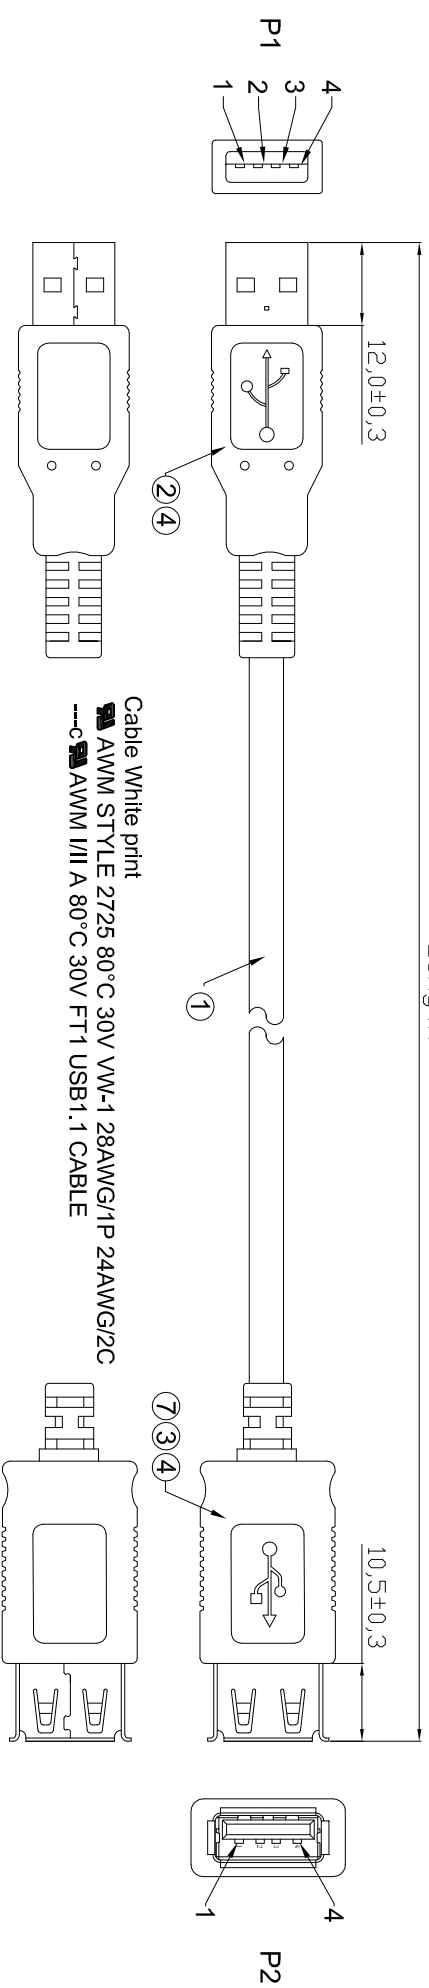


PIN ASSIGNMENT

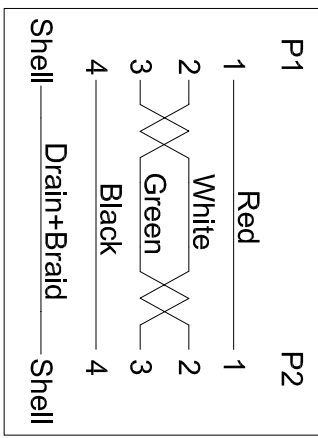

WSW PIN	Jacket color	Length(mm)
AK669-18-BLACK	Black	1800±50
AK669-30-BLACK	Black	3000±50
AK669-50-BLACK	Black	5000±50

- Electrical test:**
1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 5Mohm min.
 4. Dielectric test: DC 300V

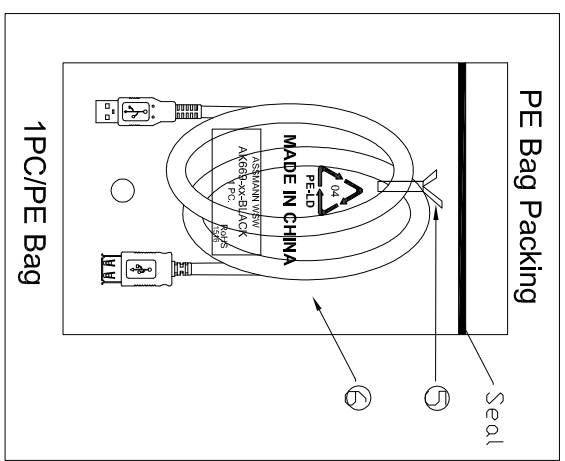

NO.	NAME.	Q'TY	SPECIFICATION
①	Inner Jacket	NA	LD-PE
②	PE Bag	1	Clear Print black "MADE IN CHINA" + "1PC"
③	TIE	1	Black
④	Out Jacket	NA	Black PVC-45P
⑤	CONN	1	USB A Female Shell:Nickel Pin:G/F Insulator color:White, short type
⑥	CONN	1	USB A Male Shell:Nickel Pin:G/F Insulator color:White
⑦	Cable	1	USB1.1 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Black

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
①	Drawn	09.05.2016	Amy

Customer-No.	Name	Date
ASSMANN WSW-No.	Amy	09.05.2016
AK669-xx-BLACK	Amy	09.05.2016

ASSMANN
components

Drawing-No. **ASS 7641 CA** rev00
Replace Sheet

A	1	2	3	4	5	6	7
B	1	2	3	4	5	6	7
C	1	2	3	4	5	6	7
D	1	2	3	4	5	6	7
E	1	2	3	4	5	6	7
F	1	2	3	4	5	6	7
G	1	2	3	4	5	6	7
H	1	2	3	4	5	6	7