

## 345 Series Shock Safe Circuit Board Mount Enclosed Fuse Holders














## **Dimensions**





## **Recommended hole Pattern**



## **Additional Information**







Samples

## **Product Characteristics**

Compatible Fuse Types	3AG 3AB 5x20mm					
Description	Similar to our Shock-Safe panel mount fuseholders, this series is designed per IEC Standards 60127-6. Two different knob styles available are available for use with 3AG and 3AB $(\%'' \times 1\%'')$ or $5 \times 20$ mm fuses.					
Electrical	Insulation Resistance: 10,000 megohm minimum at 500 VDC Contact Resistance: Less than .005 ohm average at a current of one ampere.					
Dielectric Strength	4000 volts minimum. Mounting: Intended for soldering to printed circuit boards.					
Molded Parts	Body Material: Black glass-filled thermoplastic (UL 94V0).					
Knob	Screwdriver slot, fuse extractor type with nickel-plated, copper alloy insert. Spring-loaded, bayonet style. Knob Material: Grey or Black glass-filled thermoplastic (UL94 V-0)					
Terminals	Brass. Tin-plated.					
Ambient Temperature	-40°C to +85°C.					

## **Agency Approvals**

Agency	Agency File Number					
<b>71</b> 2	E14721					
<b>(A)</b>	7316					
ĎŶ <u>E</u>	133923					

<sup>\*</sup> Please refer to Fuseology section for information on proper fuseholder re-rating.

## **Ordering Information**

Catalog Number	Fuse Size
345 101	¼" × 1¼" Fuses
345 121	5 × 20mm Fuses

Body only: 345 101-010

Knob only: 345 101-020 (¼" × 1¼") Grey;

345 121-020 (5 × 20mm) Black.



# 345 Series Panel Mount Enclosed Fuse Holders











## **Additional Information**







## **Product Characteristics**


Compatible Fuses	For 3AB/3AG, 5×20mm Fuses				
Description	Designed to eliminate the possibility of electrical shock, as defined in IEC standards 60127-6. The universal fuseholder body will accept 3AB, 3AG, and $5\times20\text{mm}$ fuse sizes.				
Electrical Insulation Resistance: 10,000 megohm minimum a 500 VDC. Contact Resistance: Less than .005 ohm average at currents up to 1 ampere. Dielectric Stre 4,000 volts minimum.					
Mounting	Threaded styles withstand 15 inlb. mounting torque. Low profile and High profile panel thickness: .032" min./.310" max.				
Molded Parts	Body Material: Black glass-filled thermoplastic (UL 94V0).				
Knob Material	Grey or black glass-filled thermoplastic (UL94 V-0) Hex Nut Material: Black glass-filled thermoplastic.				
Knob	Fuse Extractor type with plated copper alloy insert. Plated copper alloy contact clips. Spring loaded, locking mechanism provides an anti-tease feature and will not vibrate loose.				
Terminals	Plated cooper alloy, A-187; dual purpose terminal accepts wire for soldering or a Quick-Connect receptacle.				
Ambient Temperature	-40°C to +85°C.				

<sup>\*</sup> Please refer to Fuseology section for information on proper fuseholder re-rating.

Agency Approval						
Agency	Agency File Number	3AG/AB	5×20mm			
71	E14721	20A, 600V	20A, 600V			
<b>®</b> .	7316	20A, 600V	20A, 600V			

# Cartridge Fuse Holders Enclosed Fuseholders > Panel Mounted

## **Dimensions**

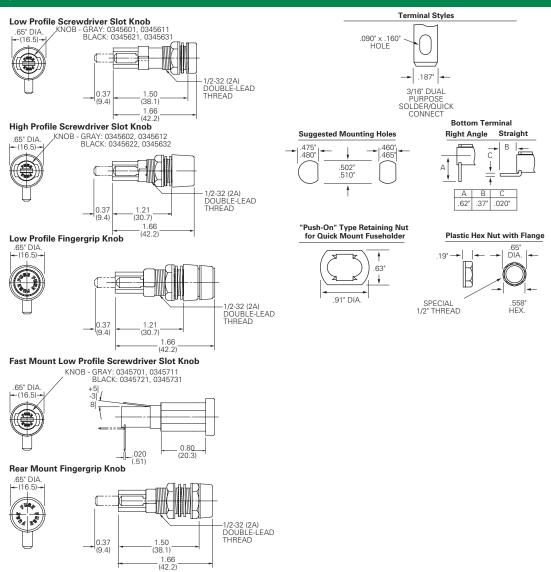

## **Part Numbering System**

Part Number		KnobType	Low	High	Front	Rear	Rt. Angle	Straight	Packing
(3AG/AB)	5x20mm	Knob type	Profile	Profile	Mount	Mount	Terminal	Terminal	racking
03450601H	03450621H	Screwdriver Slot	X		X		X		Bulk (100 pieces)
03450602H	03450622H	Screwdriver Slot		X	X		X		Bulk (100 pieces)
03450603H	03450623H	Finger Grip		X	X		X		Bulk (100 pieces)
03450611H	03450631H	Screwdriver Slot	X		X			X	Bulk (100 pieces)
03450612H	03450632H	Screwdriver Slot		X	X			X	Bulk (100 pieces)
03450613H	03450633H	Finger Grip		X	X			X	Bulk (100 pieces)
03450701H		Screwdriver Slot	X		X		X		Bulk (100 pieces)
03450711H		Screwdriver Slot	X		X			X	Bulk (100 pieces)
03450903H	03450923H	Finger Grip		X		X	X		Bulk (100 pieces)
03450913H	03450933H	Finger Grip		X		X		X	Bulk (100 pieces)