



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1920-1980/2110-2170 MHz Cavity Duplexer

Part Number: AD1950-2140D390



Characteristics	Band 1 (Rx)	Band 2 (Tx)
Frequency:	1920-1980 MHz	2110-2170 MHz
Bandwidth:	60 MHz	60 MHz
Insertion loss:	1.0 dB max	0.7 dB max
Return loss:	18 dB min	18 dB min
Ripple:	1.0 dB max	0.7 dB max
Isolation:	75 dB min@2110-2170 MHz 50 dB min@1980-2110 MHz	50 dB min@1920-1980 MHz 50 dB min@1980-2110 MHz
Rejection:	65 dB min@0-1820 MHz 75 dB min@2110-2170 MHz 65 dB min@2270-2305 MHz 65 dB min@2305-2900 MHz 65 dB min@3400-3600 MHz 65 dB min@3860-3980 MHz 60 dB min@5160-5845 MHz 60 dB min@5845-11800 MHz 75 dB min@2110-2170 MHz 50 dB min@1980-2110 MHz	65 dB min@0-1820 MHz 75 dB min@1920-1980 MHz 60 dB min@2270-2305 MHz 60 dB min@2305-2900 MHz 60 dB min@3400-3600 MHz 60 dB min@3860-3980 MHz 60 dB min@5160-5845 MHz 60 dB min@5845-11800 MHz 50 dB min@1920-1980 MHz 50 dB min@1980-2110 MHz
Power handling:	16 watts average, 320 Watts peak	16 watts average, 320 Watts peak

Mechanical	
Mounting Method:	Threaded Mounting Holes
Connector Type:	N-Type (F)
Dimensions:	5.82" x 4.40" x 1.37" in

Environmental	
Operating Temperature:	-40 to +70 deg.C
Storage Temperature:	-50 to +90 deg.C




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1920-1980/2110-2170 MHz Cavity Duplexer

Part Number: AD1950-2140D390



Outline drawing:

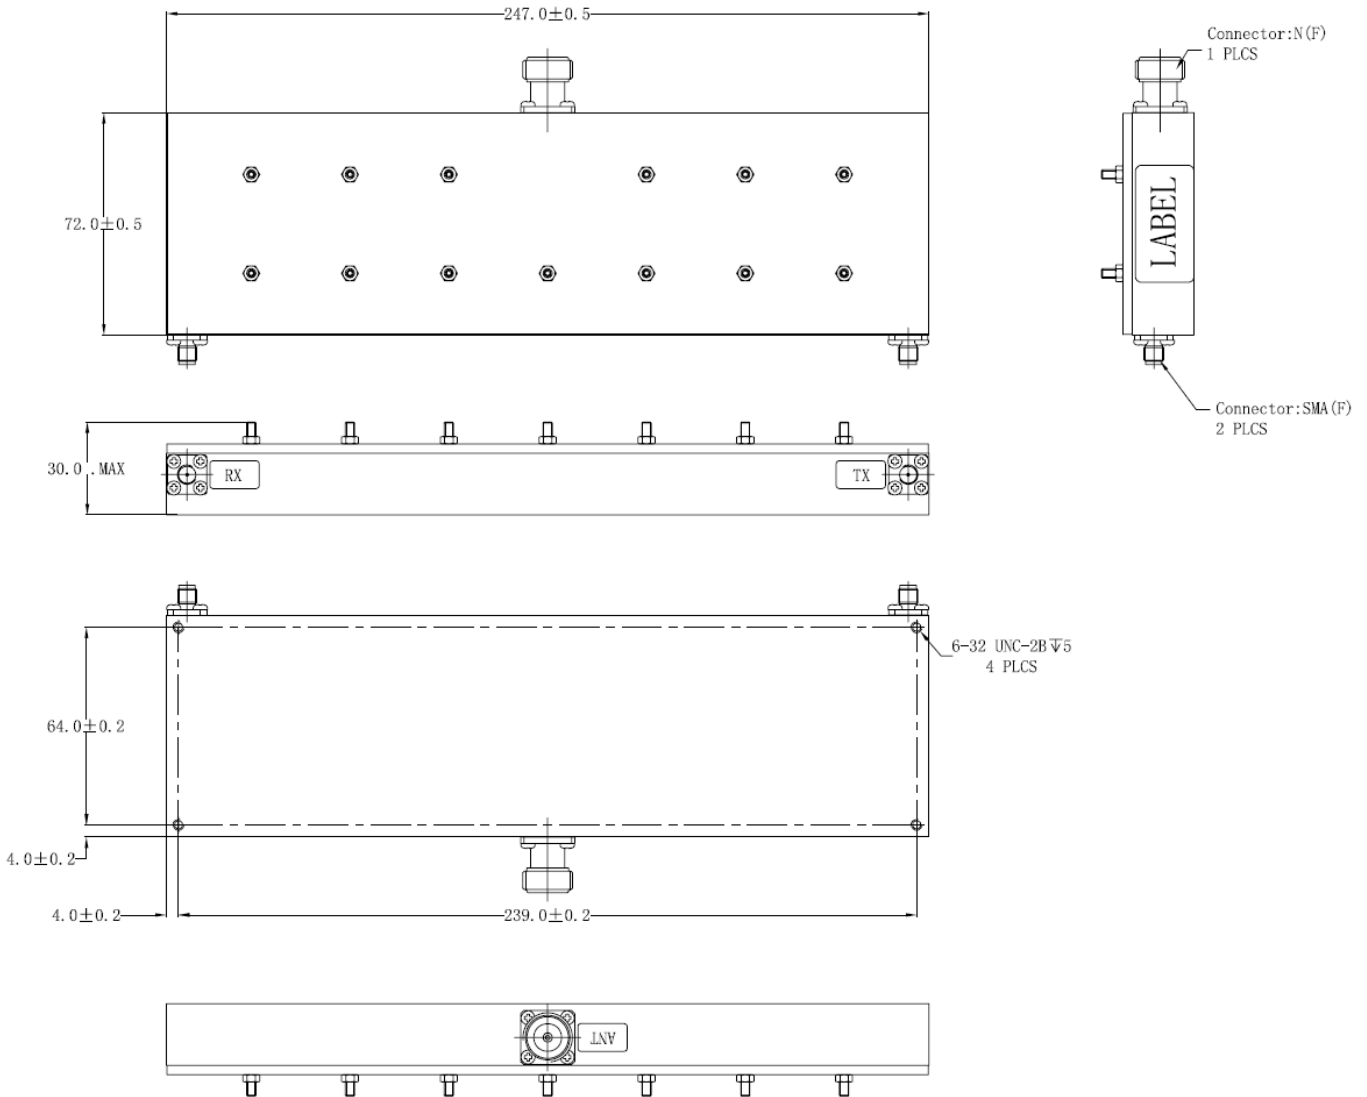



Plot:

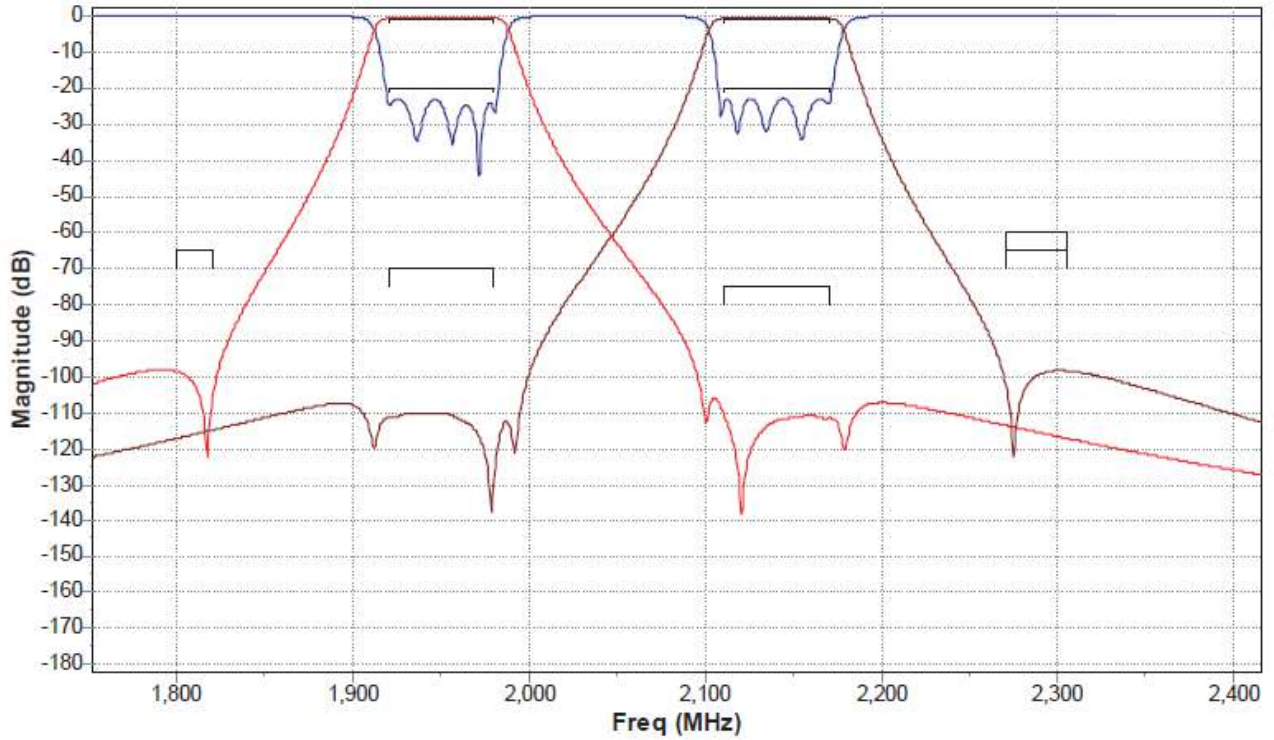


Fig.1 Return Loss and Rejection

