


DRAWING REVISIONS			
REV	DOCUMENT	APP	DATE
A	C.O. 08-1053	DEU	5/29/08

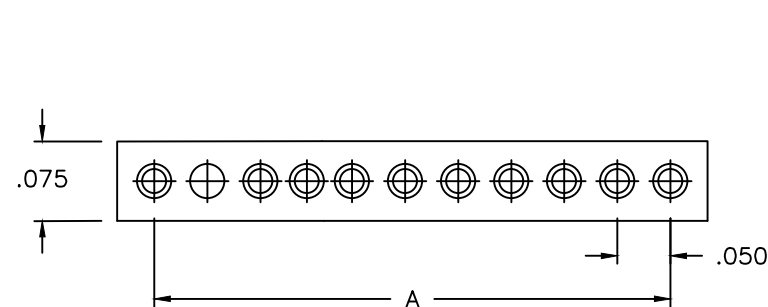

**Cinch Dura-Con strip**  
Thermoplastic Glass-Rienforced Strip Connector

**CS A 1 - 10 S 5 C 4 - 01.0 G02**

**Guide Pin (Socket Only) Empty Cavity (Pin Only)**  
G02 = Guide Pin Position No.2  
GX = Special Position, Consult Factory

**Lead length in inches**  
01.0 = Solid copper wire only  
18.0 = Stranded wire only  
36.0 = Stranded wire only

**Insulation Color, Solid Wire Finish, Solid Cup Finish**  
3 = Tin-Plated (Solid Wire Only)  
\*4 = Gold-Plated (Solid Wire Only)  
\*5 = Color Coded Per MIL-Std. 681, System 1 System 1. (Standard Wire Only)

**Insulation Wire or Solid Wire Type**  
C = Solid Copper  
E = MIL-W-16878/4, 7 Strand

**Contact Centers**  
A=0.050 (24Ga.)



**Contact Position**  
1=Contacts in every position

**No. of Contact Positions**  
1 through 60

**Contact Type**  
P = Pin  
S = Socket

**Wire Size in AWG**  
5 = 25 AWG Solid Copper Wire  
6 = 26 AWG Stranded Wire

**STANDARD WIRE**

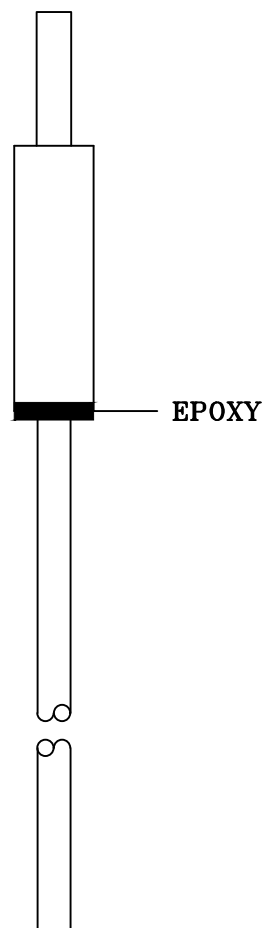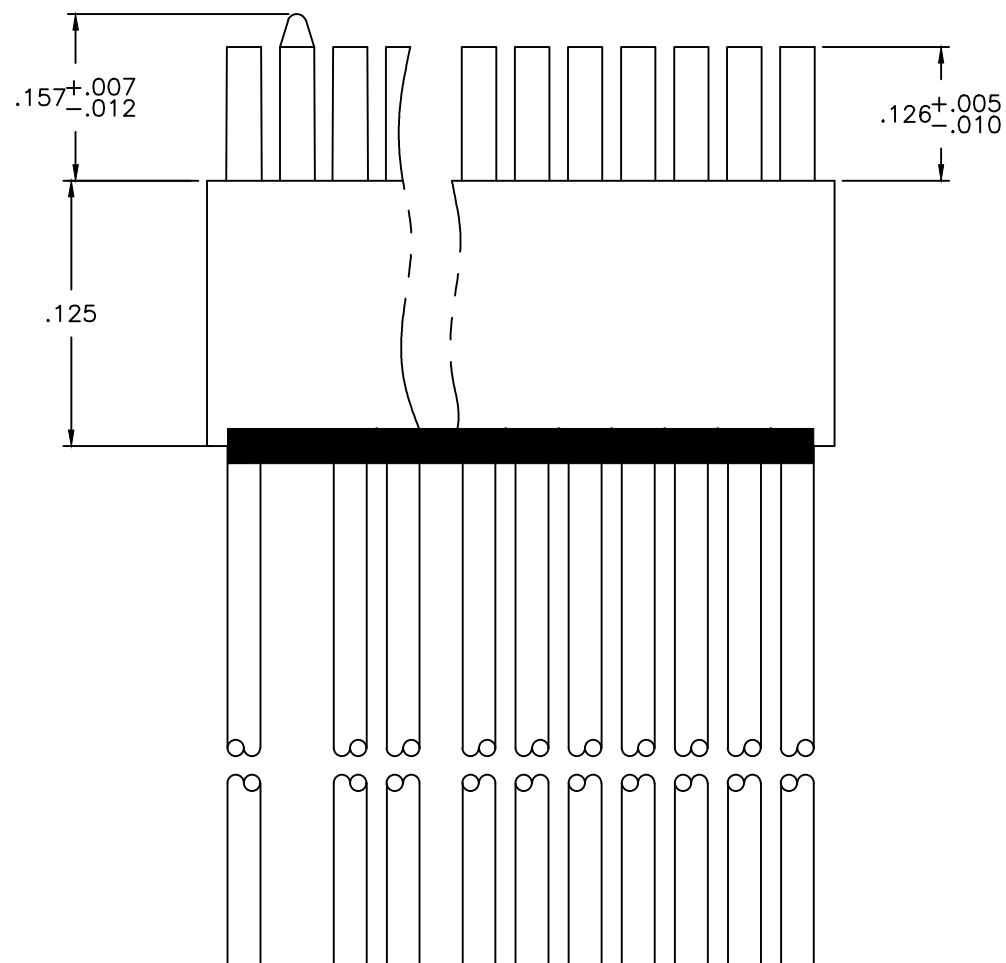

UNITS <b>ENGLISH</b>		<b>AUTOCAD</b>	<b>Cinch</b>	1700 FINLEY RD LOMBARD, IL. 60148
DO NOT SCALE DRAWING	DRAWN BY D. URBANEK	DATE 3/27/08	TITLE DURACON SOCKET STRIP ASSEMBLY, 26 AWG, COLOR CODED, GUIDE PIN POS. 2	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	DESIGN ENGINEER D. URBANEK	DATE 4/03/08	MATERIAL	
FILLET/RADIUS .02 MAX.	DESIGN ENGINEERING APP. M. RICHMOND	DATE 5/29/08	MATERIAL SPEC NUMBER	FINISH
TOLERANCES X ± .1 XX ± .01 XXX ± .005 ANGULAR ± .5	MFG. ENGINEERING APP. B. KEITH	DATE 5/06/08	CAD FILE NUMBER 2810207035	DRAWING NUMBER <b>281 02 07 035</b>
THIS DOCUMENT IS THE PROPERTY OF CINCH. NEITHER THIS DOCUMENT NOR ANY OF THE INFORMATION CONTAINED IN IT MAY BE DUPLICATED OR DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF CINCH.	QUALITY ASSURANCE APP. B. LAY	DATE 5/16/08	CAGE IDENT NO. 71785	SIZE B
			SCALE 6:1	SHEET 1 OF 2