




## Wirewound/Metal Film Resistors, Commercial Power, Vertical Mount



### FEATURES

- High power dissipation in small volume
- Ideal for pulsing applications
- Stand-up mounting saves space on PCB
- High heat and moisture resistance



RoHS  
COMPLIANT

Please reference the Vishay Dale closest equivalents: CPCx or CPCC, CPCF High Volume (for CPCx datasheet please visit our website: <http://www.vishay.com/doc?30218> and for CPCC, CPCF High Volume datasheet: <http://www.vishay.com/doc?30116>).

**Note:**

- There may be slight differences between the Vishay Phoenix and the Vishay Dale crosses

### TECHNOLOGY

**SMW:** The resistor element is a resistive wire, which is wound in a single layer on a ceramic rod. Metal caps are pressed over the rod. The ends of the resistive wire and the leads are connected to the caps by welding.

**SMF:** The resistor element is a metal film resistor consisting of a metal layer deposited over a high-grade ceramic rod. Metal caps are pressed over the rod. The leads are connected to the caps by welding.

For both SMW and SMF, the resistor body and lead ends are housed within a rectangular ceramic case which is non-flammable, will not melt even at high overloads and is resistant to most commonly used cleaning solvents, in accordance with MIL-STD-202, method 215 and IEC 60 068-2-45. A special version with a thermal fuse for surge and inrush current protection is available upon request.

STANDARD ELECTRICAL SPECIFICATIONS				
MODEL	POWER RATING $P_{70^\circ\text{C}}$ W	RESISTANCE RANGE <sup>(1)</sup> $\Omega$	TOLERANCE <sup>(2)</sup> %	E-SERIES Decade Values
SMW02	2	0.1 - 200	$\pm 5$	24
SMF02		220 - 47K		
SMW03	3	0.1 - 560		
SMF03		620 - 47K		
SMW05	5	0.1 - 560		
SMF05		620 - 47K		
SMW07	7 at 25 °C	0.1 - 1.5K		
SMF07		100 - 51K		
SMF10	10 at 25 °C	0.47 - 1.5K		

**Notes:**

<sup>(1)</sup> Special resistance values available upon request

<sup>(2)</sup> Other tolerances available upon request

TECHNICAL SPECIFICATIONS					
PARAMETER	UNIT	SMW	SMF02/ SMF03	SMF05	SMF07
Limiting Voltage	V	$\sqrt{P \times R}$	500	750	1000
Insulation Voltage	V	> 2000			
Temperature Coefficient <sup>(3)</sup>	ppm/°C	R < 10 $\Omega$ : 0 to + 600; R $\geq$ 10 $\Omega$ : - 80 to + 140	$\pm 250$		
Operating Temperature	°C	- 40 to + 200			
Short Time Overload	-	10 x rated power for 5 s			

**Note:**


<sup>(3)</sup> Temperature Coefficient of  $\pm 20, 30, 50$  or  $90$  ppm/°C available on request



DIMENSIONS in millimeters (inches)							
TYPE	W ± 0.1 (0.04)	D ± 0.1 (0.04)	H ± 1.5 (0.06)	B1 - B2	L	P	Ød
SMW02 SMF02	11.0 (0.43)	7.0 (0.28)	20.5 (0.81)	+ 0.9/- 0.3 (+ 0.04/- 0.02)	4.5 ± 1.5 (0.18 ± 0.06)	5.0 ± 1.0 (0.20 ± 0.04)	0.8 ± 0.03 (0.031 ± 0.002)
SMW03 SMF03	13.0 (0.51)	9.0 (0.36)	25.5 (1.01)	+ 2.3/- 0.3 (+ 0.09/- 0.02)	4.5 ± 1.5 (0.18 ± 0.06)	5.0 ± 1.0 (0.20 ± 0.04)	0.8 ± 0.03 (0.031 ± 0.002)
SMW05 SMF05	13.0 (0.51)	9.0 (0.36)	25.5 (1.01)	+ 2.3/- 0.3 (+ 0.09/- 0.02)	4.5 ± 1.5 (0.18 ± 0.06)	5.0 ± 1.0 (0.20 ± 0.04)	0.8 ± 0.03 (0.031 ± 0.002)
SMW07 SMF07	13.0 (0.51)	9.0 (0.36)	38.0 (1.49)	+ 2.3/- 0.3 (+ 0.09/- 0.02)	4.5 ± 1.0 (0.18 ± 0.04)	5.0 ± 1.0 (0.20 ± 0.04)	0.8 ± 0.03 (0.031 ± 0.002)
SMW10	16.0 (0.63)	10.0 (0.47)	35.0 (1.38)	+ 2.3/- 0.3 (+ 0.09/- 0.02)	4.5 ± 1.0 (0.18 ± 0.04)	7.5 ± 1.0 (0.30 ± 0.04)	0.8 ± 0.03 (0.031 ± 0.002)

**ELECTRICAL CHARACTERISTICS**


The power that the resistor can dissipate depends on the operating temperature.

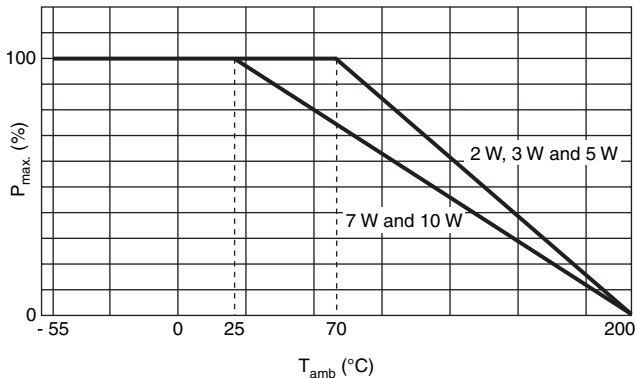

**DERATING**

Maximum dissipation ( $P_{max}$ ) in percentage of rated power as a function of ambient temperature ( $T_{amb}$ )

**APPLICATION INFORMATION**

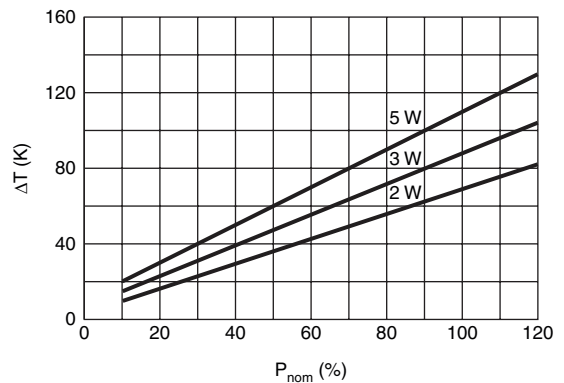

The temperature rise at the solder spot as a function of dissipated power

**Notes:**

- Application information available on request:
- Temperature rise of resistor body (hot spot) as a function of dissipation
- Pulse load behavior
- High frequency behavior (self inductance)



**MARKING**

The resistor is marked with the resistor type, the rated power, the nominal resistance value (R for values  $\Omega$  and K for values  $k\Omega$  is used as decimal point), the resistance tolerance and the production date (week and year), are printed in black on the resistor body.

Example:

PHX	SMW02
27R	5 %
204	2 W

ORDERING INFORMATION					
PRODUCT	TOLERANCE	ORDERING CODE	LEAD $\emptyset$ in millimeters (inches)	PACKAGING	QUANTITY (pieces)
SMW02	$\pm 5 \%$	2306 340 03xxx	0.80 (0.031)	BOX	500
SMF02		2306 345 03xxx			
SMW03		2306 341 03xxx			
SMF03		2306 346 03xxx			
SMW05		2306 342 03xxx			
SMF05		2306 347 03xxx			
SMW07		2306 343 03xxx			340
SMF07		2306 348 03xxx			210
SMW10		2306 344 03xxx			

**Last Digit of Ordering Code**

RESISTANCE DECADE	LAST DIGIT
0.1 - 0.91 $\Omega$	7
1 - 9.1 $\Omega$	8
10 - 91 $\Omega$	9
100 - 910 $\Omega$	1
1 - 9.1 $k\Omega$	2
10 - 91 $k\Omega$	3

The resistors have 12 digit ordering code starting with 2306. The next 5 digits indicate the resistor type and packaging, see table ORDERING INFORMATION.

The last 3 digits indicate the resistance value:

- The first 2 digits of these last 3 indicate the actual resistance value
- The last digit indicates the resistance decade in accordance with table "Last Digit of Ordering Code"

**Example:**

SMW02, 47  $\Omega$ ,  $\pm 5 \%$ , box of 500 pieces is **2306 340 03479**



NAFTA ORDERING INFORMATION					
PRODUCT	TOLERANCE	NAFTA ORDERING CODE	LEAD Ø in millimeters (inches)	PACKAGING	QUANTITY (pieces)
SMW02	± 5 %	SMW02WxxxxxJ	0.80 (0.031)	BOX	500
SMF02		SMF02WxxxxxJ			
SMW03		SMW03WxxxxxJ			
SMF03		SMF03WxxxxxJ			
SMW05		SMW05WxxxxxJ			
SMF05		SMF05WxxxxxJ			
SMW07		SMW07WxxxxxJ			340
SMF07		SMF07WxxxxxJ			
SMW10		SMW10WxxxxxJ			

Examples of the Ohmic Value

Value	5 DIGITS
1 Ω	1R000
10 Ω	10R00
100 Ω	100R0
1 kΩ	1K000
10 kΩ	10K00

The ohmic value in the NAFTA ordering code (see table NAFTA ORDERING INFORMATION) is represented by the "xxxxx" in the middle of the above ordering code. The table "Examples of the Ohmic Value" gives some examples on how to use these 5 digits.

**Example:**  
SMW02, 47 Ω, ± 5 %, box of 500 pieces is **SMW02W47R00J**

PACKAGING in millimeters (inches)				
PRODUCT	P	N	N	QUANTITY (pieces)
SMW02 SMF02	262 (10.3)	84 (3.3)	128 (5.1)	500
SMW03 SMF03				
SMW05 SMF05				
SMW07 SMF07				340
SMW10				210

**TESTS AND REQUIREMENTS**

Essentially all tests are carried out in accordance to the schedule of IEC publications 60115-1, category 40/200/56 (rated temperature range - 40 to + 200 °C; damp heat, long term, 56 days and along the lines of IEC publications 60068-2); "Recommended basic climatic and mechanical robustness testing procedure for electronic components" and under standard atmosphere conditions according to IEC 60068-1 subclause 5.3, unless otherwise specified.

In some instances deviations from IEC applications were necessary for our method specified.

<b>PERFORMANCE</b>				
<b>IEC 60115-1 CLAUSE</b>	<b>IEC 60068-2 TEST METHOD</b>	<b>TEST</b>	<b>PROCEDURE</b>	<b>REQUIREMENTS</b>
4.8		Temperature coefficient	Between - 40 °C and + 200 °C: SMW R < 10 Ω: R ≥ 10 Ω:  SMF	0 to 600 ppm/°C - 80 to + 140 ppm/°C  ± 250 ppm/°C
4.13		Short time overload	Room temperature; P = 10 x P <sub>n</sub> ; 5 s (voltage not more than 1000 V/25 mm)	$\Delta R/R_{\max.} \pm 2 \% + 0.1 \Omega$
4.15	-	Robustness of resistor body	Load 200 ± 10 N	No damage $\Delta R/R_{\max.} \pm 0.5 \% + 0.05 \Omega$
4.16	21(U)	Robustness of terminations:		No damage
4.16.2	21(Ua1)	Tensile all samples	Load 10 N; 10 s	
4.17	20(Ta)	Solderability (after ageing)	16 h at 155 °C; leads immersed in flux 600 for 2 ± 0.5 s in a solder bath at 235 ± 5 °C	Good tinning, (≥ 95 % covered) no damage
4.18	20(Tb)	Resistance to soldering heat	Thermal shock: 3 s, 350 ± 10 °C; 2.5 mm from body	$\Delta R/R_{\max.} \pm 0.5 \% + 0.05 \Omega$
4.19	14(Na)	Rapid change of temperature	30 min at - 40 °C and 30 min + 200 °C; 5 cycles	No damage $\Delta R/R_{\max.} \pm 1 \% + 0.05 \Omega$
4.22	6(Fc)	Vibration	Frequency 10 to 55 Hz, displacement 0.75 mm or acceleration 10 g, three directions; total 6 h (3 x 2 h)	No damage $\Delta R/R_{\max.} \pm 0.5 \% + 0.05 \Omega$
4.23		Climatic sequence:		
4.23.2	2(Ba)	Dry heat	16 h, + 200 °C	
4.23.3	30(Db)	Damp heat (accelerated) 1st cycle	24 h, 25 °C to 55 °C; 90 to 100 % RH	$\Delta R/R_{\max.} \pm 3 \% + 0.05 \Omega$
4.23.4	1(Aa)	Cold	2 h, - 40 °C	
4.23.6	30 (Db)	Damp heat (accelerated) remaining cycles	5 days; 25 °C to 55 °C; 90 to 100% RH	
4.24	3 (Ca)	Damp heat (steady state)	56 days; 40 °C; 90 to 95 % RH; loaded with 0.01 P <sub>n</sub>	$\Delta R/R_{\max.} \pm 3 \% + 0.1 \Omega$
4.25.1	-	Endurance (at 70 °C)	1000 h load with 0.9 P <sub>n</sub> ; 1.5 h ON and 0.5 h OFF	No visual damage $\Delta R/R_{\max.} \pm 5 \% + 0.1 \Omega$



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.