

0.197 ±0.008 $[5 \pm 0.2]$ 3 4 0.126 ±0.008 [3.2 ±0.2] 2 0.055 MAX. [1.40] 0.039 ±0.006 [1±0.15] 0.098 ±0.004 2.5 ±0.1 0.047 ±0.004 0.03 ± 0.004 1.2 ±0.1 $[0.8 \pm 0.1]$ **Bottom view**

Recommended Land Pattern

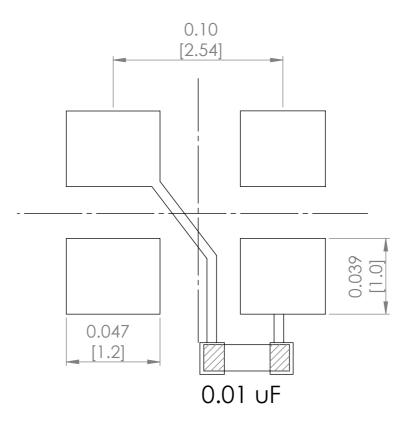

PIN	FUNCTION
1	Tri-state
2	GND
3	Output
4	VDD

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.

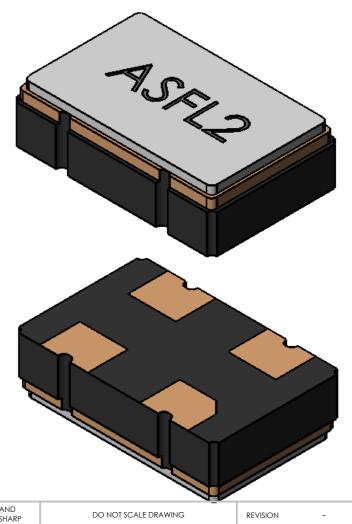

UNLESS OTHERWISE SPECIFIED: FINISH: DIMENSIONS ARE IN INCH(MM)			1 :			DEBUR AND BREAK SHARP	DO NO	DT SCALE DRAWING	REVISION	-	
SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:						EDGES	ABRACON				
	NAME	SIGNATURE DATE					CORPORATION				
DRAWN	SAAZVAT						30332 Esperanza, Rancho Santa margarita, California 92688				
CHK'D	XXXXXX										
APPV'D							OSCILLATOR				
MFG											
Q.A				MATERIAL:			DWG NO.			۸.2	
]				ASFL2		A3	
							AJILZ				
	WEIGHT:					SCALE:15:1	S	HEET 1 OF 1	-		