used for: D-SUB COMBINATION

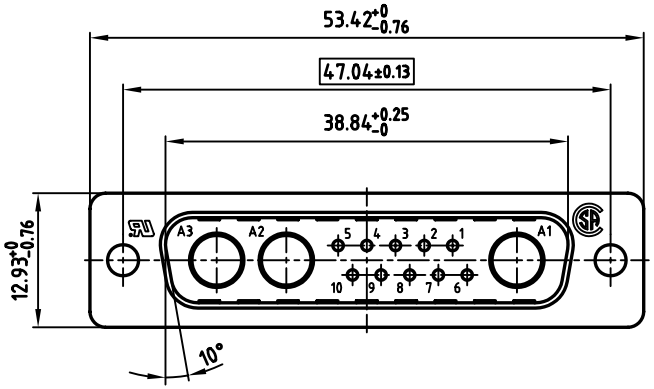

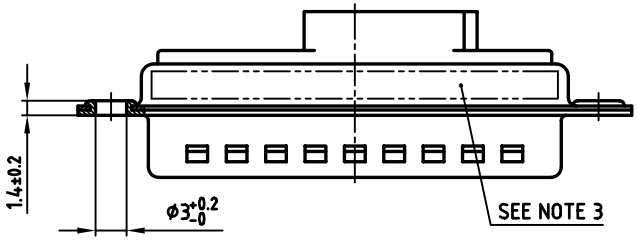



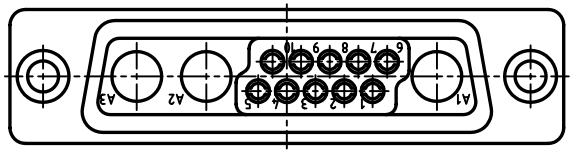

Directive 2002/95/EC „RoHS" Compliant

NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONNECTOR IS PART MARKED: 3013W3PXK99A10X CONEC Y/WW
4. [ ] = CRITICAL DIMENSION

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

	date	name
2002		
drawn	27.06.	Parei
appd.	27.06.	E. Mickenbecker
norm		
d-old		

scale: 2:1 (5:1)

material: SEE NOTES

title:

D-SUB COMBINATION MALE

13W3P CRIMP STYLE

dwg no: 13K1A630

AutoCAD 2000 | DIN-A 3 | sh: 1/1

part no: 3013W3PXK99A10X