

エ	G	п	m I		0
				_	



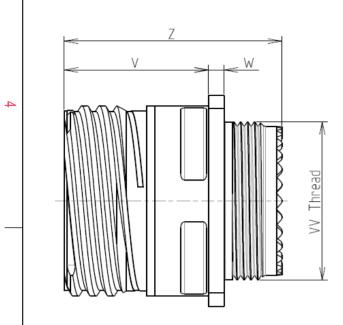

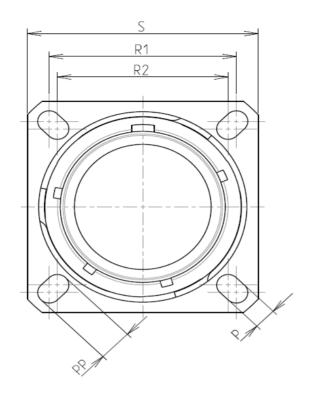

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				

: 11.9 g ± 10%

8D 0

G

11

Ζ

99

А


F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

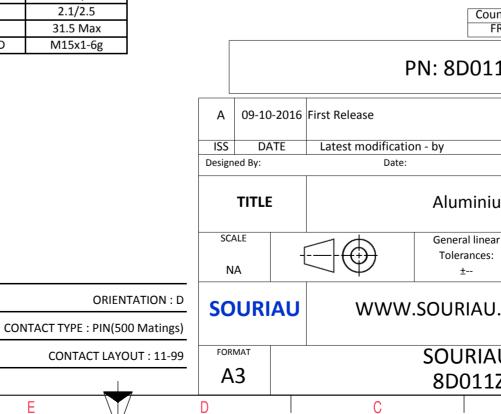

	ω		A		
		I			
					4
AS EXA	AMPLE				3
	non-conformit :h does not co				
er of the Parties or by a third party adation, technical notice.)					
untry FR	Jurisd	liction & Cont Not Listed	trol List		2
1Z99AD					
		CUSTOME	R DRAWING	MOD N°	
um Receptacle 8D series					
ar :			PROJECT		
			59	perty of	1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
UDRG N° SHEET					
Z9	9AD-C			1/2	J
	В		А		

		۵	н п	т		0
		Contact Layout				Panel Cutout
4	-×	$ \begin{array}{c} & & & \\ & & \\ & \oplus & & \\ & & \oplus & \\ & & & & \\ & & & \\ & & & \\ & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & $			٨	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Conta positiv ID A B C C D E F G Shell Arrangement Numb size no.	f consol f consol (mm) (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 130 (3.30) +.000 (0.00) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) +.000 (0.00) +.000 (0.00)]		¥ 	
ω	11 -99 7]			Dim ØA ØAA R1
						ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR
					A 09-10-20	PN: 8D011Z
					ISS DATE Designed By:	Latest modification - by Date:
					SCALE	Aluminium General linear
_						
						SOURIAU
	Н	G	F	E	A3 D	8D011Z9

