



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/18	





APPROVED: _____
DATE: _____ TITLE: _____

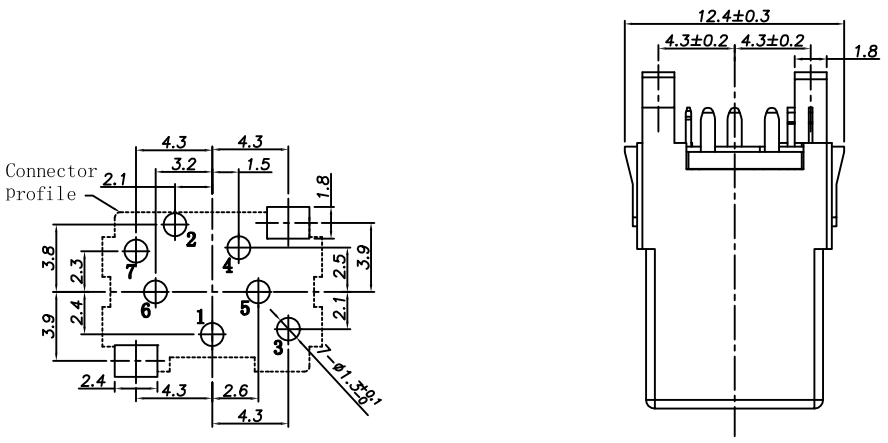


RECOMMENDED PCB LAYOUT (BOTTOM VIEW)

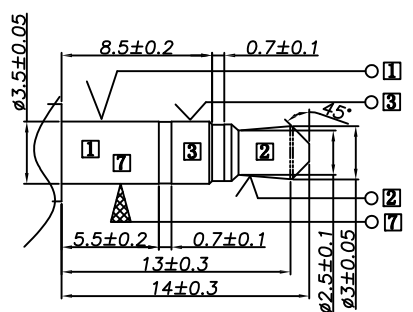

MATE PLUG

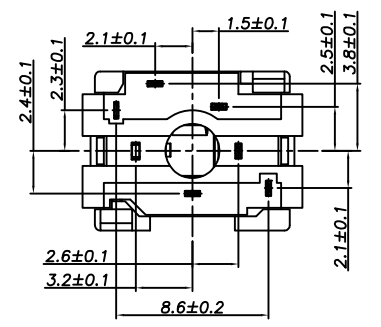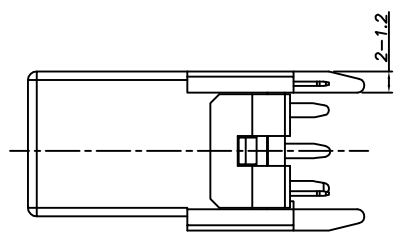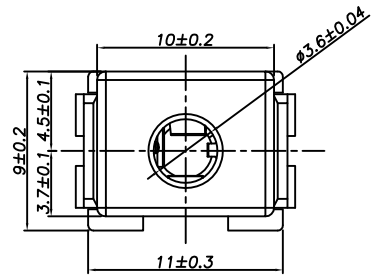

Schematic code

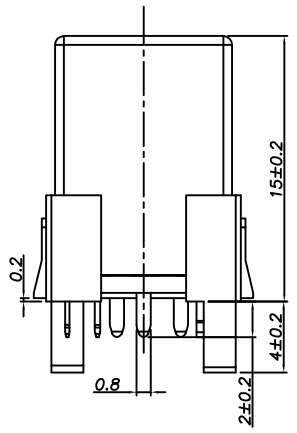

SPECIFICATIONS:
Material: Housing: Hi-Temp Thermoplastic, reated UL94V-0, Color: Black
Contacts: Copper Alloy
Plating: Tin over Copper underplate overall
Electrical:
Rating: 12VDC, 2A
Contact Resistance: 30 mohm max.
Insulation Resistane: 100 Mohm min. @ 500 VDC
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
Operating temperature: -20°C to +70°C
Environmental:
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED MM ANGLE		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
± 0.30		± 2°		TITLE: 3.5MM STEREO PHONE JACK, VERTICAL	
APPROVALS		DATE		SIZE: X PART NO.: ASJ-197-U-HT REV.: -	
DRAWN	HR	11/16/18		REF: S00002C SCALE: NTS SHEET 1 OF 1	
CHECKED	AC1	11/16/18			
APPROVED					