

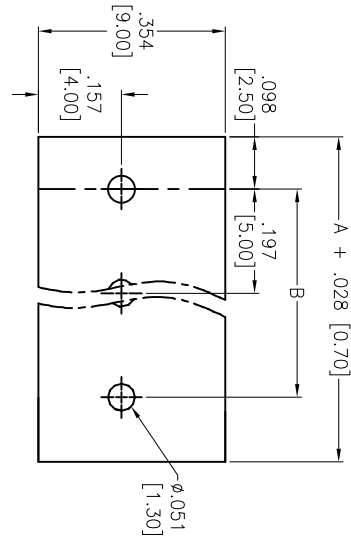



| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|----------|------|
| - | | RELEASED | 05/10/12 | |

APPROVED: _____
 DATE: _____ TITLE: _____

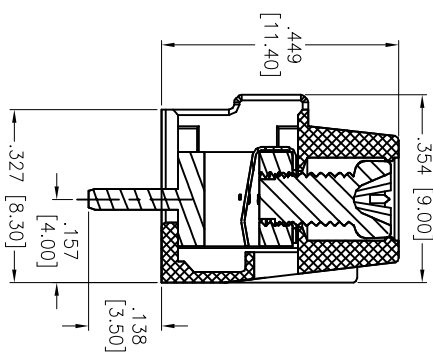

RECOMMENDED PCB LAYOUT

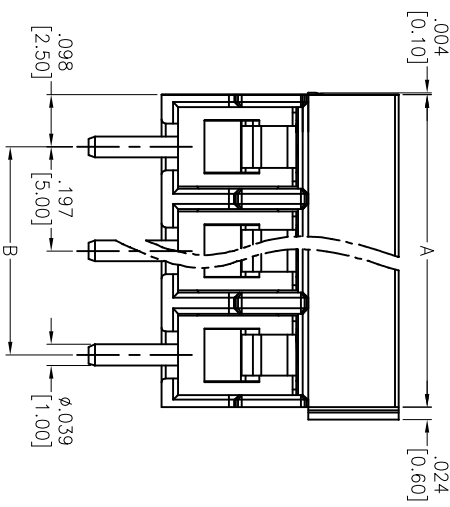

SECTION A-A

Positions: 02 thru 24
 A = .197 [5.00] x No. of Positions
 B = .197 [5.00] x No. of Spaces

| Dim | A | Dim | B |
|--------|--------------|--------------|---|
| 2-6P | ±.006 [0.15] | ±.004 [0.10] | |
| 7-12P | ±.008 [0.20] | ±.008 [0.20] | |
| 13-18P | ±.012 [0.30] | ±.010 [0.25] | |
| 19-24P | ±.016 [0.40] | ±.012 [0.30] | |

SPECIFICATIONS:

- Material: Insulator: PA66, rated UL 94V-0
- Insulator color: Green
- Wire guard: Stainless Steel
- Contact: Brass, Tin plated
- Screw: Steel, M2.6/Zn Plated
- Electrical: Operation voltage: 300 VAC
- Current rating: 10 Amps
- Withstanding Voltage: 1.6KV
- Mechanical: Solid wire (AWG): 12-26
- Stranded wire (AWG): 12-26
- Torque(Lb-In): 3.5
- Wire strip length (mm): 5-6
- Temperature Rating: Operating temperature: -40°C to +115°C
- Environmental: Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .197 [5.00] PITCH

| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] | | TOLERANCES EXCEPT AS NOTED | |
|--|------------|----------------------------|--------------|
| INCHES | HOLES | INCHES | HOLES |
| .X ±.10 | ØX ±.10 | .XX ±.020 | ØXX ±.015 |
| .XXX ±.015 | ØXXX ±.010 | | |
| APPROVALS | | DATE | |
| DRAWN | TW | 05/10/12 | |
| CHECKED | AY | 05/10/12 | |
| APPROVED | | | |
| TITLE | | SIZE | PART NO. |
| VERTICAL | | X | EB133-XX-C |
| REF: S00007T | | SCALE: NTS | SHEET 1 OF 1 |