

12...15 V / 40 W

PULS

SL2.103



Data sheet

- Input: AC 230V / 115 V, DC 160-375 V
- Output: 12...15 VDC / 40 W
- High overload current, no switch-off
- Robust mechanics and EMC

Datasheet

Input

Input voltage AC100-120/220-240 V (switchable), 47-63 Hz (85-132 VAC / 176-264 VAC, 160-375 VDC, see also „Output: Continuous Loading“)

Note: At DC input, always leave the switch in the 230V position.

Input current < 0.9 A (switch in 115V position)
< 0.5 A (switch in 230V position)

DC input current typ. 5.3 mA at 110 VDC, 3.9 mA at 300 VDC (preserves battery sources)

Inrush current typ. < 25 A at 264 V AC and cold start

To be fused with a 10A, B-type 'circuit-breaker' switch based on the usual thermomagn. overload sensing principle (used anyway to fuse the input lines). In addition, the unit contains an internal fuse (not accessible).

Transient handling Transient resistance acc. to VDE 0160 / W2 (750 V / 1.3 ms), for all load conditions.

Hold-up time > 60 ms at 196 VAC, 12 V / 36 W

Efficiency, Reliability etc.*

Efficiency typ. 85 % (230 VAC, 12 V / 36 W)

Losses typ. 8.2 W (230 VAC, 12 V / 36 W)

MTBF 680.000 h acc. to Siemensnorm SN 29500 (12 V / 3 A, 230 VAC, $T_{amb} = +40^{\circ}\text{C}$)

Life cycle (electrolytics) The unit exclusively uses longlife electrolytics, specified for +105°C (cf. 'The SilverLine', p.2).

Output

Output voltage 12...15 V DC, adjustable by (covered) front panel potentiometer; preset: 12 V $\pm$ 0.5% Adj. range guaranteed

Output noise suppression Radiated EMI values below EN 61000-6-3, even when using long, unscreened output cables.

Ambient temperature range T_{amb} Operation: -10°C...+70°C (>60°C: Derating)
Storage: -25°C...+85°C

Continuous loading (at $T_{amb} = -10^{\circ}\text{C}$...+60°C, convection cooling), see also diagram overleaf. For start at $T_{amb} < 0^{\circ}\text{C}$ and low input voltage, please contact PULS.	Switch AC/DCin	I_{out} @ 12V	I_{out} @ 15V
230V	176-264 V =	3.0 A	2.7 A
	210-375 V =	3.0 A	2.7 A
	160-210 V =	2.0 A	1.8 A
115V	85-132 V =	3.0 A	2.7 A

Output protected against short circuit, open circuit and overload

Derating typ. 1.5 W/K (at $T_{amb} = +60^{\circ}\text{C}$...+70°C)

Voltage regulation better than 2% V_{out} overall

Ripple / Noise < 25 mV_{pp}, (20 MHz bandw., 50 Ω measurem.)

Overvolt. protection typ. 21 V, max. 25 V

Parallel operation Yes, current sharing on request

Power back immunity 20 V

Front panel indicator Green LED

Start / Overload Behaviour

Startup delay typ. 0.1 s

Rise time ca. 5-20 ms, depending on load

Overload Behaviour

- Special PULS Overload Design (see diagram overleaf)
 - no disconnection, no hiccup if overloaded
 - high overload current (up to 1.5 I_{Nom}). V_{out} is gradually reduced with increasing current.

Advantages:

- High short-circuit current, giving large 'start-up window': unit starts reliably even with awkward loads (DC-DC converters, motors).
- No 'sticking' which can occur with fold-back characteristics
- Secondary fuses operate reliably

Order information

Order number	Description
SL2.103	
SLZ01	(Screw mounting set, two needed per unit)

Construction / Mechanics*

Housing dimensions and Weight

- W x H x D 49 mm x 124 mm x 102 mm (+ DIN rail)
- Free space for ventilation above/below 25 mm recommended
right 10 mm recommended (front view)
- Weight 460 g

Design advantages:

- All connection blocks are easy to reach as mounted at the front panel.
- Input and output are strictly apart from each other and so cannot be mixed up (input below, output above).

* For further information see data sheets „The SilverLine“, „SilverLine Family Branches“ and mechanics data sheet


For further information, especially about

- EMC
 - Connections
 - Safety, Approvals
 - Mechanics und Mounting,
- see page 2 of the „The SilverLine“ data sheet.


For detailed dimensions

see SilverLine mechanics data sheet SL2.5/ SL5/ SL10


Efficiency (min.)

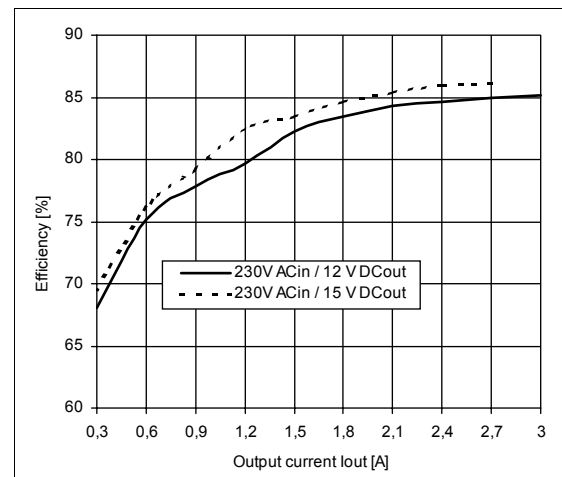

Output characteristic (min.)

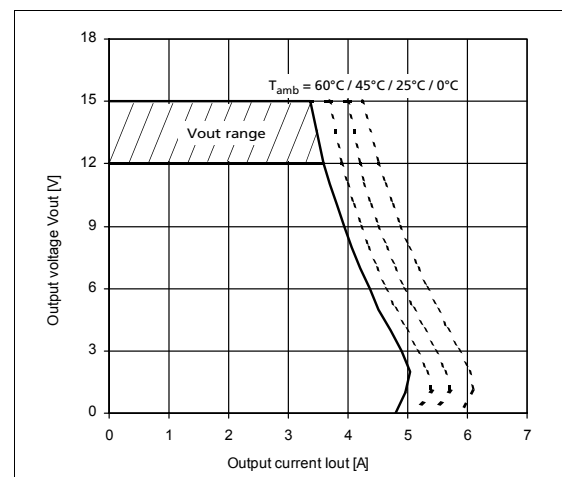

Hold-up time (min., at V_{out}=12V)

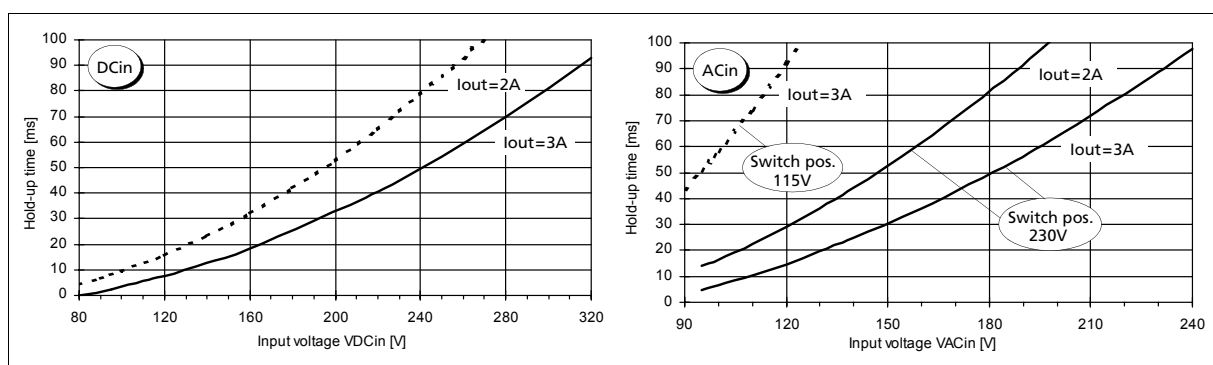

Unless otherwise stated, specifications are valid for AC 230V input voltage, +25°C ambient temperature, and 5 min. run-in time. They are subject to change without prior notice.

Your partner in power supply:



European
Power Supply
Manufacturers
Association



Bayerns Best 50
Czech 100 Best
Europe's 500

PULS GmbH

Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com


SL2.5/ SL5/ SL10

- Innovative DIN-Rail mount, unit holds even at vibration or lateral pressure
- Clearly arranged and user oriented
- Large, robust screw terminals
- Sealed metal housing
- Fine ventilating grid




Data sheet


Side view SL2.5

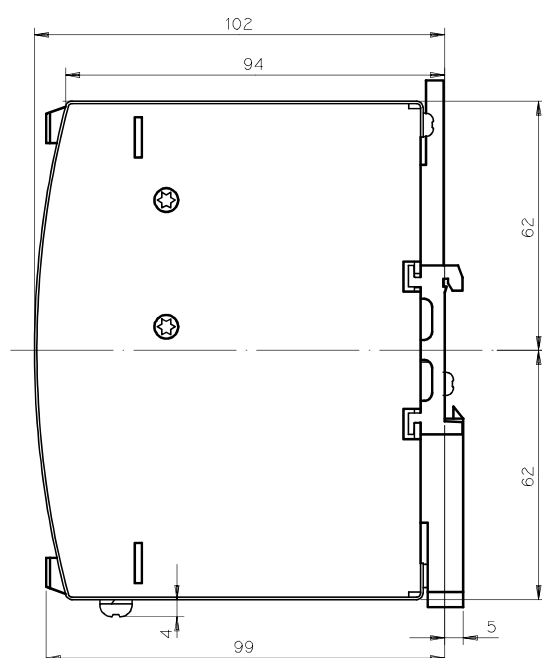

Front view SL2.5

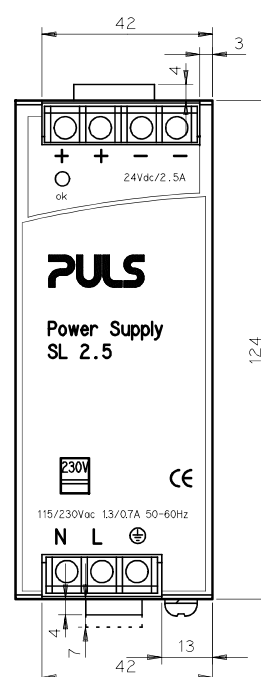

Bottom view SL2.5

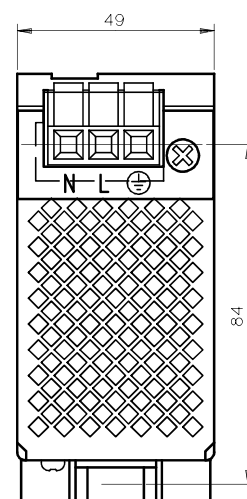

Construction / Mechanics

Housing dimensions and Weight			Free space for ventilation		
Unit	W x H x D [mm]	weight	left	above/below right	
• SL2.5	49 x 124 x 102	460 g	0 mm	25 mm each	10 mm
• SL5.10x	64 x 124 x 102	620 g	15 mm	25 mm each	15 mm
• SL5.300	73 x 124 x 117	730 g	15 mm	50 mm each	15 mm
• SL10	120 x 124 x 102	980 g	15 mm	25 mm each	15 mm

Overall depth = depth value as mentioned + DIN rail depth

Robust metal housing with fine ventilat. grid (◇ 3,5 mm, IP20), to keep out small parts (e.g. screws)


Mounting	on DIN-Rail (TS35/7.5 or TS35/15, 1...1.5 mm thick), thus
	• Simple snap-on system • Sits safely and firmly on the DIN-Rail • No tools required to remove
or backplane-mounted	(two optional screw mounting sets SLZ01 required)

Connections



Connections	
• Input/Output	Screw terminals, connector size range: solid 0.5- 6 mm ² / flexible 0.5- 4 mm ²
• Current handling capacity	30 A per output
• Grid	Two connectors per output, 9 mm distance between adjacent connectors
Design advantages:	
• All connection blocks are easy to reach as mounted at the the front panel. • Input and output are strictly apart from each other and so cannot be mixed up	

Order information



Order number	Description
SL2.100	24V/2.5A
SL2.103	12-15V/40W
SL5.100	24V/5A
SL5.102	24-28V/120W
SL5.105	24-28V/120W
SL5.300	24-28V/120W, 3AC400-500V input
SL10.100 and SL10.105	24-28V/240W
SL10.101	48-56V/240W
SLZ01	Screw mounting set, two needed per unit

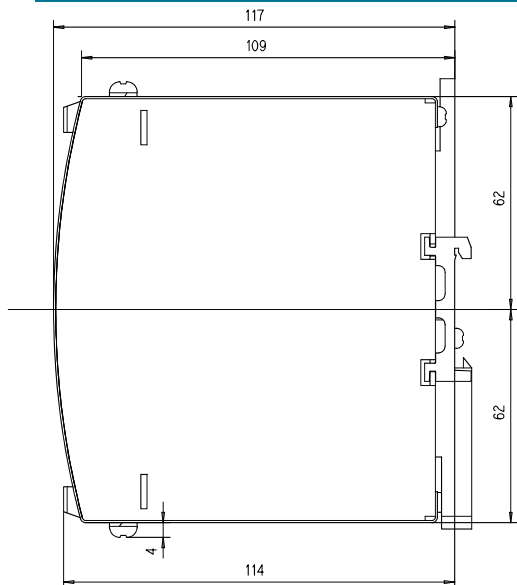




All views SL5.300

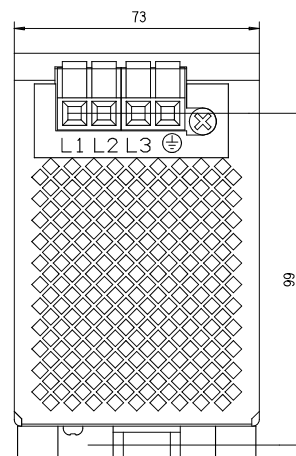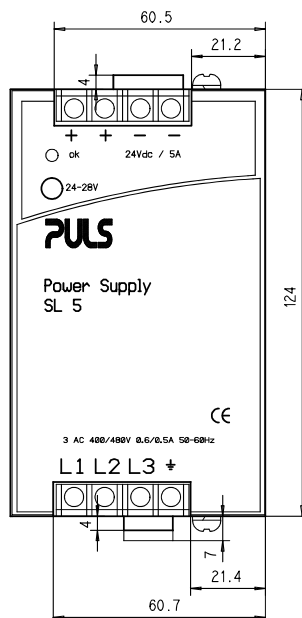

**Bottom view
SL10 SL5.10x**

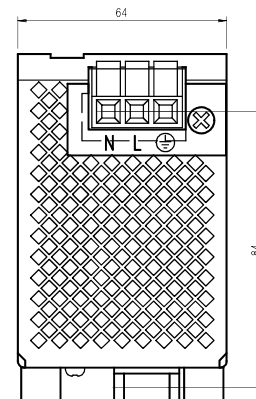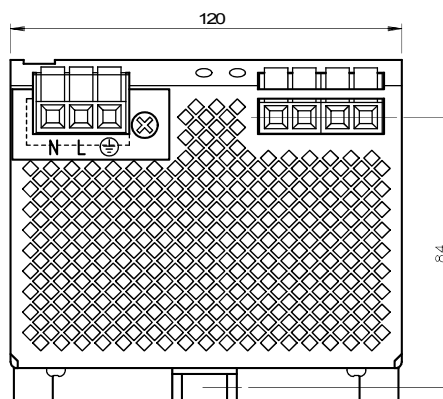

**Side view and front view
SL10, SL5.10x**

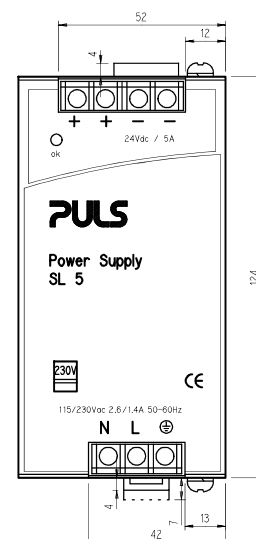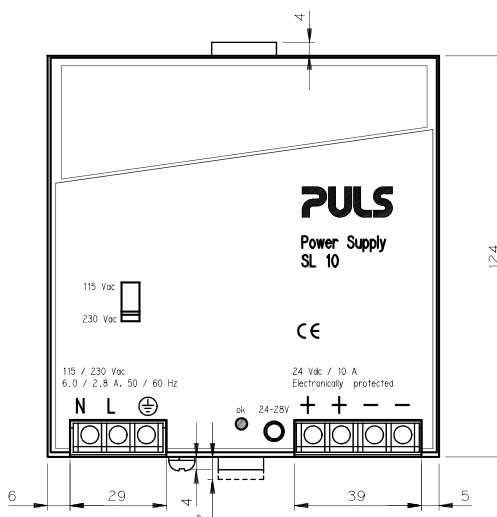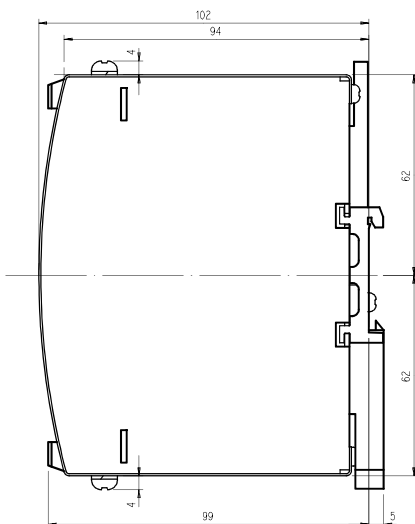

his 'mechanics data sheet' exclusively deals with the mechanical properties of the product. For further information (especially concerning electrical properties), please refer to the generic data sheet of the SL2.5, SL5 and SL10 and to the basic data sheet „The SilverLine“ dealing with common features of all SilverLine units. This data sheet is subject to change without prior notice.

Your partner in power supply:



Bayerns Best 50
Czech 100 Best
EuropeOs 500

PULS GmbH

Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com