

REV. 3  
DCO 102710

.050 ± .002  
DIA. PINS  
GOLD PLATED


COIL: @ 25°C	
RESISTANCE	300 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	7.0 VDC MAX, 2.3 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE & RELEASE 15 MS MAX.
	OPERATE BOUNCE 5 MS MAX
	RELEASE BOUNCE 5 MS MAX.

CUST. QPL  
CUST. NO. M5757/23-004 REV. \_\_\_\_\_

"07" RELAY

CUSTOMER DATA SHEET

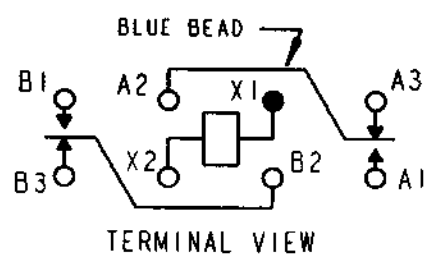

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 Hz RESISTIVE
	50,000 OPERATIONS

DR. RB 8/6/93 | CK. TLG 8-17-01

**CII Technologies**  
advanced control electronic solutions

B07D934BC2-0052