

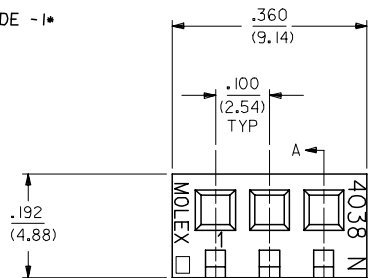


OPTION CODE -1\*

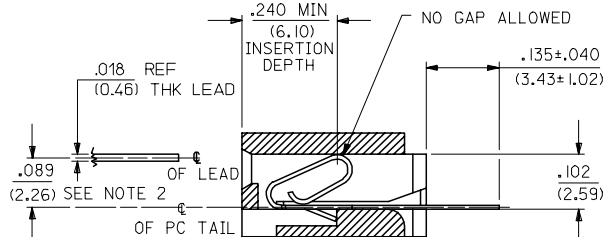


CKT NO 1

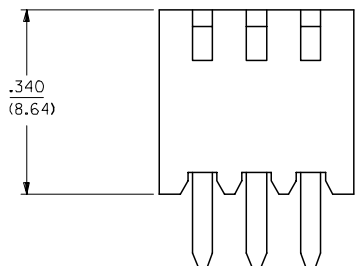

SECTION A-A


NOTES:

1. MATERIAL: GLASS FILLED POLYESTER 94V-0 COLER WHITE.
2. PLATINGS:  
P909 - HOT TIN DIP: .000100/(0.00254) MIN.  
\* THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN/LEAD PLATING.
3. PRODUCT SPECIFICATION: NONE
4. PACKAGING: BULK
5. TERMINAL TO HOUSING RETENTION FORCE: 3 LBS. MIN.
6. CONNECTORS ARE NOT STACKABLE ON .100/(2.54) CENTERS.
7. TERMINALS CONFORM TO SOLDERABILITY SPECIFICATION SMES-152.
8. .085/(2.16) DIM. WILL VARY DEPENDING ON LEAD THICKNESS.


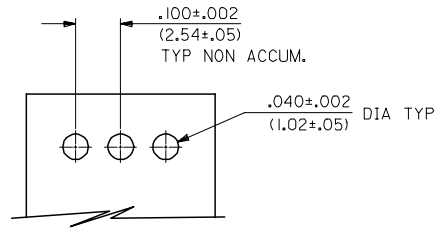


RECOMMENDED PC BOARD LAYOUT

OPTION CODE -2\*



CKT NO 1

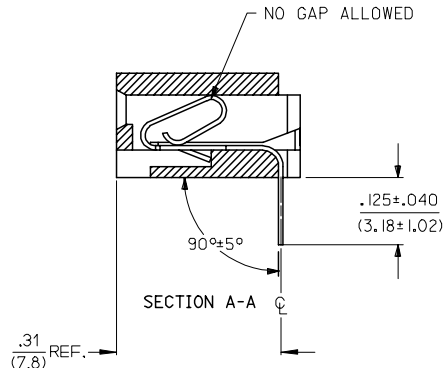

SECTION A-A

4038-N \*  
ASSEMBLY OPTION CODE  
1= STRAIGHT  
2= RIGHT ANGLE  
TERMINAL SEE CHART

2	D
1	D1
SHT. REV.	

ADD DIMENSION EC NO: UCP2007-0731 DRAWN: P. DDER 2006/09/29 CHKD: ADERR 2006/10/03 APPR: FSM TH 2006/10/17 D1	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES ± .010	± .010	DRAWN BY	DATE	TITLE TRANSISTOR SOCKET ASSY 4038 SERIES DWG.				
		3 PLACES ± .014	± .014	CHECKED BY	DATE	MOLEX INCORPORATED				
		2 PLACES ± 0.25	± .014	APPROVED BY	DATE	SDA-4038				
1 PLACE ± 0.36	± .014	LENZ	1992/01/10	MATERIAL NO. SEE CHART		DOCUMENT NO. SDA-4038		SHEET NO. 1 OF 2		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±1/2°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

