


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|---|------|-----------------|
| 1 | TLY-1P | NEMA 1-15P, polarized | 1 | white overmold |
| 2 | 30-00243 | 2C, 18 AWG, UL SPT-1, 300V, 105C, 5.55 mm, VW-1, PVC, white | 1 | |

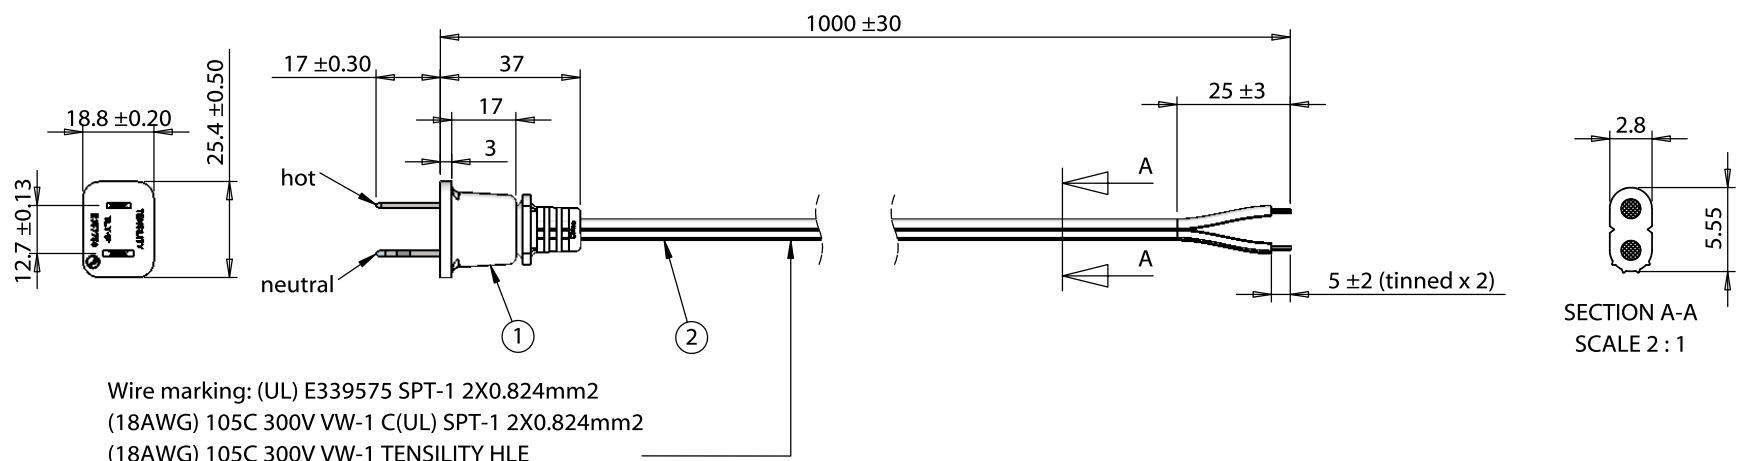

| Wiring Diagram | |
|----------------|--------|
| TLY-1P | wire |
| hot | smooth |
| neutral | ribbed |

Notes:
 Electrical requirements: 10 A at 125 Vac as is

| | | | | | |
|-----------|------------|-----------------|--|---|---|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 12/17/2012 | Initial release | AG <small>Digitally signed by AG Date: 2017.01.26 16:14:24 -08'00'</small> | RoHS compliant | |
| | | | Verified: PS <small>Digitally signed by PS Date: 2017.01.26 16:15:24 -08'00'</small> | Function test: no open, no short circuit, no intermittent | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Ac cord, 1000 mm, U.S, NEMA 1-15P plug, TLY-1P to tinned, 18 AWG, SPT-1 wire, 30-00243, white | |
| | | | | Size: | Part number: |
| | | | | A | 11-00032 |
| | | | | Scale: 1:2 | Sheet 1 of 1 |