

1

2

3

4


5

6

7

length


A

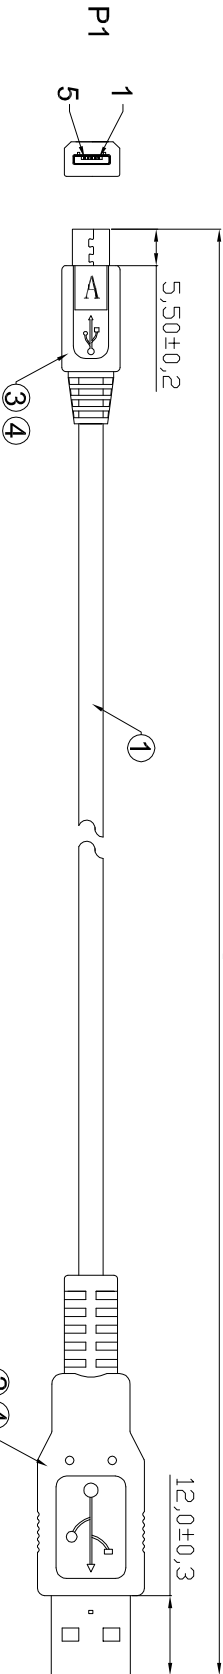

A

B

B



Cable White print
AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
AWM I/II A 80°C 30V FT1 USB CABLE

C

C


D

WSW P/N	Jacket color	Length(mm)
AK67321-0.5	Black	500±15
AK67321-1	Black	1000±20
AK67321-2	Black	2000±20
AK67321-3	Black	3000±30
AK67321-5	Black	5000±50

- Electrical test:**
1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 10Mohm min.
 4. Dielectric test: DC 300V

D

E

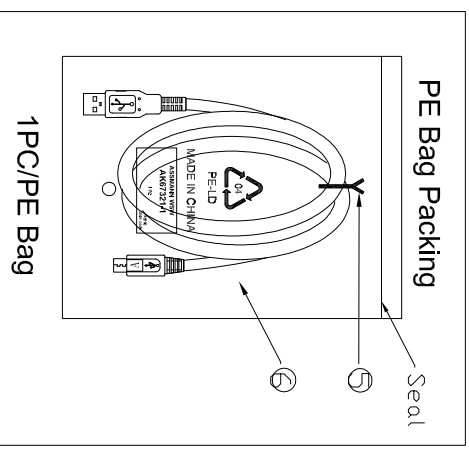

PIN ASSIGNMENT	
P1	P2
1 Red	1
2 White	2
3 Green	3
4+5 Black	4
Shell Drain+Braid	Shell

E

F

NO.	NAME	QTY	DATE	NAME
①	PE Bag	1		Clear Print black "MADE IN CHINA"+ "1PC"
②	TIE	1		Black
③	Out Jacket	NA		Black PVC-45P
④	CONN	1		Micro USB 5P A Male Shell:Nickel Pin:G/F Insulator color: Black solder type
⑤	CONN	1		USB 2.0 A Male Shell:Nickel Pin:G/F Insulator color: White solder type
⑥	Cable	1		USB 2.0 UL2725 (28#*1P+AL)+28#*2C+AEB Black OD:3.5mm

F

G

RoHS compliant
 Unit: mm

Scale	Free	Customer-No.
TOLERANCE		
DIM	TOL	
Angle	TOL	

G

H

Id.	Modification	Date	Name
①	Drawn	21.03.2016	Amy

H

1

2

3

4

5

6

7



Drawing-No. **ASS 7590 CA**
 rev00

Customer-No. **ASSMANN WSW-No. AK67321-X**

H