


- PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- 0.00381 MIN MATTE TIN LEAD PLATE OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 0.00381 MIN MATTE TIN PLATE OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

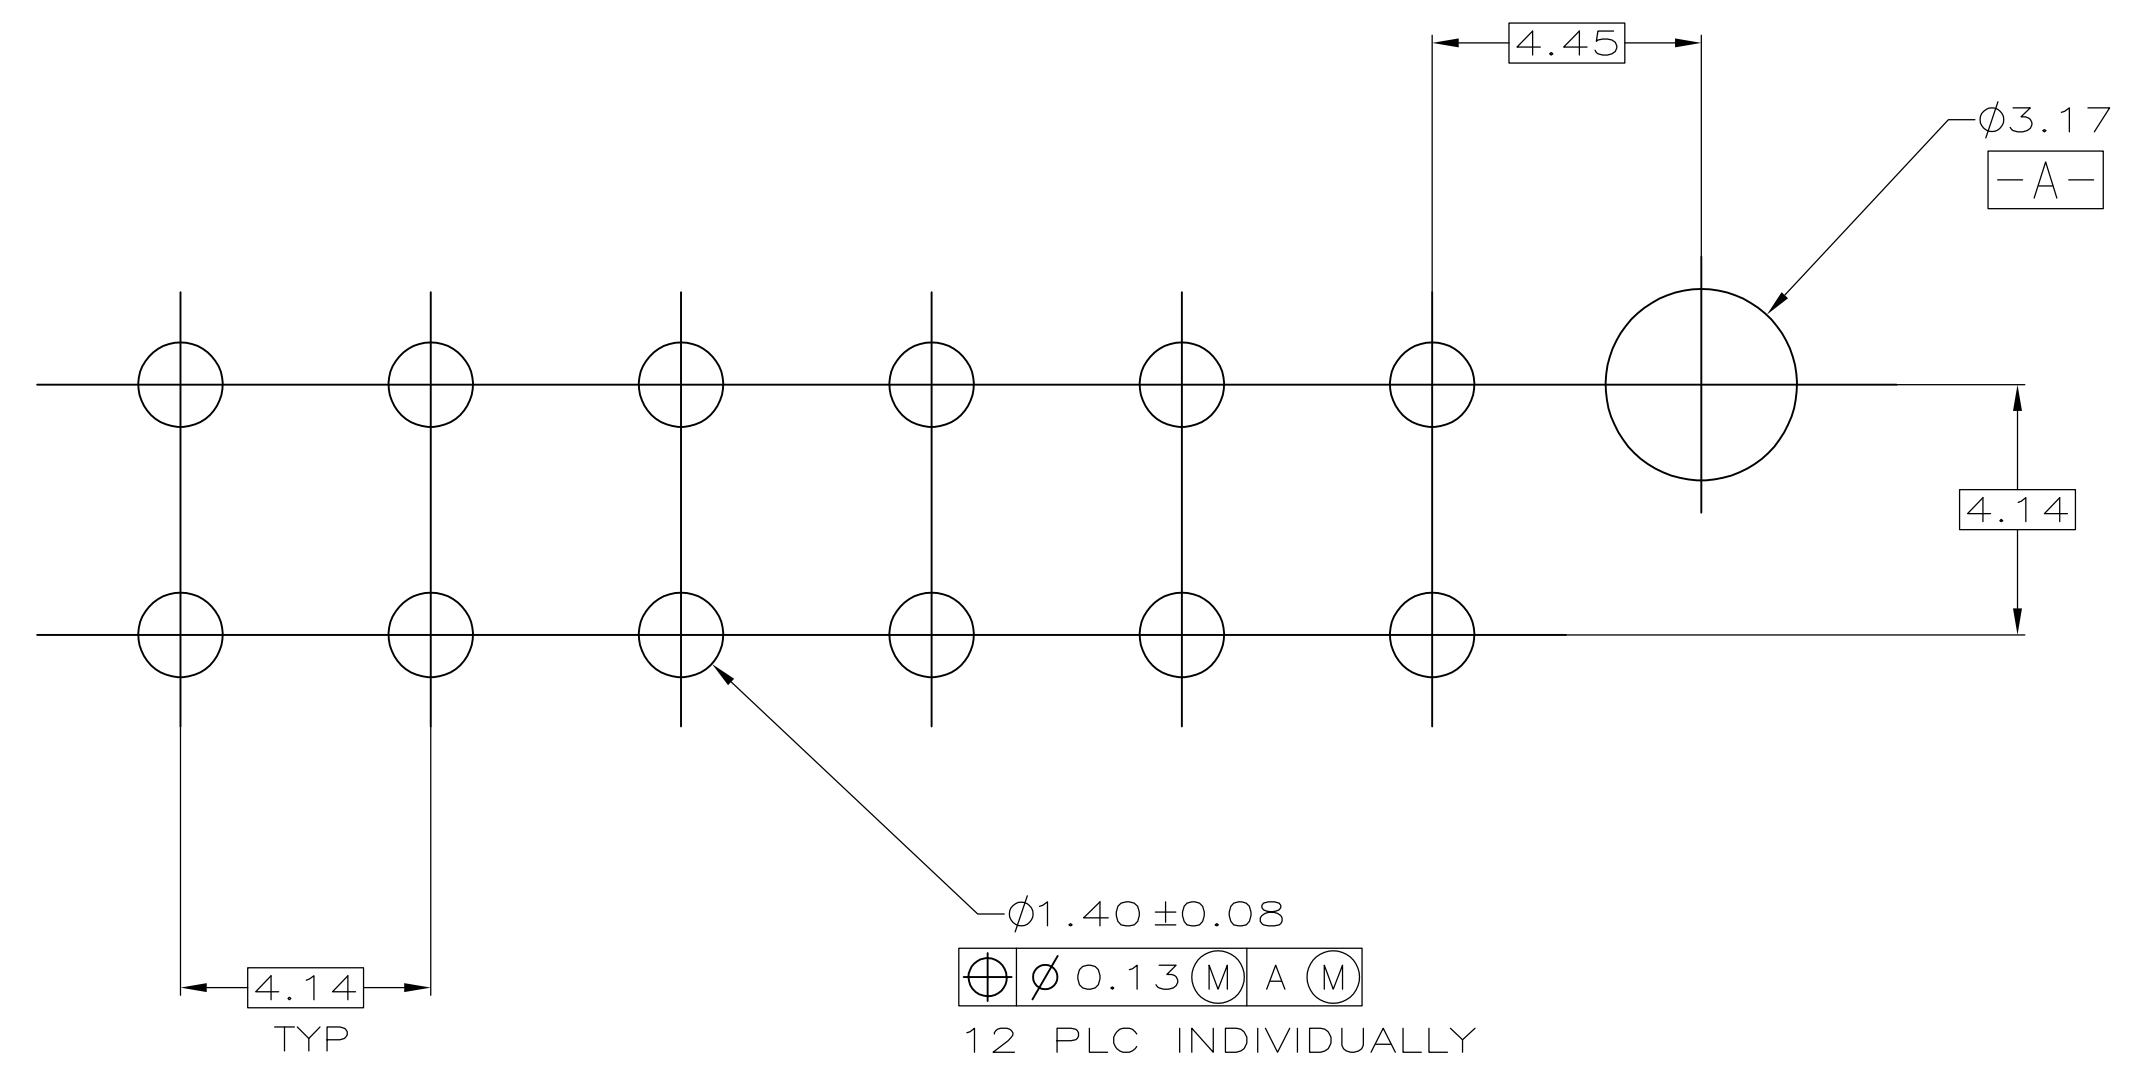

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 THICK P.C. BOARD

OBSOLETE	BRASS, GOLD	NYLON, 94V-0, WHITE	1-794066-1
	BRASS, TIN	NYLON, 94V-0, WHITE	1-794066-0
	BRASS, GOLD	NYLON, 94V-0, WHITE	-794066-2-
	BRASS, TIN LEAD	NYLON, 94V-0, WHITE	-794066-1-
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN K WHITAKER 6-12-95	CHK R SWING 6-12-95	APVD R ORSTAD 6-13-95	NAME
0 PLC ± -	1 PLC ± -				PRODUCT SPEC
2 PLC ± 0.13	3 PLC ± -				APPLICATION SPEC
4 PLC ± -	ANGLES ± -				SIZE
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SCALE	8:1	SHEET 1 OF 1
CUSTOMER DRAWING		00779	794066		REV D1

STE TE Connectivity  
 HEADER ASSEMBLY, 12 CIRCUIT, DOUBLE ROW VERTICAL, MINI-UNIVERSAL MATE-N-LOK