
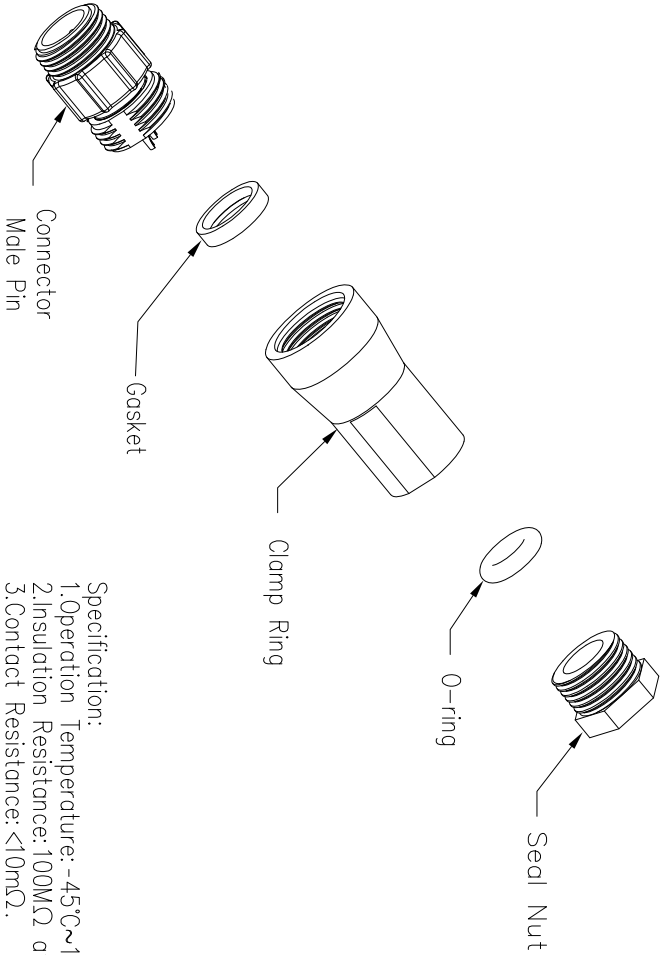




REV.	EN. NO.	DESCRIPTION	SIGN.	DATE
C1	N/A	INITIAL DRAWING	Victory	2019/08/22

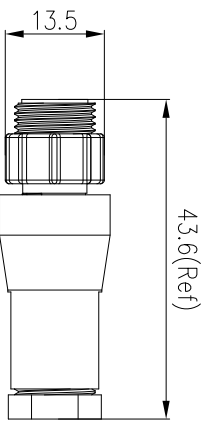

2 Pin	P/N: 21002311-01	P/N: 21003311-01	P/N: 21004311-01
3 Pin			
4 Pin			

21XXX311-01
Pin Number

Pin Assignments Front View



DESCRIPTION Mini Series Screw Type
Female Plug With Male Pin

UNIT: mm	SCALE: 1:1	SHEET: 1 OF 1
TOLERANCE .X .XX .XXX ANGLES	±0.25 ±0.15 ±0.05 ±1°	REV: C1 SIZE: A4 * Inspection Item

- Specification:
1. Operation Temperature: -45°C~105°C.
 2. Insulation Resistance: 100MΩ at DC 500V.
 3. Contact Resistance: <10mΩ.
 4. Withstand Voltage: 1500V AC.
 5. Operating Current: 5A.
 6. Operating Voltage: AC 110V.
 7. Waterproof Rate: IP67(Mated).
 8. Connector: Nylon+GF, Black.
 9. Seal Nut: Nylon, Black.
 10. O-Ring: Silicon, Red.
 11. Clamp Ring: Nylon, Black.
 12. Gasket: Silicon, Red.
 13. Male Pin: Copper Alloy, Gold Plated.
 14. RoHS Compliant.
 15. UL Compliant.
 16. Cable Range OD: φ4.7mm~6.2mm
 17. Mating Cap P/N: 806-00028-00.

CHOGORI

PART NO	21XXX311-01	DRAWN BY	Victory	DATE	2019/08/22
---------	-------------	----------	---------	------	------------

DWG NO		CHECKED BY	Ivan	DATE	2019/08/22
--------	--	------------	------	------	------------

CUSTOMER		APPROVED BY	Ponson	DATE	2019/08/22
----------	--	-------------	--------	------	------------