

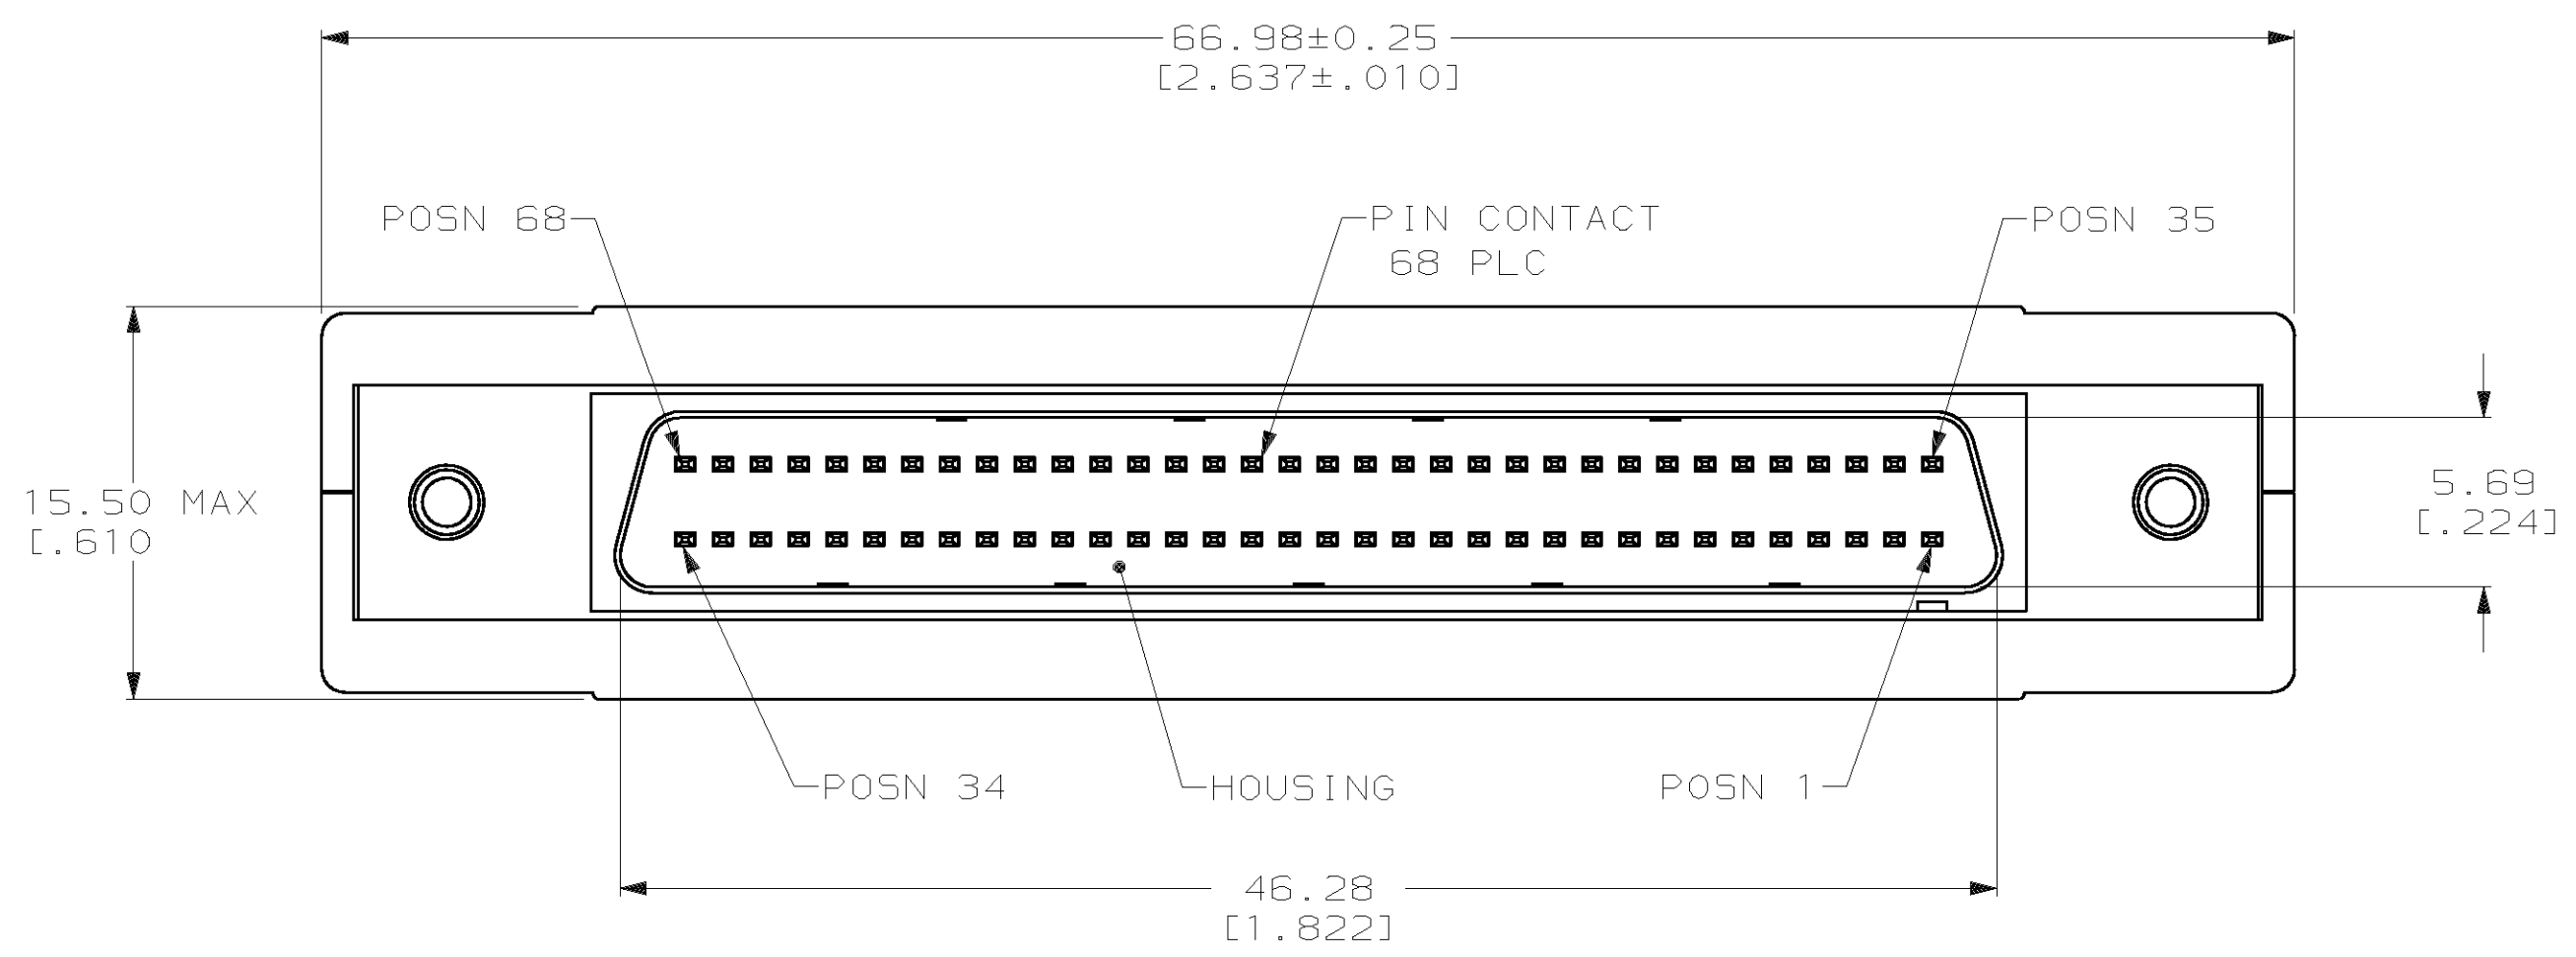
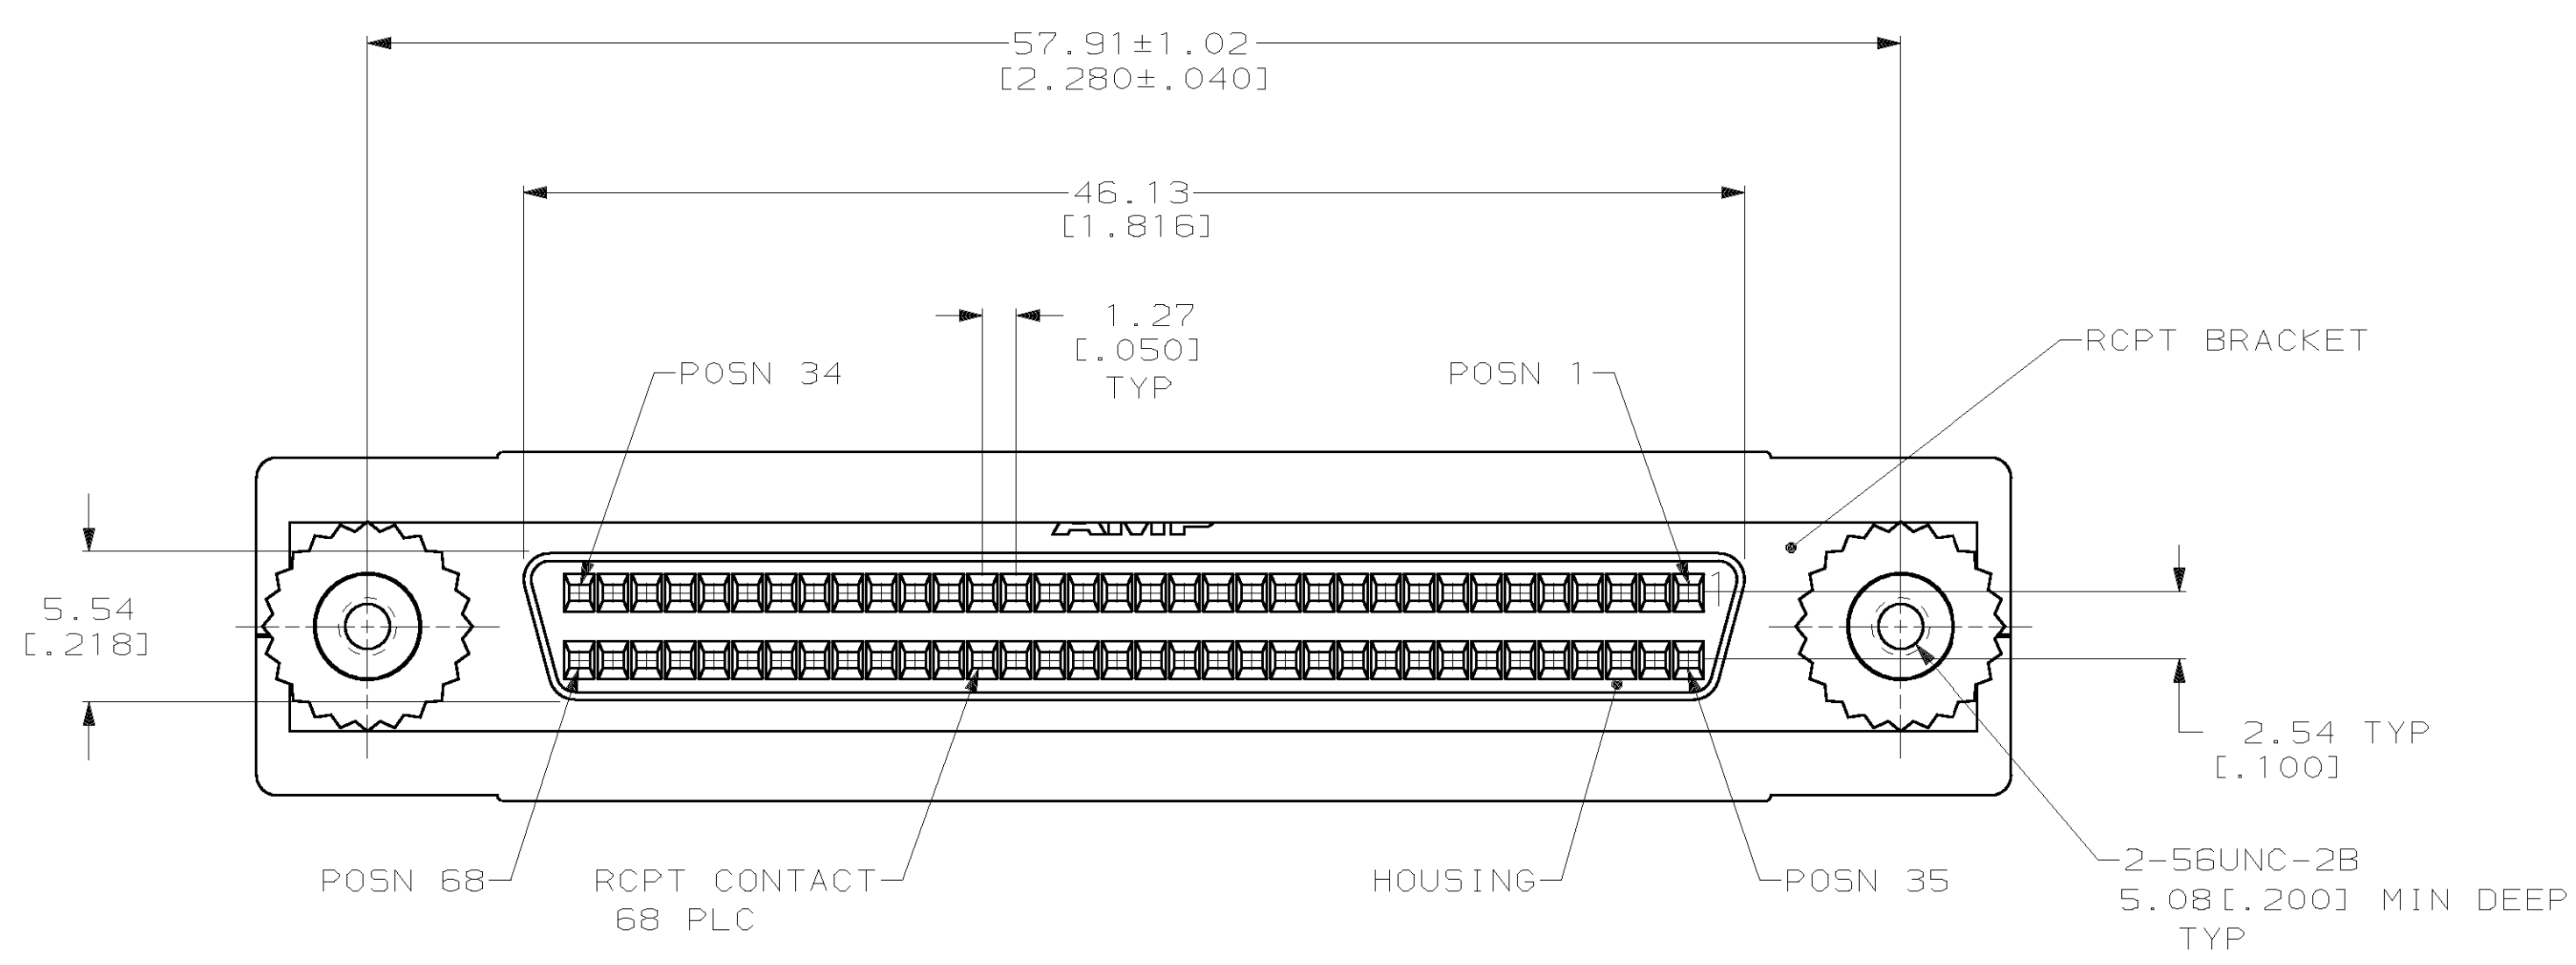


LOC		DIST		P		ZONE		LTR		REVISIONS			
BD	62									DESCRIPTION	DATE	APPD	
										F	REVISED PER EC 051A-0043-99	23AUG99	JG

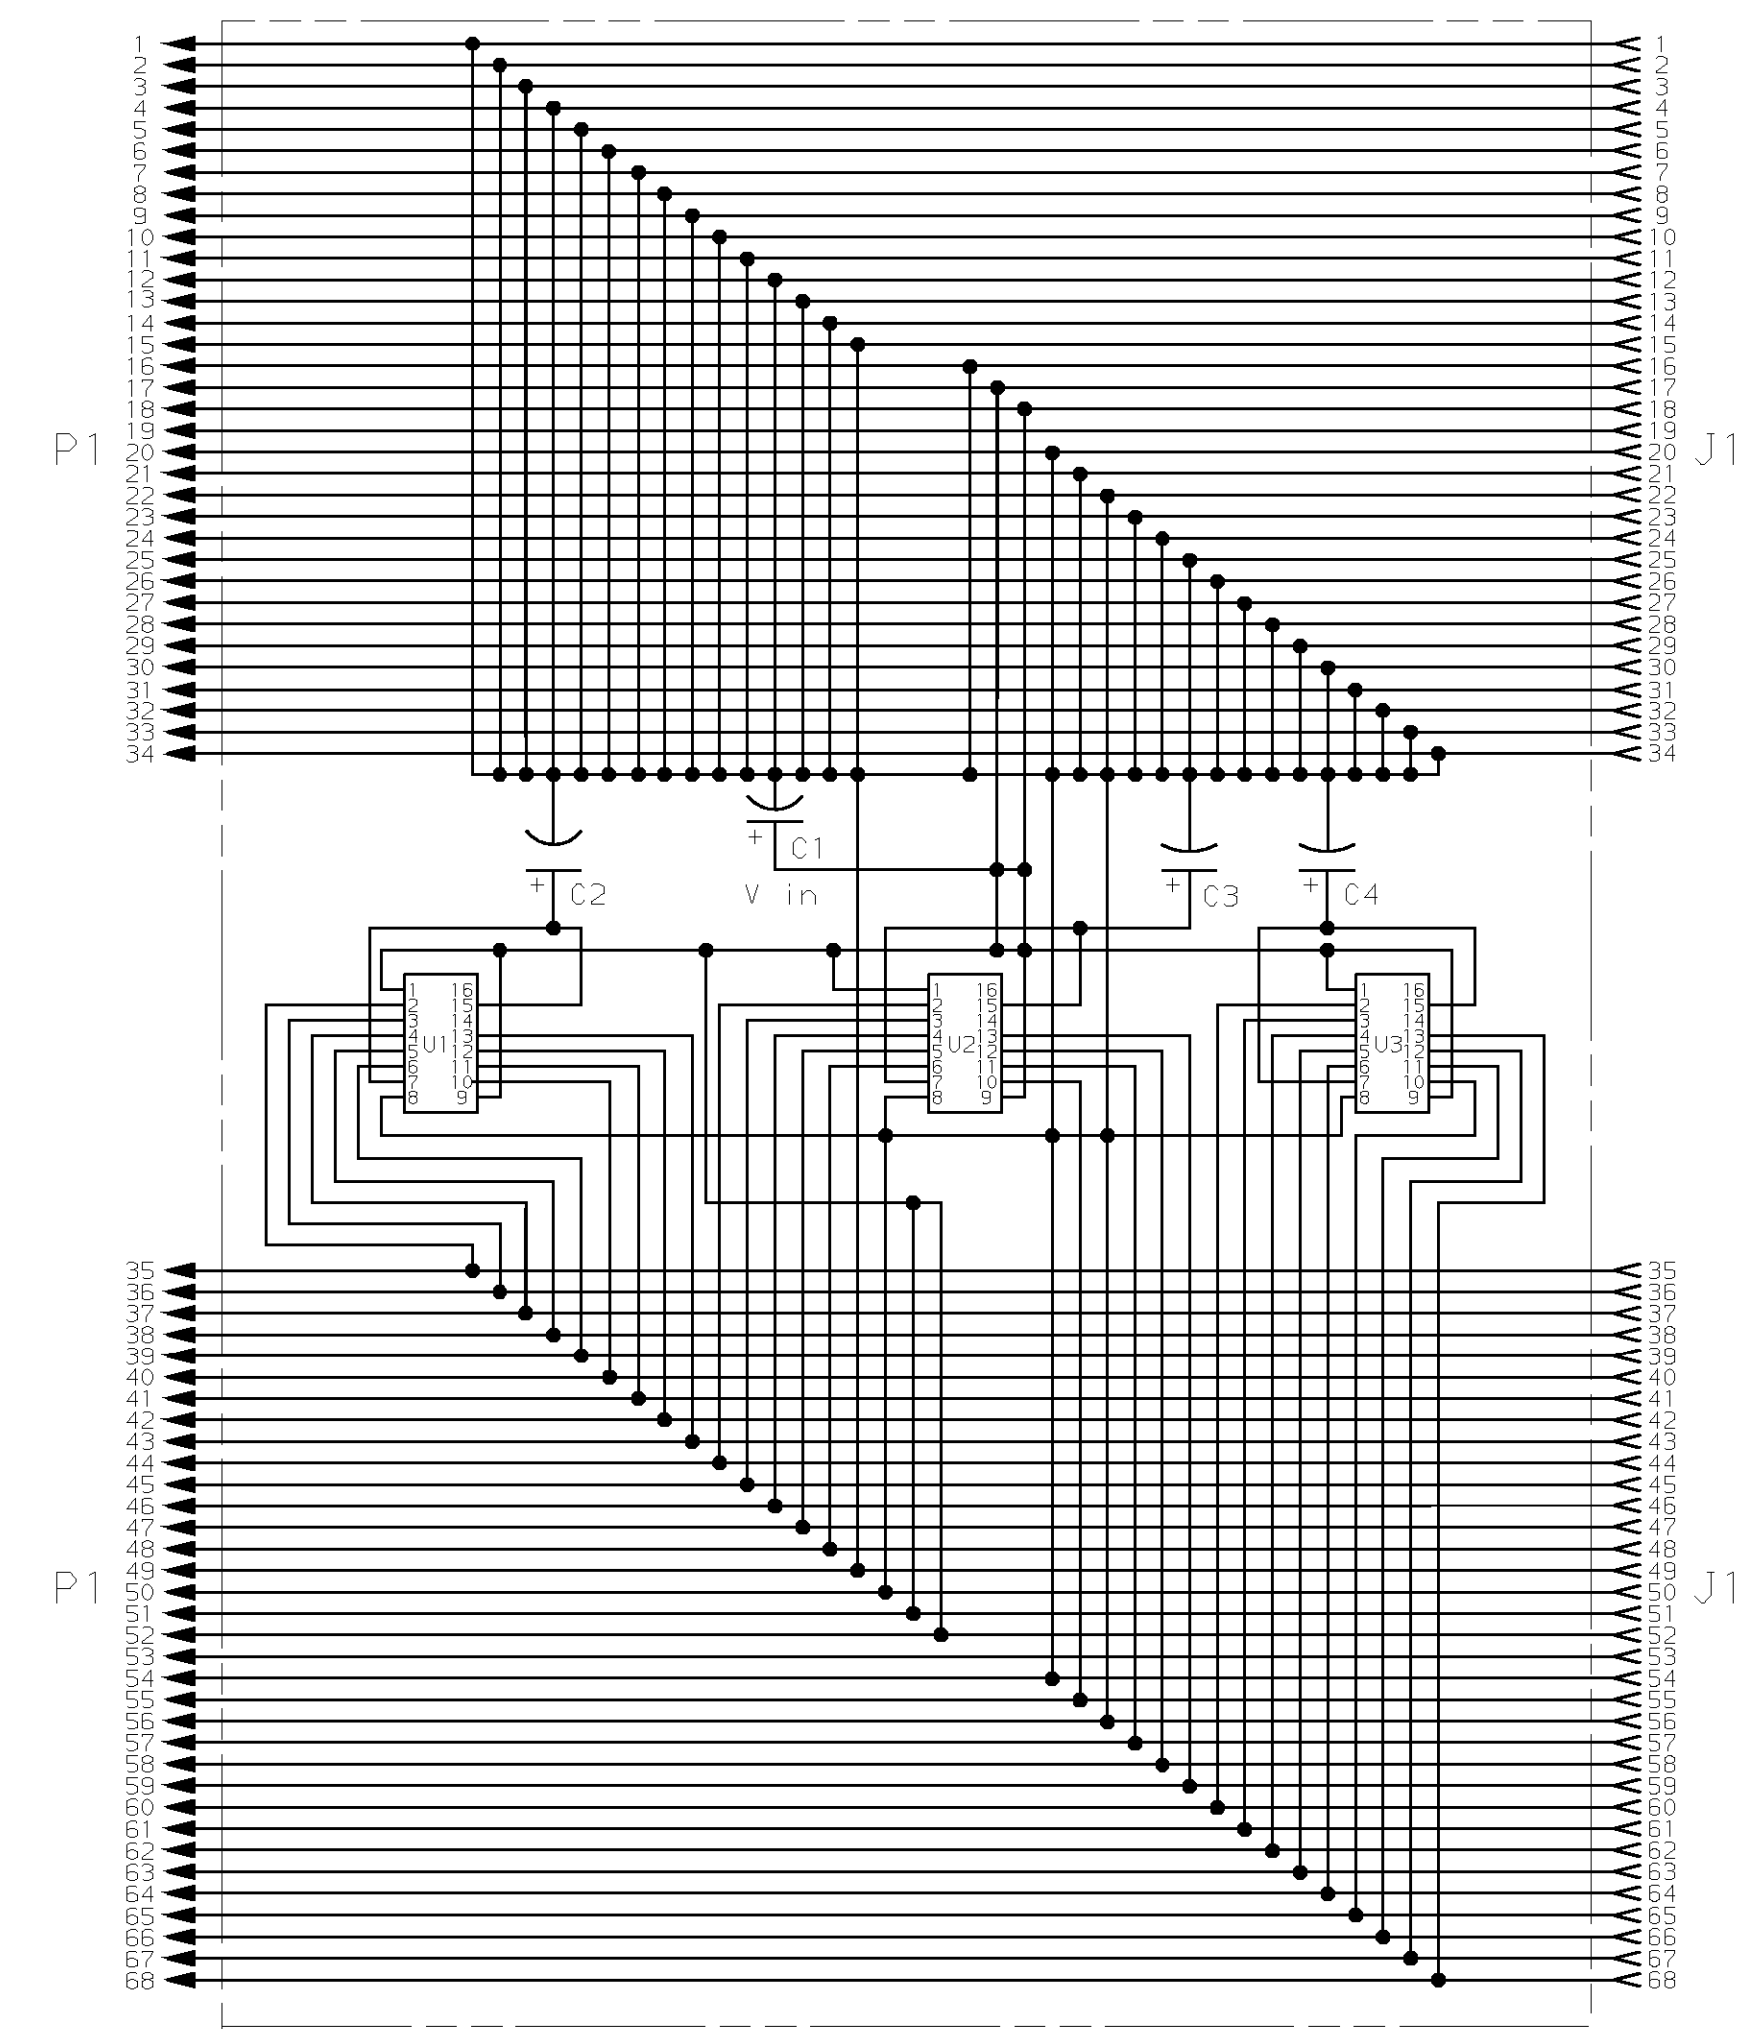

- 1 JACKSCREW BODIES: STAINLESS STEEL; SHELL AND SCREWS: CARBON STEEL; CONTACTS: PHOSPHOR BRONZE; HOUSINGS: POLYESTER, BLACK; SHIELD: COPPER; COVER: ABS, GREY, UL 94V-0; JACKSCREW HEADS: PVC, BEIGE; BRACKETS: ZINC; FLEX FILM CIRCUIT: COPPER ON KAPTON.
- 2 PASSIVATED.
- 3 5.08µm [.000200] MIN TIN OR TIN-LEAD OVER 1.27µm [.000050] MIN COPPER.
- 4 PIN CONTACTS: 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 3.35 [.132] MIN FROM MATING END OVER 1.27µm [.000050] MIN NICKEL; RECEPTACLE CONTACTS: 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 0.64 [.025] MIN, 0.13 [.005] MAX FROM MATING END OVER 1.27µm [.000050] MIN NICKEL.
- 5 76.20µm [.003000] MIN CARBONITRIDE TEMPER.
- 6 3.81µm [.000150] MIN NICKEL OVER 5.08µm [.000200] MIN COPPER.
- 7 C2, C3, AND C4: 4.7µFD TANTALUM CAPACITOR RATED 15 VOLTS MIN; C1: 2.2µFD TANTALUM CAPACITOR RATED 15 VOLTS MIN; CAPACITOR TOLERANCE: ±20%; U1, U2, AND U3: DS2107AS.

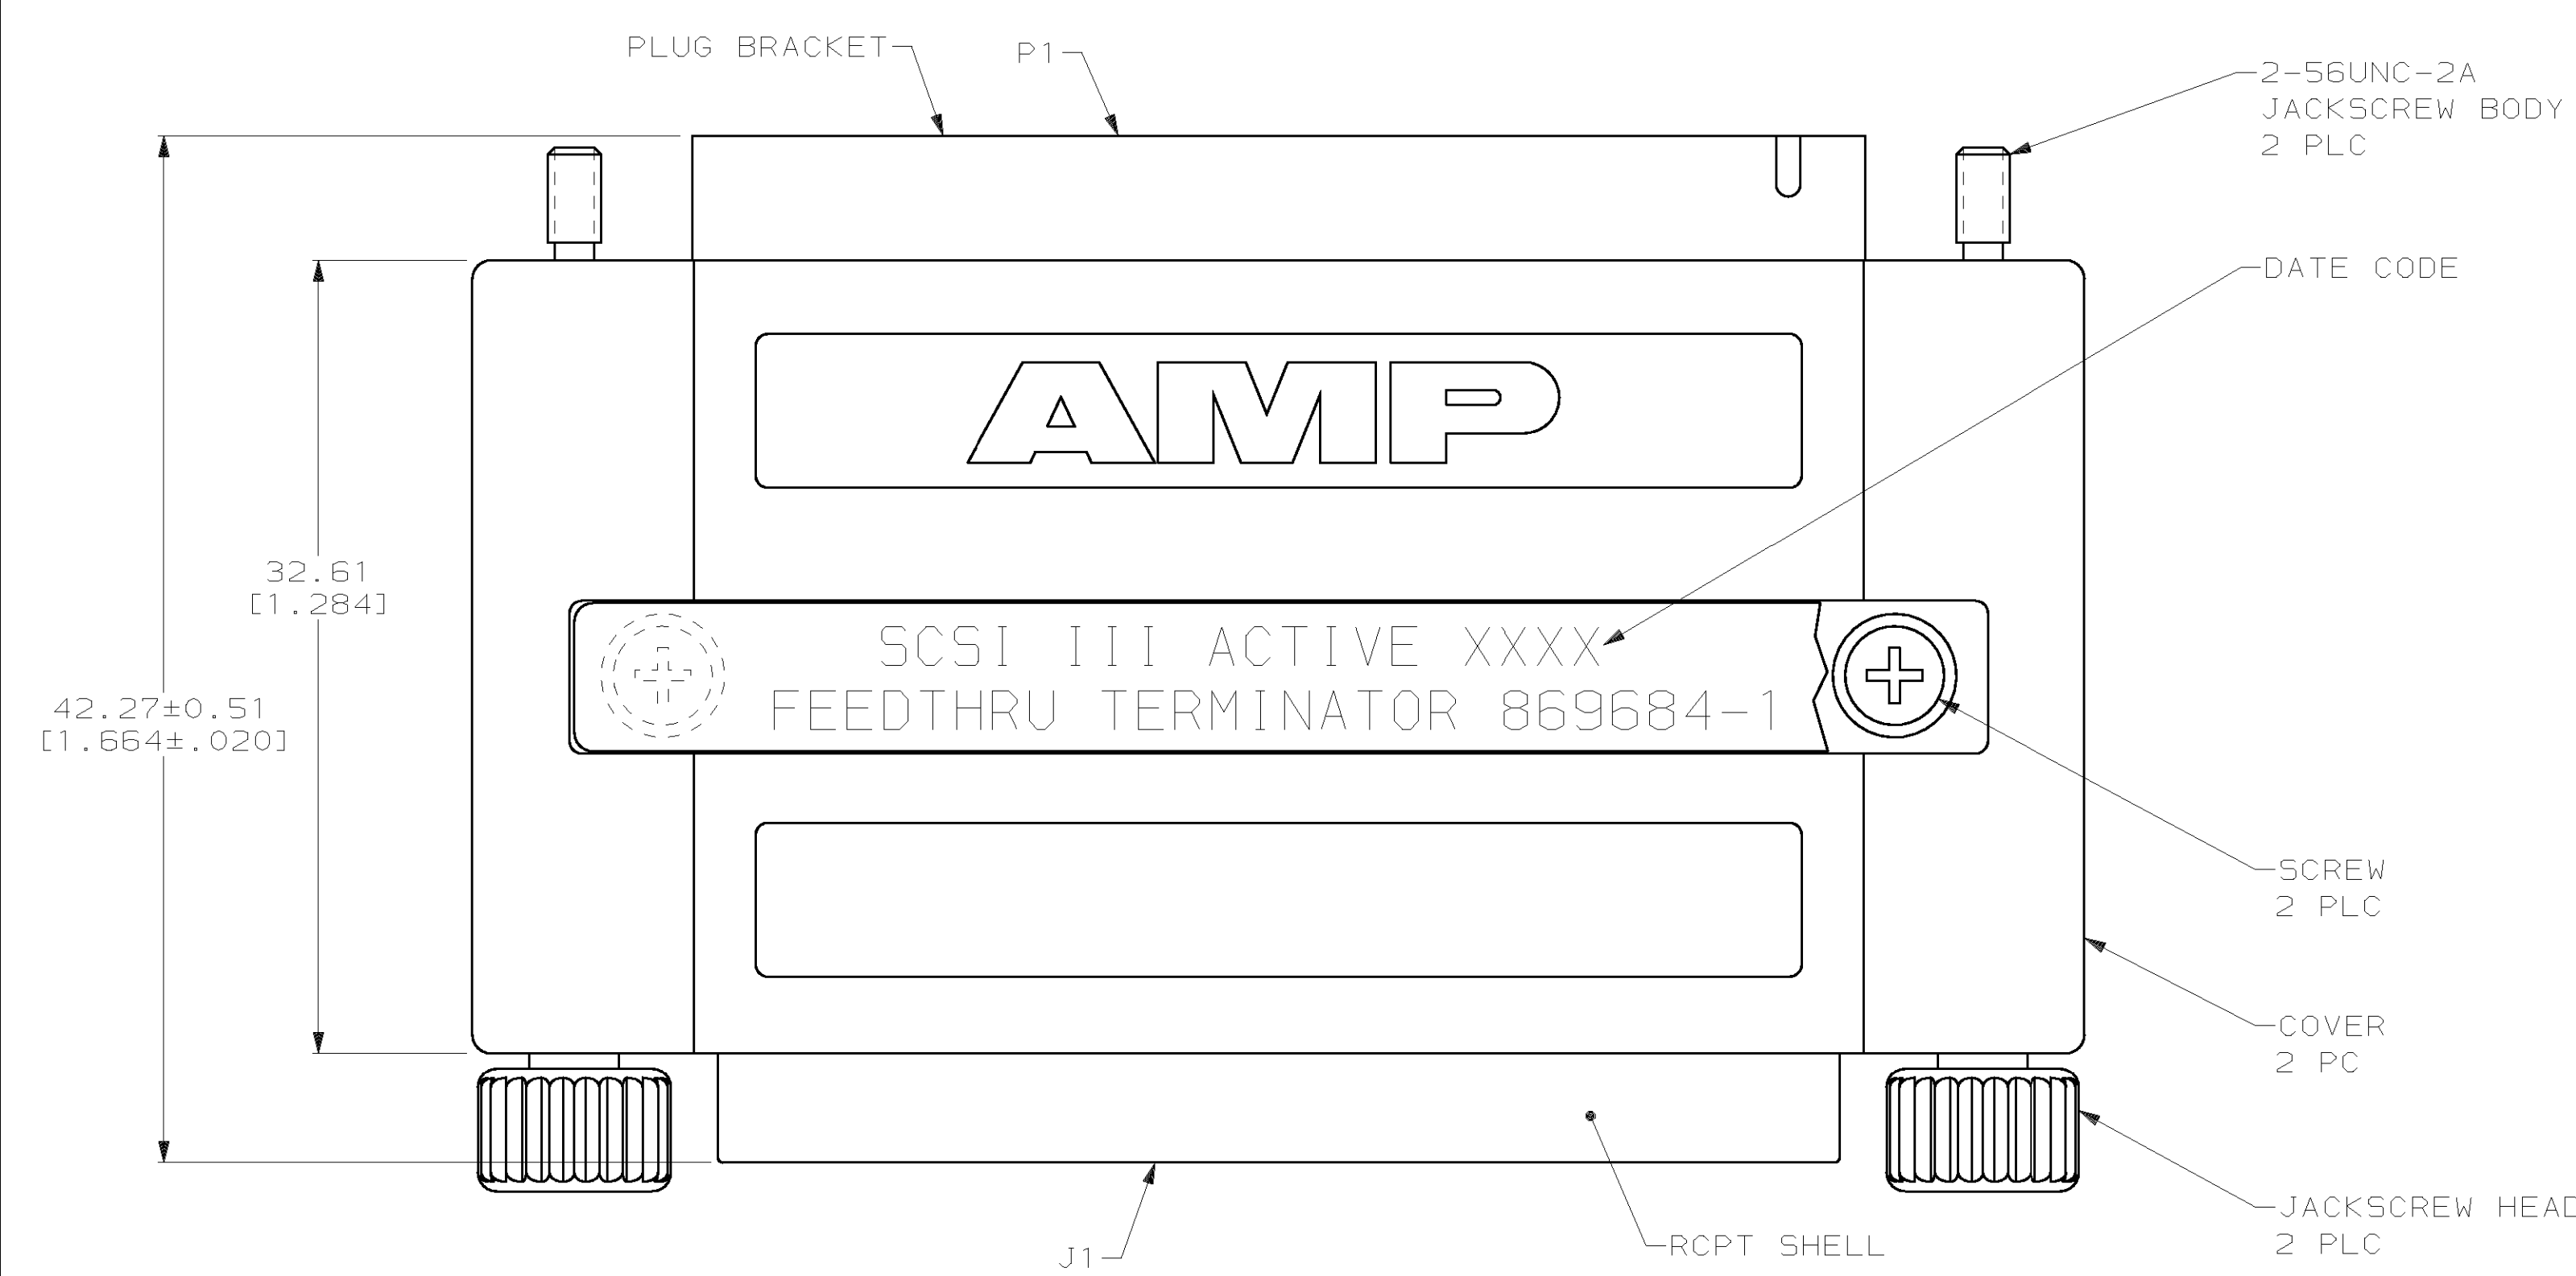

SHIELD SCHEMATIC

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± .013 [.005] ANGLES ± .013 [.005]		DR 2-3-93 J McCLINTON	869684-1 PART NO		
MATERIAL	FINISH	CHK 2-10-93 R. STONE	AMP Incorporated Harrisburg, PA 17105-3608		
	SHELL: 3	APPD 2-15-93 W.D. FLESHMAN	NAME		
	SCREWS: 5	APPD 2-15-93 W.D. FLESHMAN	ADAPTER ASSEMBLY, FEEDTHRU, ACTIVE, SCSII III, .050 SERIES AMPLIMITE™, TERMINATOR		
	JACKSCREW BODIES: 7	PRODUCT SPEC	DRAWING NO		
	CONTACTS: 4	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
	BRACKETS: 6		D	00779	C-869684
		WEIGHT	SCALE	4:1	SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.