


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SBH-001T-P0.5	BH Connector Contact
2	UL1007, 22 AWG	Black

Electrical Specifications
Current: 1.0AAC/DC
Voltage: 600V AC/DC

APPLICABLE HOUSINGS		
NO. OF CIRCUITS	PITCH (mm)	HOUSING PART NO.
2	4.0	BHR-02VS-1
	8.0	BHR-03VS-1
	8.0 (Note 1)	BHR-02(8.0)VS-1N
	12.0	BHR-04VS-1
3	4.0	BHR-03VS-1
	4.0 (Note 2)	BHR-03(4-3)VS-1N
4	4.0	BHR-04VS-1
5	4.0	BHR-05VS-1

Note 1: BHR-02(8.0)VS-1N - 2 circuits 8.0mm pitch plugged up.
 Note 2: BHR-03(4-3)VS-1N - 4 circuits 4.0mm pitch header with circuit No. 3 plugged up.

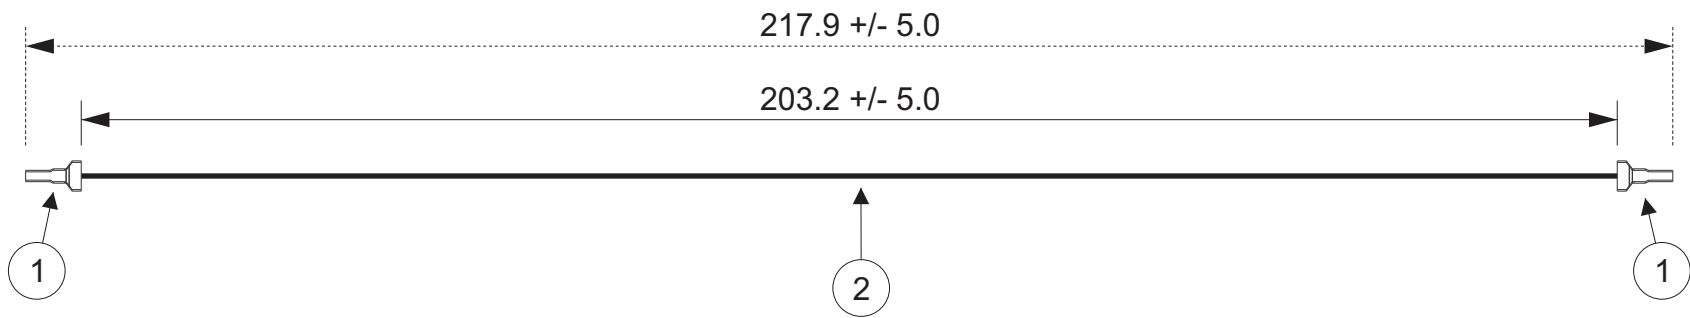

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.					CUSTOMER NAME			
					DESCRIPTION			
					4.0/8.0/12.0mm Pitch BH Series Standard Leads - 8" Inside Length DOUBLE END LEADS			
ZONE	REV	DESCRIPTION	DATE	APPROVED	SIZE	CUSTOMER PART NO.	PART NO.	REV
	1	Add Electrical Specifications	7/02/2018	LM	SCALE 1:1		ASBHSBH22K203	
					Drawn By: Larissa Mosley	DRAWING NO. GAM-392		DATE 5/21/2018
					Checked By: Steven Pilkington			