

т	۵	п –	т	0



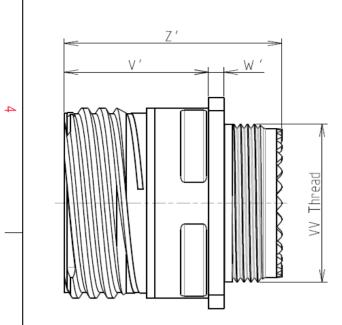



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	 -65°C to +200°C 			
	1 0	•			
	-Salt Spray	: 2000 hours			
	-Mass	: 9.3 g ± 10%			

8D 0

G

11

Μ

02

Ρ

F

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		


ORIENTATION : A

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-02

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

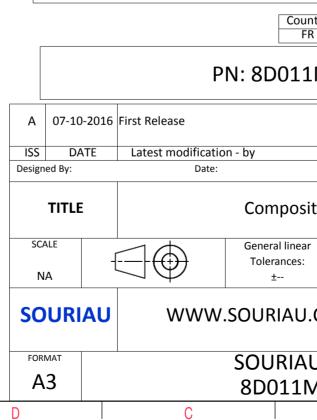

Φ		А				
				4		
6				3		
S EXAMPLE				0		
any non-conformit which does not co of the Parties or I ndation, technical n untry Jurisc	mply with by a third par					
FR	Not Listed			2		
1M02PA						
	CUSTOME	R DRAWING	MOD N°			
site Receptac	e Receptacle 8D series					
ar	NPRDS /	PROJECT				
		59		1		
I.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°	1		SHEET			
M02PA-C		A	1/2	J		
D	1	Λ				

ſ	т	۵		П	m	D	0	
		Contact Layout						Panel Cutou
4	.× .0 (2.	+Y IB IA IA IA IA IA IA IA IA IA IA				2	SQUARE FLANGE RECEPTACLE (TYP REAR MOUNTING	PE 0)
	Shell Arrangement size no. 11 -2	tion X-axis Y-axis (mm) (mm) +.095 (2.41) +.000 (.00)	Contact location All			<u>.</u>		ØA Dim
ω								ØA ØAA R1 ØT
							the Specifications iss	the Products wh sued by either of al recommendat
N							PN	Countr FR
						A 07-10- ISS DA Designed By:	2016 First Release TE Latest modification - Date:	- by
_						SCALE NA		General linear Tolerances: ±
						FORMAT		ouriau.c
	Н	G		F	E	A3		8D011M
						¥		

